



## 12N65-TC


Power MOSFET

### 12A, 650V N-CHANNEL POWER MOSFET

#### DESCRIPTION

The UTC **12N65-TC** are N-Channel enhancement mode power field effect transistors (MOSFET) which are produced using UTC's proprietary, planar stripe, DMOS technology.


These devices are suited for high efficiency switch mode power supply. To minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode the advanced technology has been especially tailored.

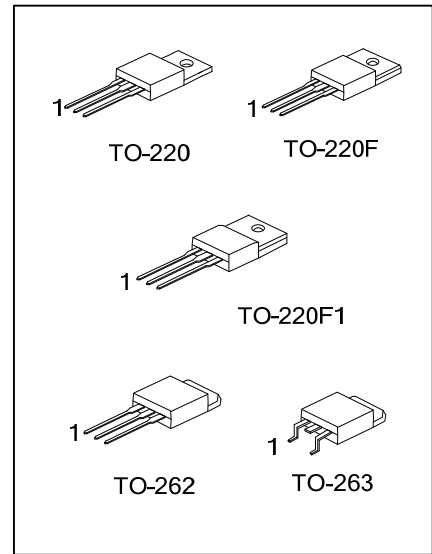

#### FEATURES

- \*  $R_{DS(ON)} \leq 0.8\Omega$  @  $V_{GS}=10V, I_D=6.0A$
- \* Fast switching capability
- \* Avalanche energy specified
- \* Improved dv/dt capability, high ruggedness

#### SYMBOL




#### ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
12N65L-TA3-T	12N65G-TA3-T	TO-220	G	D	S	Tube
12N65L-TF1-T	12N65G-TF1-T	TO-220F1	G	D	S	Tube
12N65L-TF3-T	12N65G-TF3-T	TO-220F	G	D	S	Tube
12N65L-T2Q-T	12N65G-T2Q-T	TO-262	G	D	S	Tube
12N65L-TQ2-T	12N65G-TQ2-T	TO-263	G	D	S	Tube
12N65L-TQ2-R	12N65G-TQ2-R	TO-263	G	D	S	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

<p>12N65G-TA3-T</p>	<p>(1) T: Tube, R: Tape Reel  (2) TA3: TO-220, TF1: TO-220F1, TF3: TO-220F  T2Q: TO-262, TQ2: TO-263  (3) G: Halogen Free and Lead Free, L: Lead Free</p>
---------------------	---

## MARKING

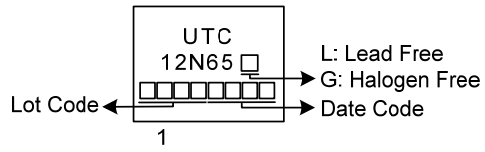

FLYING 汎翔國際有限公司  
www.flying1688.com

■ ABSOLUTE MAXIMUM RATINGS ( $T_C = 25^\circ\text{C}$ , unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		$V_{DSS}$	650	V
Gate-Source Voltage		$V_{GSS}$	$\pm 30$	V
Drain Current	Continuous	$I_D$	12	A
	Pulsed (Note 2)	$I_{DM}$	24	A
Avalanche Energy	Single Pulsed (Note 3)	$E_{AS}$	245	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	2.9	V/ns
Power Dissipation	TO-220/TO-220F	$P_D$	225	W
	TO-262/TO-263			
	TO-220F1		51	W
Junction Temperature		$T_J$	+150	$^\circ\text{C}$
Storage Temperature		$T_{STG}$	-55 ~ +150	$^\circ\text{C}$

- Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.  
 2. Repetitive Rating : Pulse width limited by maximum junction temperature.  
 3.  $L = 10\text{mH}$ ,  $I_{AS} = 7\text{A}$ ,  $V_{DD} = 50\text{V}$ ,  $R_G = 25\Omega$ , Starting  $T_J = 25^\circ\text{C}$   
 4.  $I_{SD} \leq 12\text{A}$ ,  $di/dt \leq 200\text{A/s}$ ,  $V_{DD} \leq BV_{DSS}$  Starting  $T_J = 25^\circ\text{C}$

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient		$\theta_{JA}$	62.5	$^\circ\text{C/W}$
Junction to Case	TO-220/TO-262	$\theta_{JC}$	0.56	$^\circ\text{C/W}$
	TO-262/TO-263			
	TO-220F/TO-220F1		2.43	$^\circ\text{C/W}$


■ ELECTRICAL CHARACTERISTICS (T<sub>C</sub>=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>OFF CHARACTERISTICS</b>						
Drain-Source Breakdown Voltage	BV <sub>DSS</sub>	V <sub>GS</sub> =0V, I <sub>D</sub> =250μA	650			V
Drain-Source Leakage Current	I <sub>DSS</sub>	V <sub>DS</sub> =650V, V <sub>GS</sub> =0V			10	μA
Gate-Source Leakage Current	I <sub>GSS</sub>	V <sub>GS</sub> =±30V, V <sub>DS</sub> =0V			±100	nA
<b>ON CHARACTERISTICS</b>						
Gate Threshold Voltage	V <sub>GS(TH)</sub>	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250μA	2.0		4.0	V
Static Drain-Source On-State Resistance	R <sub>DS(ON)</sub>	V <sub>GS</sub> =10V, I <sub>D</sub> =6.0A		0.65	0.8	Ω
<b>DYNAMIC CHARACTERISTICS</b>						
Input Capacitance	C <sub>ISS</sub>	V <sub>DS</sub> =25V, V <sub>GS</sub> =0V, f=1MHz		1790		pF
Output Capacitance	C <sub>OSS</sub>			158		pF
Reverse Transfer Capacitance	C <sub>RSS</sub>			4.5		pF
<b>SWITCHING CHARACTERISTICS</b>						
Total Gate Charge	Q <sub>G</sub>	V <sub>DS</sub> =100V, V <sub>GS</sub> =12V, I <sub>D</sub> =12A I <sub>G</sub> =1mA (Note1,2)		45		nC
Gate-Source Charge	Q <sub>GS</sub>			10		nC
Gate-Drain Charge	Q <sub>GD</sub>			5		nC
Turn-On Delay Time	t <sub>D(ON)</sub>	V <sub>DD</sub> =100V, V <sub>GS</sub> =10V, I <sub>D</sub> =12A, R <sub>G</sub> =25Ω (Note1,2)		27		ns
Turn-On Rise Time	t <sub>R</sub>			20		ns
Turn-Off Delay Time	t <sub>D(OFF)</sub>			92		ns
Turn-Off Fall Time	t <sub>F</sub>			31		ns
<b>SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS</b>						
Maximum Continuous Drain-Source Diode Forward Current	I <sub>S</sub>				12	A
Maximum Pulsed Drain-Source Diode Forward Current	I <sub>SM</sub>				24	A
Drain-Source Diode Forward Voltage	V <sub>SD</sub>	V <sub>GS</sub> =0V, I <sub>S</sub> =12A			1.4	V
Reverse Recovery Time	t <sub>rr</sub>	V <sub>GS</sub> =0V, I <sub>S</sub> =12A, dI <sub>F</sub> /dt=100A/μs(Note1)		392		ns
Reverse Recovery Charge	Q <sub>rr</sub>				5.2	


Notes: 1. Pulse Test : Pulse width ≤300μs, Duty cycle ≤ 2%.

2. Essentially independent of operating temperature.

■ TEST CIRCUITS AND WAVEFORMS

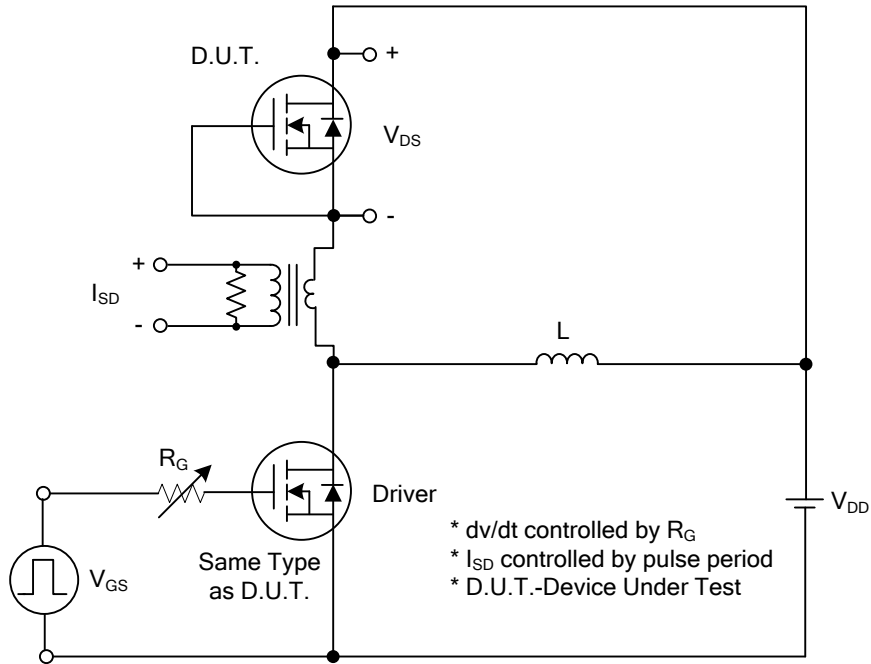


Peak Diode Recovery dv/dt Test Circuit

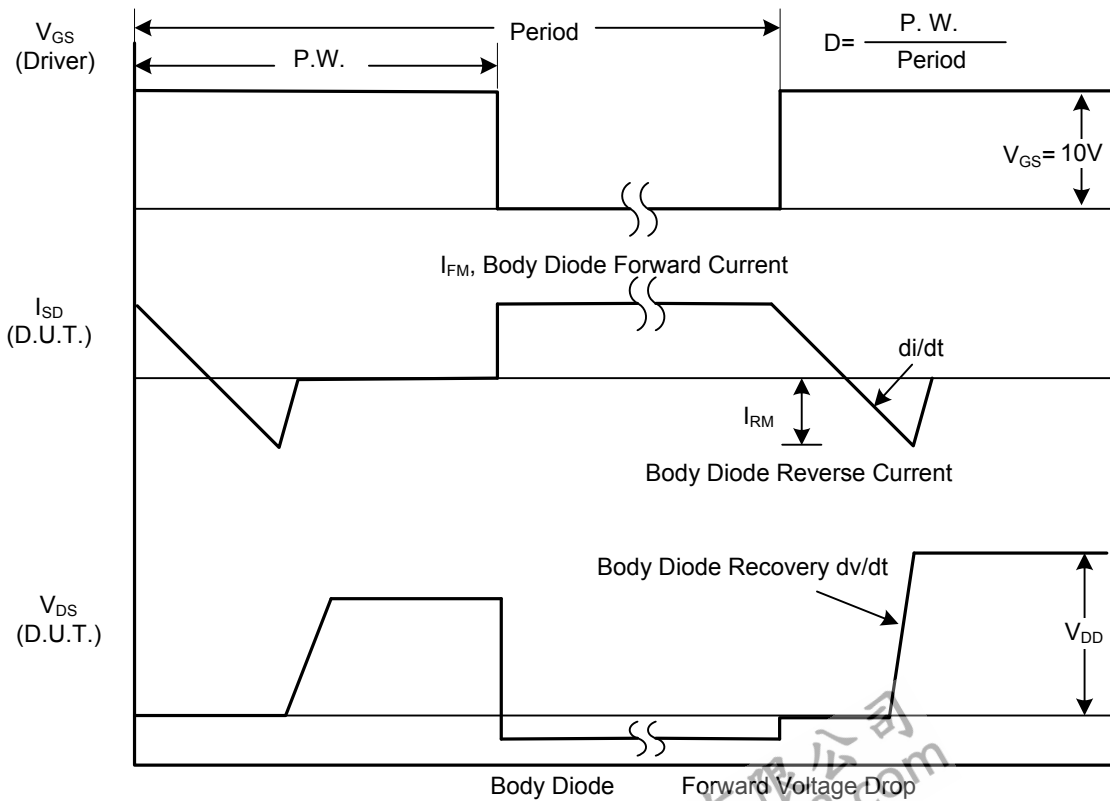


Peak Diode Recovery dv/dt Waveforms


### TEST CIRCUITS AND WAVEFORMS

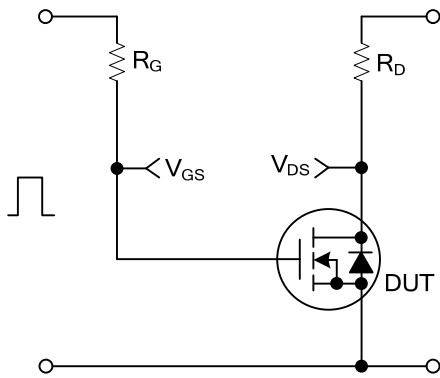


Switching Test Circuit

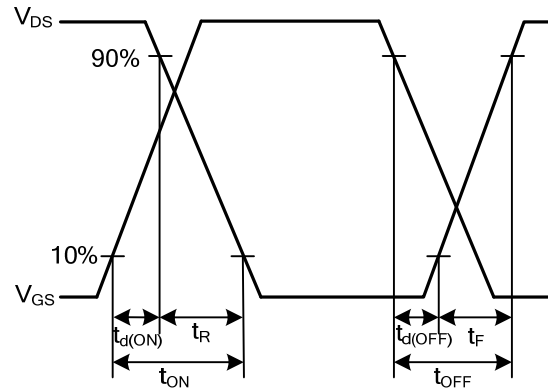


Switching Waveforms

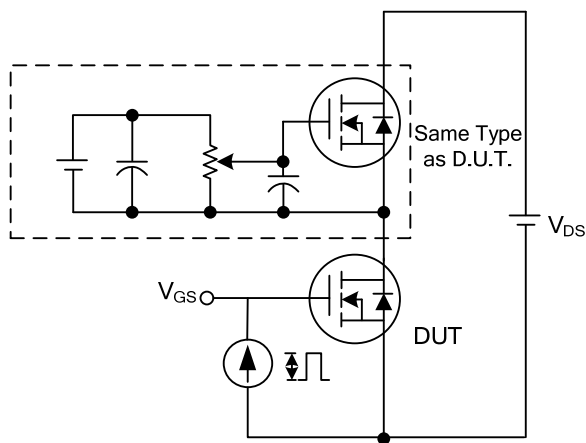


Gate Charge Test Circuit

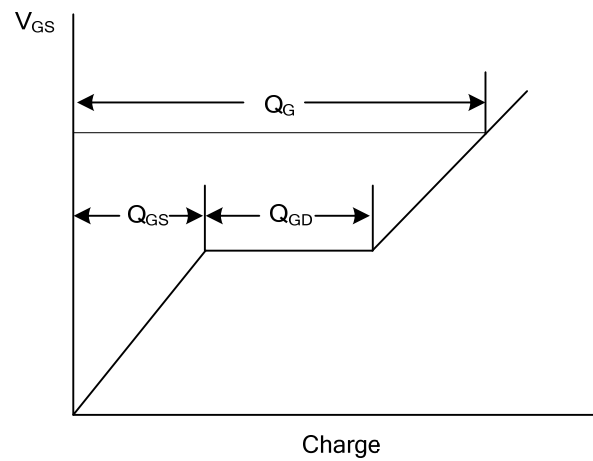

Gate Charge Waveform






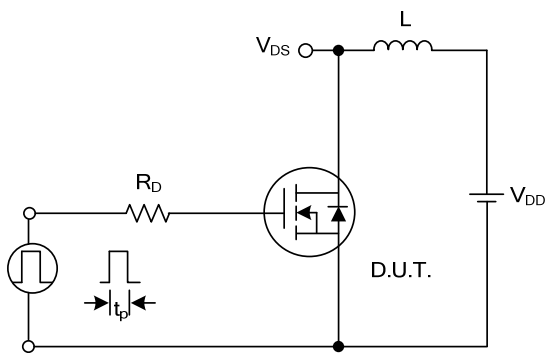


Unclamped Inductive Switching Test Circuit






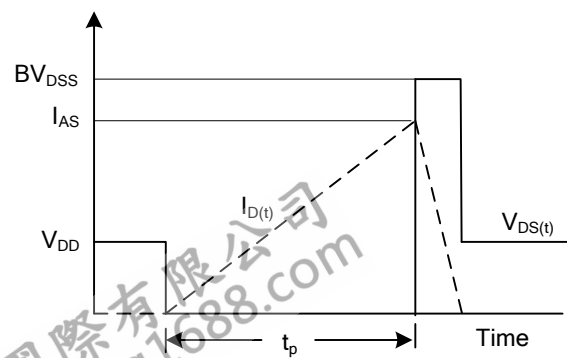


Unclamped Inductive Switching Waveforms

## TYPICAL CHARACTERISTICS

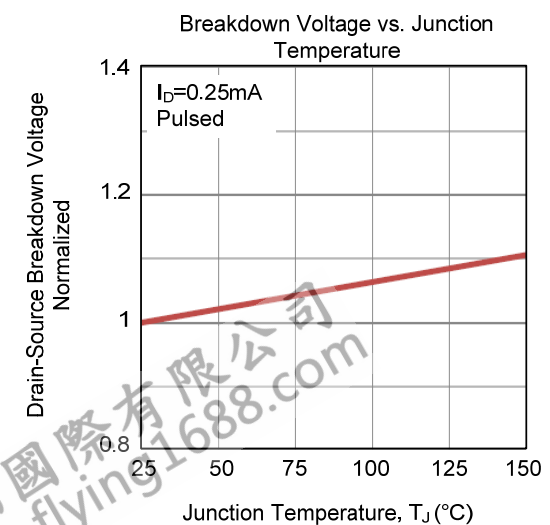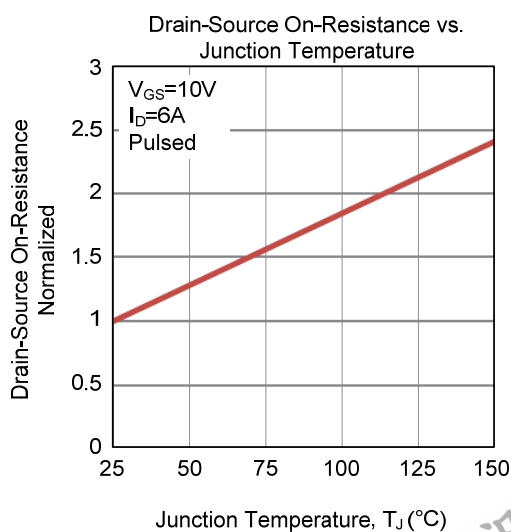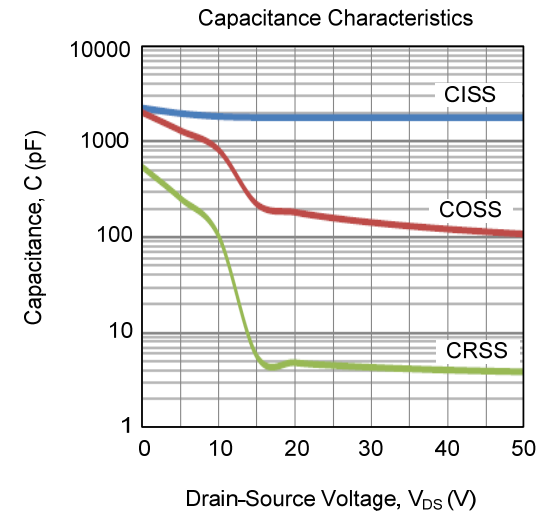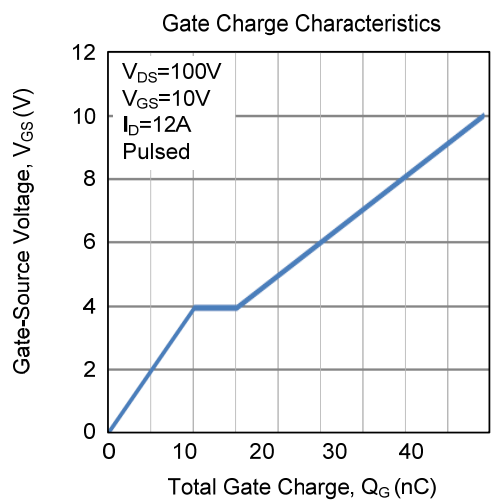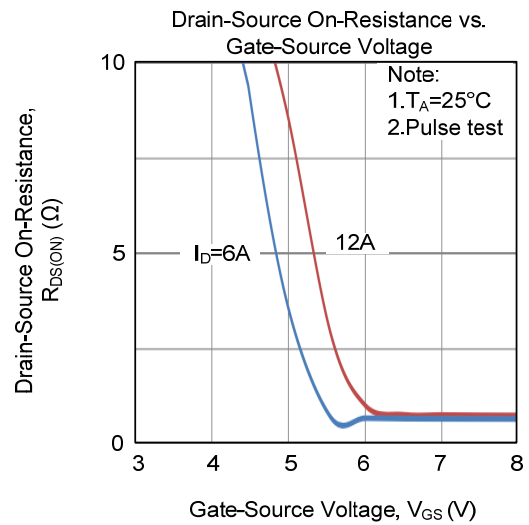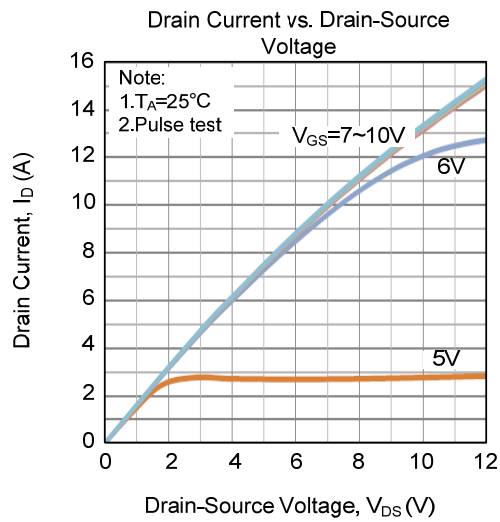


## TYPICAL CHARACTERISTICS (Cont.)

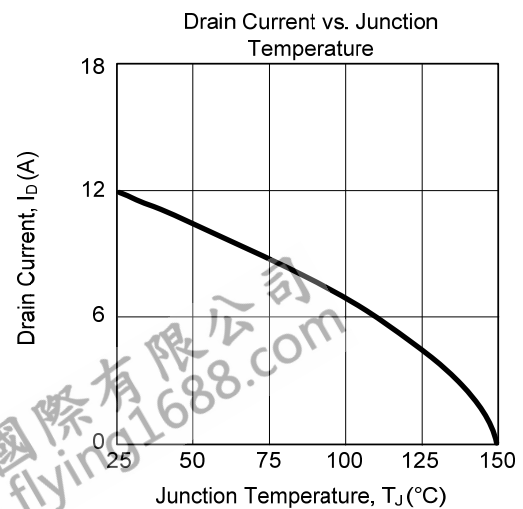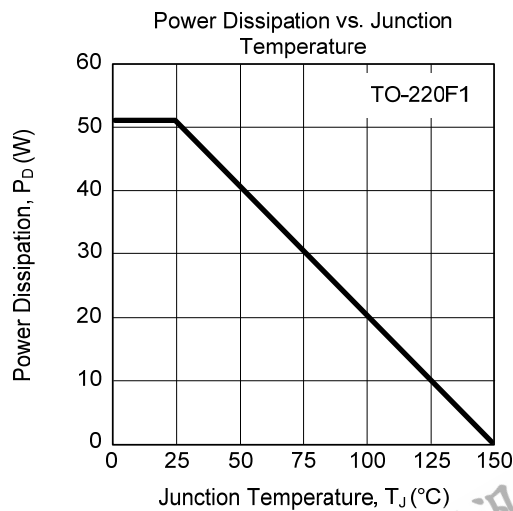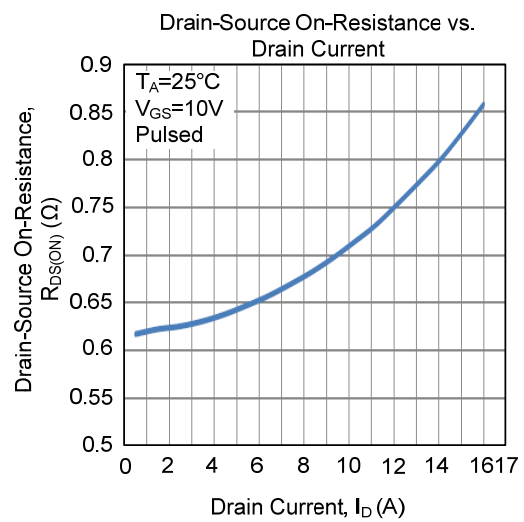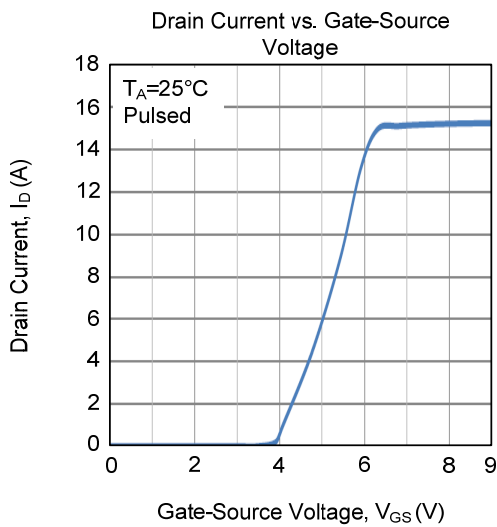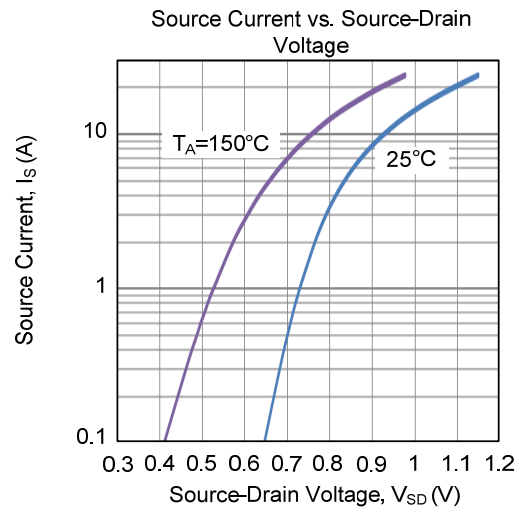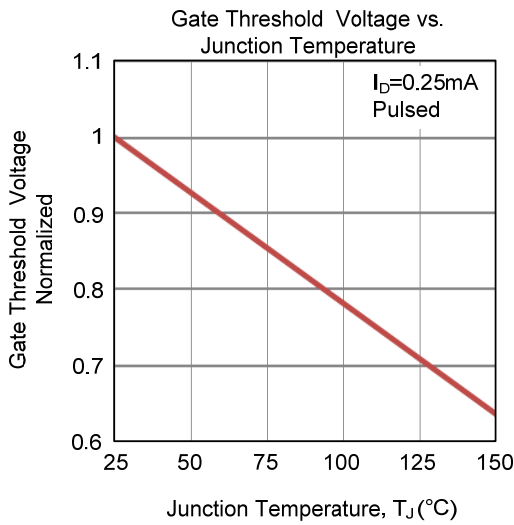



■ TYPICAL CHARACTERISTICS (Cont.)

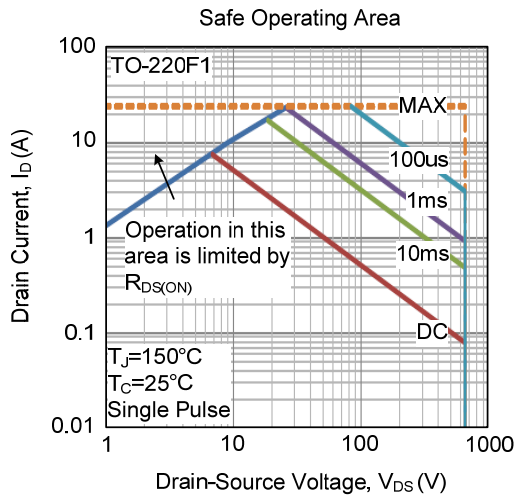

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.