



12N70K-MT

Power MOSFET

12A, 700V N-CHANNEL POWER MOSFET

DESCRIPTION



The UTC **12N70K-MT** are N-Channel enhancement mode power MOSFET which are produced using UTC's proprietary, planar stripe, DMOS technology.

These devices are suited for high efficiency switch mode power supply. To minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode the advanced technology has been especially tailored.

FEATURES

- * $R_{DS(ON)} \leq 0.83\Omega$ @ $V_{GS}=10V, I_D=6.0A$
- * Fast switching capability
- * Avalanche energy specified
- * Improved dv/dt capability, high ruggedness

SYMBOL

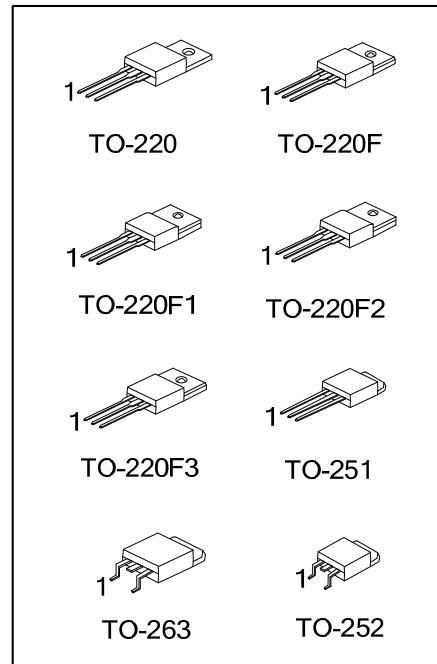


ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
12N70KL-TA3-T	12N70KG-TA3-T	TO-220	G	D	S	Tube
12N70KL-TF1-T	12N70KG-TF1-T	TO-220F1	G	D	S	Tube
12N70KL-TF2-T	12N70KG-TF2-T	TO-220F2	G	D	S	Tube
12N70KL-TF3T-T	12N70KG-TF3T-T	TO-220F3	G	D	S	Tube
12N70KL-TF3-T	12N70KG-TF3-T	TO-220F	G	D	S	Tube
12N70KL-TM3-T	12N70KG-TM3-T	TO-251	G	D	S	Tube
12N70KL-TN3-R	12N70KG-TN3-R	TO-252	G	D	S	Tape Reel
12N70KL-TQ2-T	12N70KG-TQ2-T	TO-263	G	D	S	Tube
12N70KL-TQ2-R	12N70KG-TQ2-R	TO-263	G	D	S	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

<p>12N70KG-TA3-T</p> <p>(1) Packing Type (2) Package Type (3) Green Package</p>	<p>(1) T: Tube, R: Tape Reel (2) TA3: TO-220, TF3: TO-220F, TF1: TO-220F1, TF2: TO-220F2, TF3T: TO-220F3, TM3: TO-251, TN3: TO-252, TQ2: TO-263 (3) G: Halogen Free and Lead Free, L: Lead Free</p>
---	---

MARKING

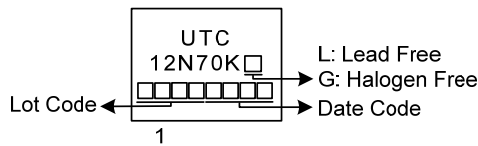

FLYING 汎翔國際有限公司
 www.flying1688.com

■ ABSOLUTE MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	700	V
Gate-Source Voltage		V_{GSS}	± 30	V
Drain Current	Continuous	I_D	12	A
	Pulsed (Note 2)	I_{DM}	24	A
Avalanche Energy	Single Pulsed (Note 3)	E_{AS}	170	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	2.9	V/ns
Power Dissipation	TO-220/TO-263	P_D	140	W
	TO-220F/ TO-220F1		34	W
	TO-220F3		36	W
	TO-220F2		50	W
	TO-251/TO-252			
Junction Temperature		T_J	+150	$^\circ\text{C}$
Operating Temperature		T_{OPR}	-55 ~ +150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature.

3. $L=10\text{mH}$, $I_{AS}=5.8\text{A}$, $V_{DD}=50\text{V}$, $R_G=25\Omega$, Starting $T_J=25^\circ\text{C}$

4. $I_{SD} \leq 12\text{A}$, $di/dt \leq 200\text{A}/\mu\text{s}$, $V_{DD} \leq BV_{DSS}$, Starting $T_J=25^\circ\text{C}$

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-220/TO-220F	θ_{JA}	62.5	$^\circ\text{C}/\text{W}$
	TO-220F1/TO-220F2			
	TO-220F3/TO-263			
	TO-251/TO-252			
Junction to Case	TO-220/TO-263	θ_{JC}	0.89	$^\circ\text{C}/\text{W}$
	TO-220F/ TO-220F1		3.68	$^\circ\text{C}/\text{W}$
	TO-220F3		3.47	$^\circ\text{C}/\text{W}$
	TO-220F2		2.5	$^\circ\text{C}/\text{W}$
	TO-251/TO-252			


■ ELECTRICAL CHARACTERISTICS ($T_J=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	700			V
Drain-Source Leakage Current	I_{DSS}	$V_{DS}=700V, V_{GS}=0V$			10	μA
Gate-Source Leakage Current	I_{GSS}	$V_{GS}=\pm 30V, V_{DS}=0V$			± 100	nA
Breakdown Voltage Temperature Coefficient	$\Delta BV_{DSS}/\Delta T_J$	$I_D=250\mu A$, Referenced to 25°C		0.7		$V/^\circ\text{C}$
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	2.0		4.0	V
Static Drain-Source On-State Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=6.0A$		0.70	0.83	Ω
DYNAMIC CHARACTERISTICS						
Input Capacitance	C_{ISS}	$V_{DS}=25V, V_{GS}=0V, f=1\text{MHz}$		2000		pF
Output Capacitance	C_{OSS}			160		pF
Reverse Transfer Capacitance	C_{RSS}			7		pF
SWITCHING CHARACTERISTICS						
Total Gate Charge	Q_G	$V_{DS}=560V, V_{GS}=10V, I_D=12A$ (Note 1, 2)		40		nC
Gate-Source Charge	Q_{GS}			10		nC
Gate-Drain Charge	Q_{GD}			7		nC
Turn-On Delay Time	$t_{D(ON)}$	$V_{DD}=100V, I_D=12A, R_G=25\Omega$ (Note 1, 2)		28		ns
Turn-On Rise Time	t_R			21		ns
Turn-Off Delay Time	$t_{D(OFF)}$			122		ns
Turn-Off Fall Time	t_F			37		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Maximum Continuous Drain-Source Diode Forward Current	I_S				12	A
Maximum Pulsed Drain-Source Diode Forward Current	I_{SM}				24	A
Drain-Source Diode Forward Voltage	V_{SD}	$I_S=12A, V_{GS}=0V$			1.4	V
Reverse Recovery Time	t_{rr}	$I_S=12A, V_{GS}=0V$ $di/dt=200A/\mu s$ (Note 1)		534		ns
Reverse Recovery Charge	Q_{rr}				5.7	


Notes: 1. Pulse Test: Pulse width $\leq 300\mu s$, Duty cycle $\leq 2\%$.

2. Essentially independent of operating temperature.

TEST CIRCUITS AND WAVEFORMS

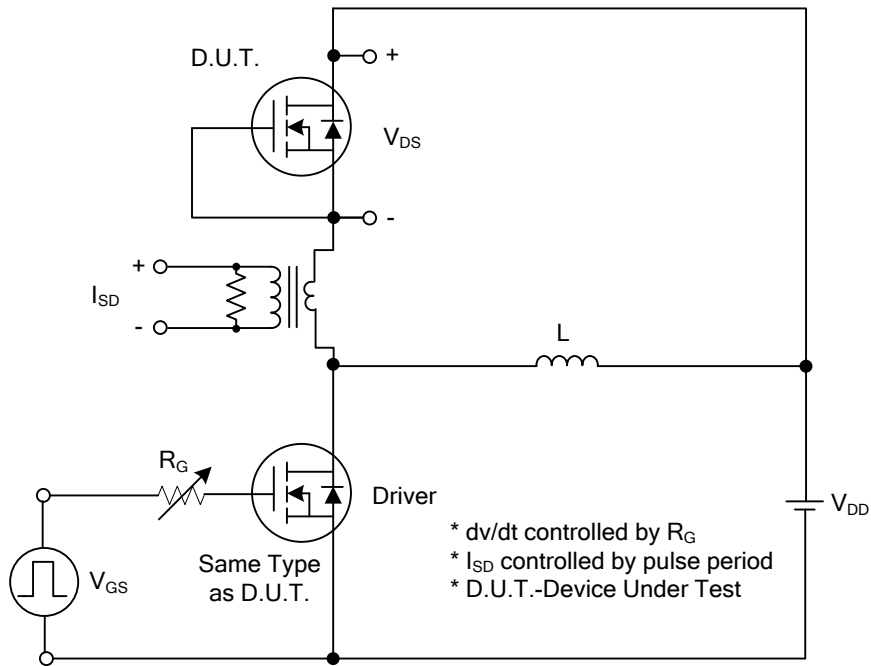


Peak Diode Recovery dv/dt Test Circuit

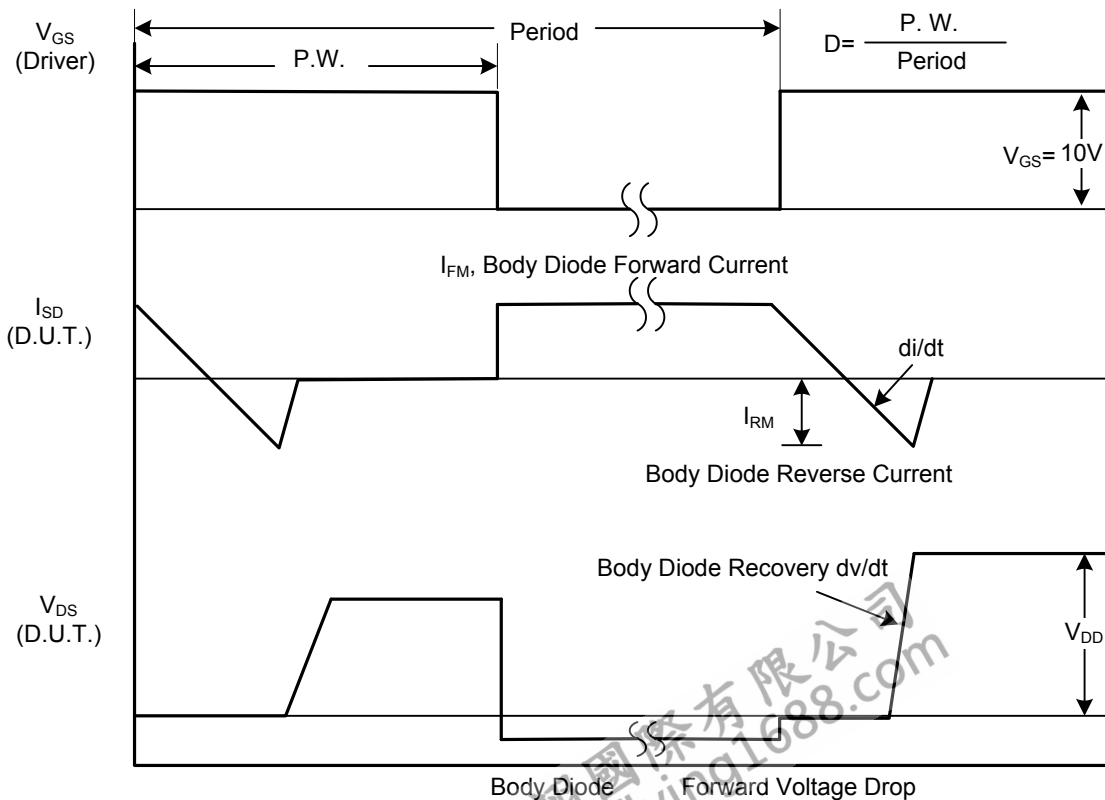


Peak Diode Recovery dv/dt Waveforms


TEST CIRCUITS AND WAVEFORMS

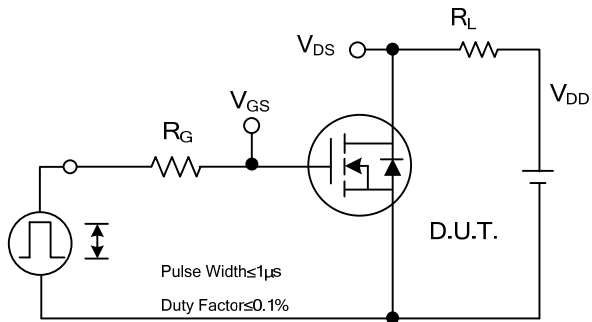


Switching Test Circuit

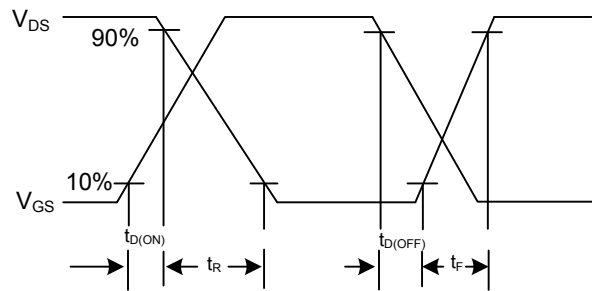


Switching Waveforms

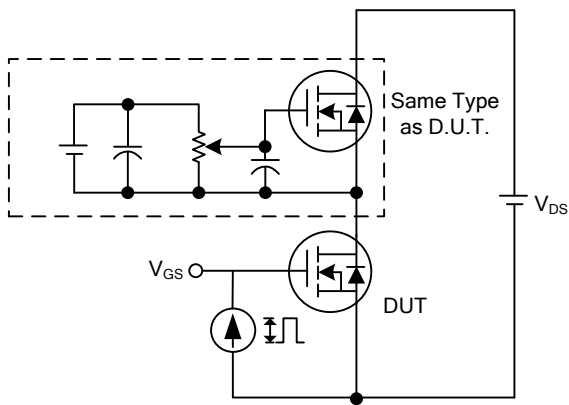


Gate Charge Test Circuit

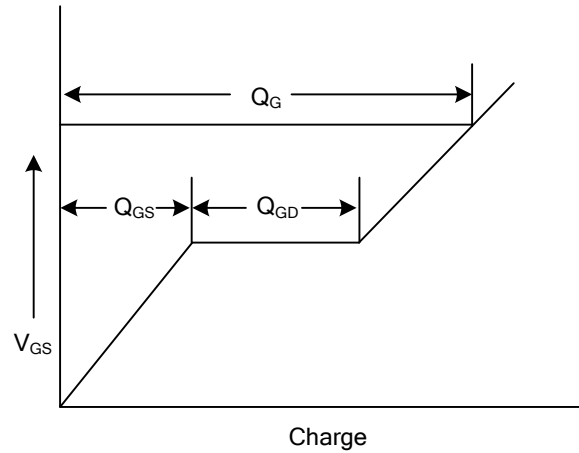

Gate Charge Waveform






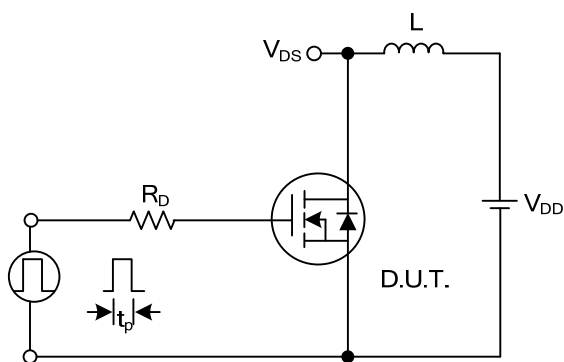


Unclamped Inductive Switching Test Circuit






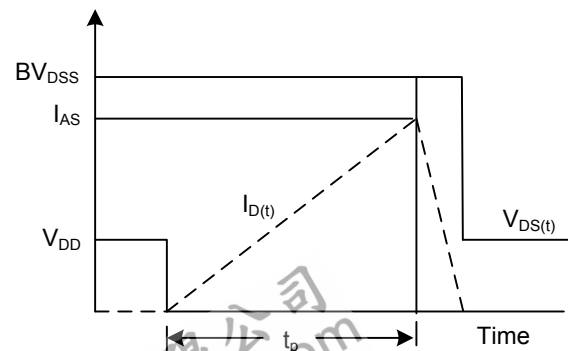


Unclamped Inductive Switching Waveforms


TYPICAL CHARACTERISTICS

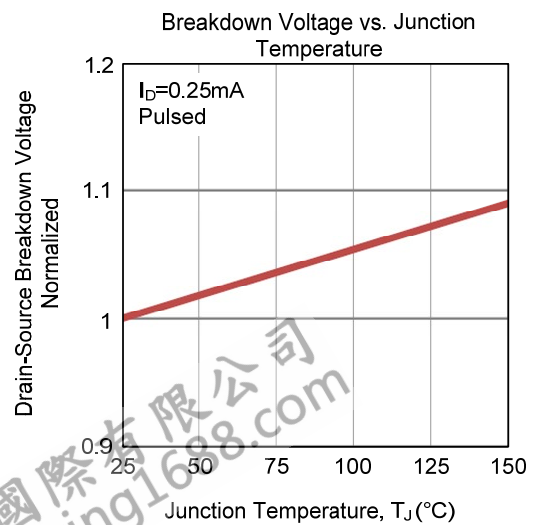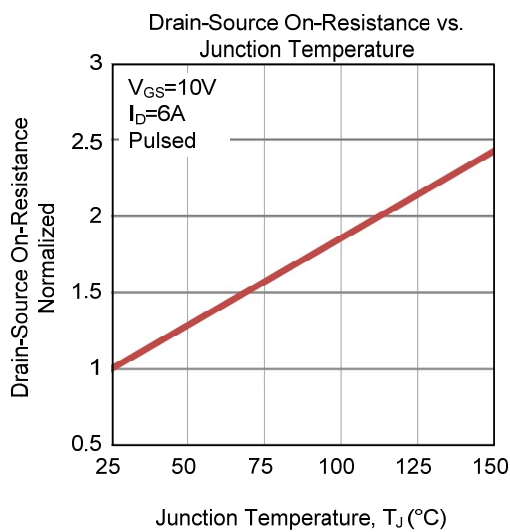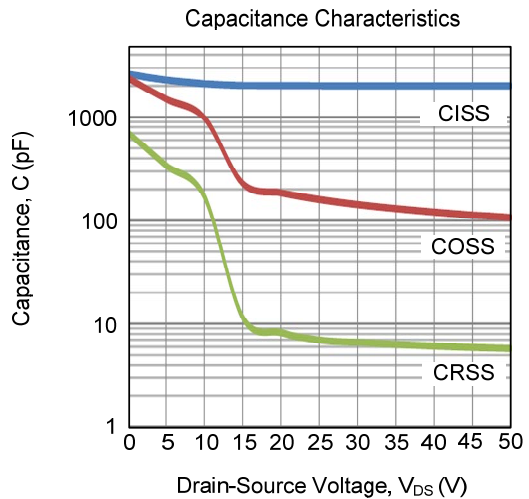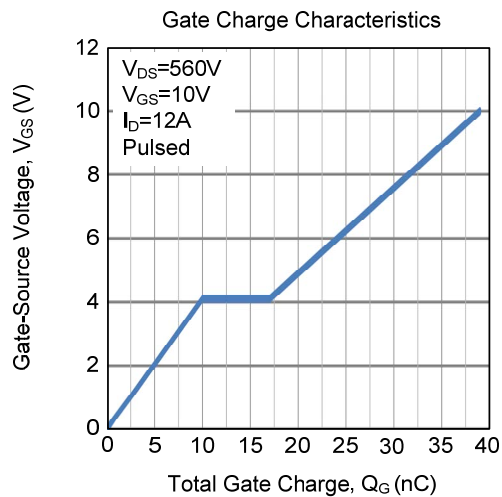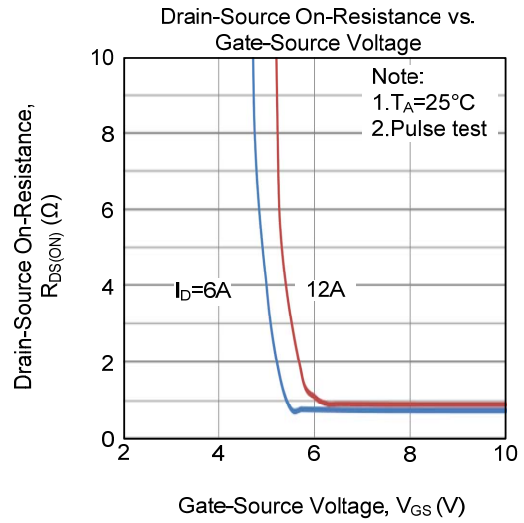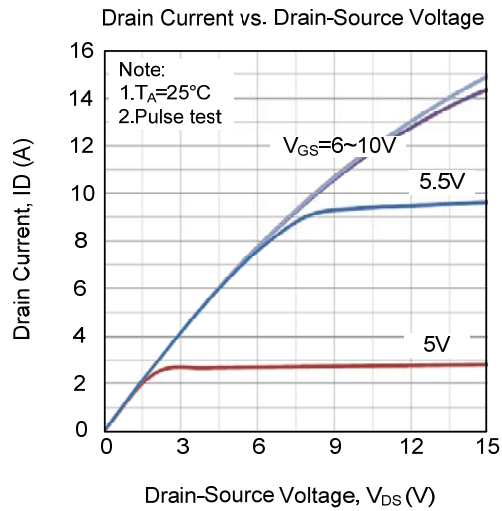

TYPICAL CHARACTERISTICS (Cont.)

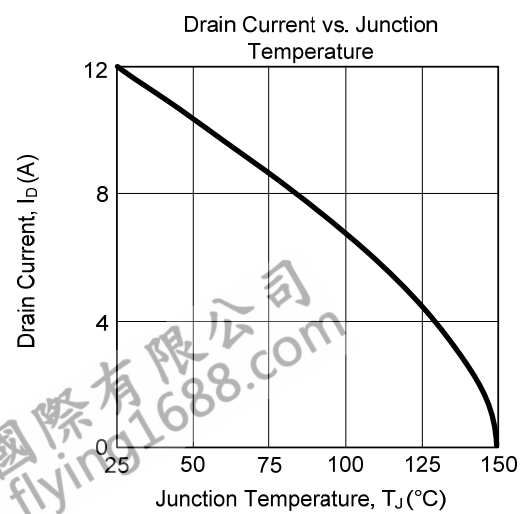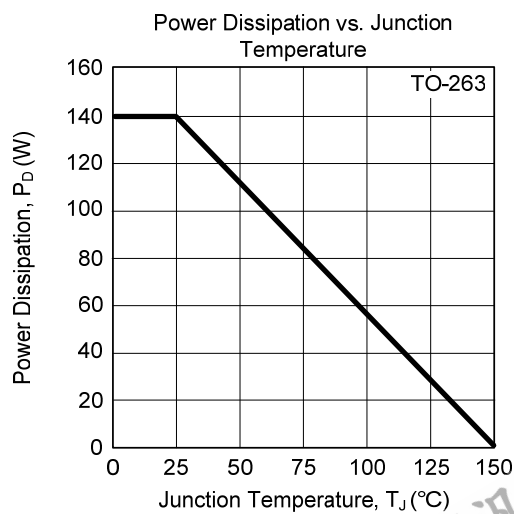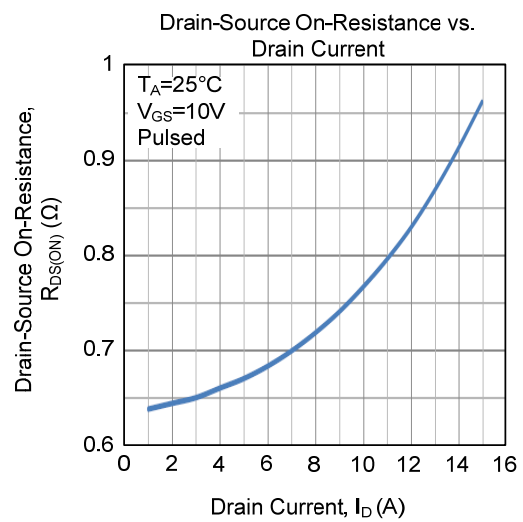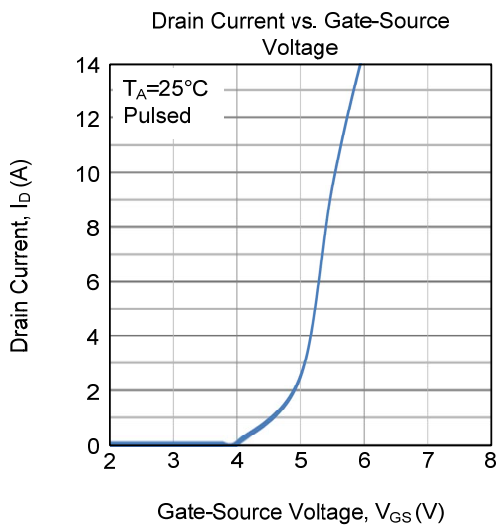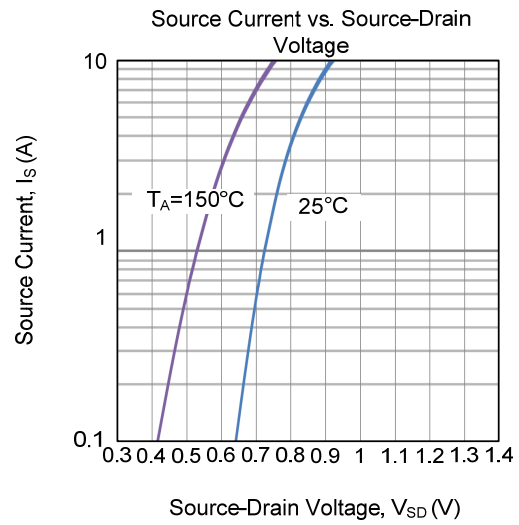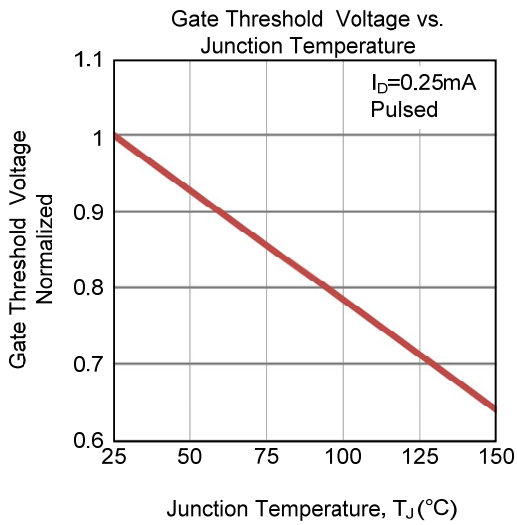

■ TYPICAL CHARACTERISTICS (Cont.)

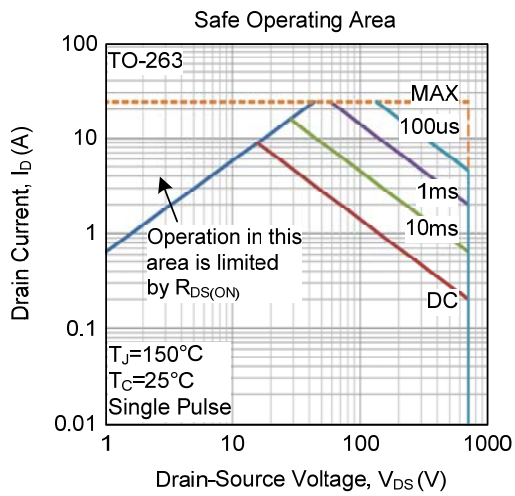

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.