



# 2SB1260

## PNP SILICON TRANSISTOR


### POWER TRANSISTOR

■ DESCRIPTION

The UTC **2SB1260** is a epitaxial planar type PNP silicon transistor.

■ FEATURES

- \* High breakdown voltage and high current.  
 $BV_{CEO} = -80V, I_C = -1A$
- \* Good  $h_{FE}$  linearity.
- \* Low  $V_{CE(SAT)}$

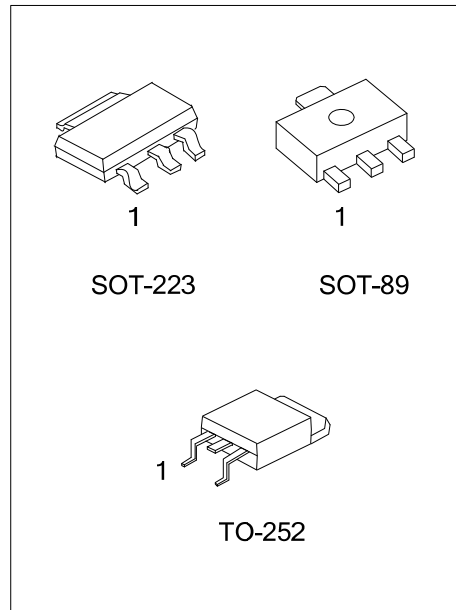

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
2SB1260L-x-AA3-R	2SB1260G-x-AA3-R	SOT-223	B	C	E	Tape Reel
2SB1260L-x-AB3-R	2SB1260G-x-AB3-R	SOT-89	B	C	E	Tape Reel
2SB1260L-x-TN3-R	2SB1260G-x-TN3-R	TO-252	B	C	E	Tape Reel

Note: Pin Assignment: B: Base C: Collector E: Emitter

<p>2SB1260G-x-AA3-R</p> <p>(1) Packing Type          (2) Package Type          (3) Rank          (4) Green Package</p>	<p>(1) R: Tape Reel          (2) AA3: SOT-223, AB3: SOT-89, TN3: TO-252          (3) refer to Classification of <math>h_{FE}</math>          (4) G: Halogen Free and Lead Free, L: Lead Free</p>
--	--

■ MARKING

Packing	Marking
SOT-223	<p>2SB1260 □          □□□□          1</p> <p>L: Lead Free          G: Halogen Free          Data Code</p>
SOT-89	<p>□□□□          2SB1260 □          □ □ □</p> <p>Date Code          L: Lead Free          G: Halogen Free</p>
TO-252	<p>UTC          2SB1260 □          □□□□□□          1</p> <p>Lot Code          L: Lead Free          G: Halogen Free          Data Code</p>

■ ABSOLUTE MAXIMUM RATINGS (  $T_A=25^{\circ}\text{C}$ , unless otherwise specified )

PARAMETER	SYMBOL	RATINGS	UNIT
Collector -Base Voltage	$V_{CB0}$	-80	V
Collector -Emitter Voltage	$V_{CE0}$	-80	V
Emitter -Base Voltage	$V_{EB0}$	-5	V
Peak Collector Current (single pulse, $P_w=100\text{ms}$ )	$I_{CM}$	-2	A
DC Collector Current	$I_C$	-1	A
Power Dissipation	SOT-223	1	W
	SOT-89	0.5	W
	TO-252	1.9	W
Junction Temperature	$T_J$	+150	$^{\circ}\text{C}$
Storage Temperature	$T_{STG}$	-40 ~ +150	$^{\circ}\text{C}$

Note 1. Printed circuit board, 1.7mm thick, collector copper plating 100mm<sup>2</sup> or larger.

2. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (  $T_A=25^{\circ}\text{C}$ , unless otherwise specified )







PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector Base Breakdown Voltage	$BV_{CB0}$	$I_C = -50\mu\text{A}$	-80			V
Collector Emitter Breakdown Voltage	$BV_{CE0}$	$I_C = -1\text{mA}$	-80			V
Emitter Base Breakdown Voltage	$BV_{EB0}$	$I_E = -50\mu\text{A}$	-5			V
Collector Cut-Off Current	$I_{CB0}$	$V_{CB} = -60\text{V}$			-1	$\mu\text{A}$
Emitter Cut-Off Current	$I_{EB0}$	$V_{EB} = -4\text{V}$			-1	$\mu\text{A}$
DC Current Gain(Note 1)	$h_{FE}$	$V_{CE} = -3\text{V}$ , $I_{OUT} = -0.1\text{A}$	82		390	
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C = -500\text{mA}$ , $I_B = -50\text{mA}$			-0.4	V
Transition Frequency	$f_T$	$V_{CE} = -5\text{V}$ , $I_E = 50\text{mA}$ , $f = 30\text{MHz}$		100		MHz
Output Capacitance	$C_{ob}$	$V_{CB} = -10\text{V}$ , $I_E = 0$ , $f = 1\text{MHz}$		25		pF

Note 1: Pulse test:  $P_w < 300\mu\text{s}$ , Duty Cycle  $< 2\%$



■ CLASSIFICATION OF  $h_{FE}$

RANK	P	Q	R
RANGE	82 ~ 180	120 ~ 270	180 ~ 390

## TYPICAL CHARACTERISTICS

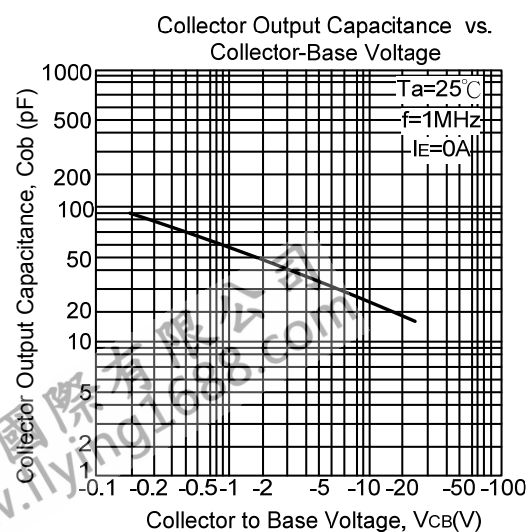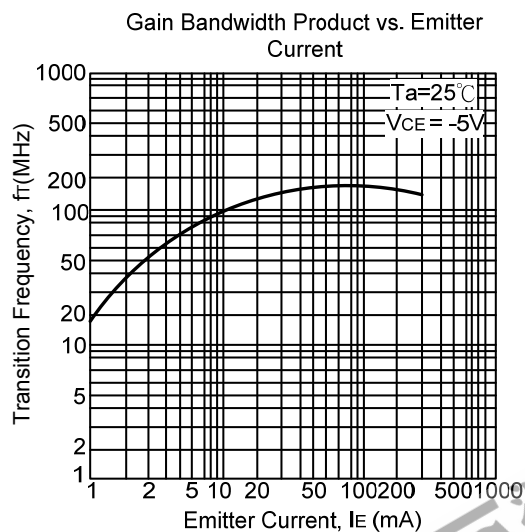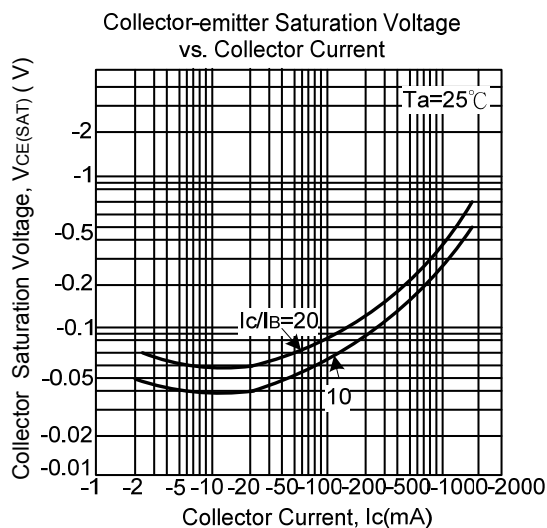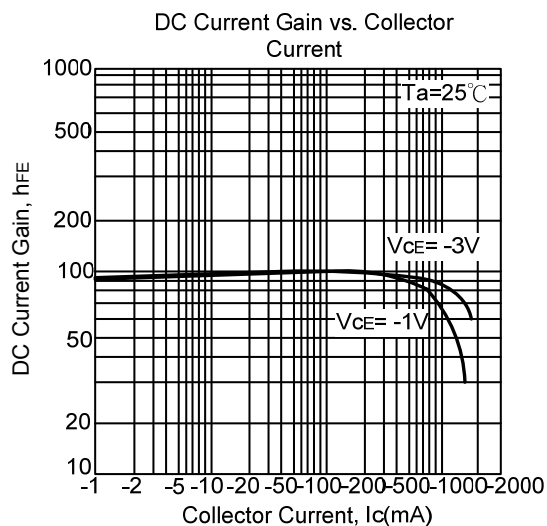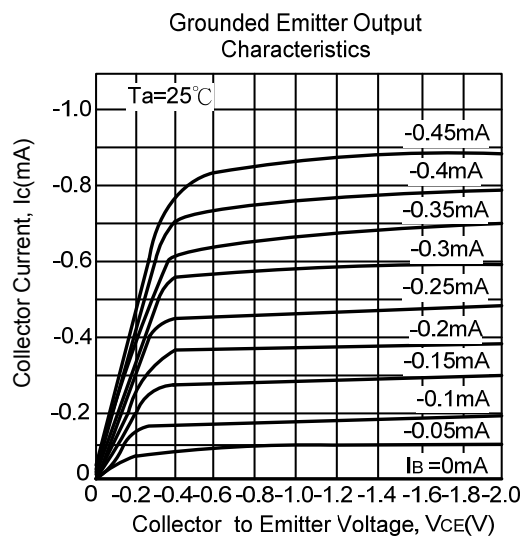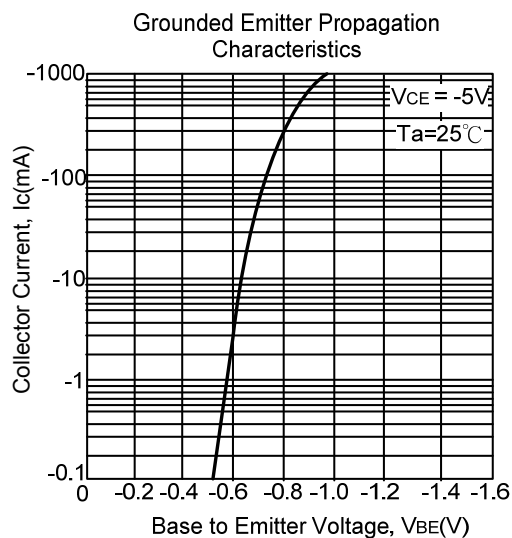

■ TYPICAL CHARACTERISTICS(Cont.)

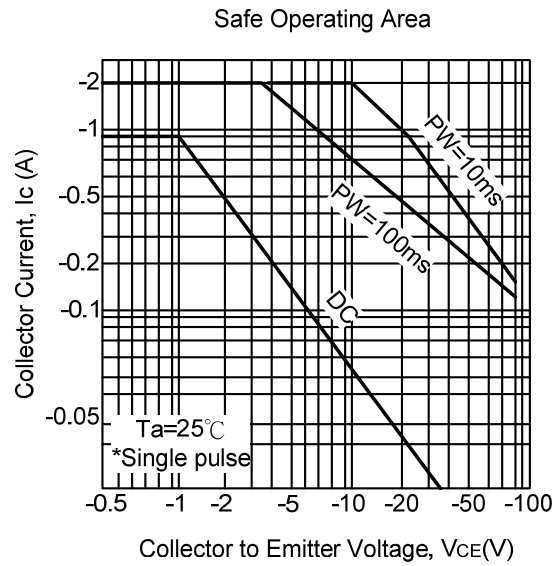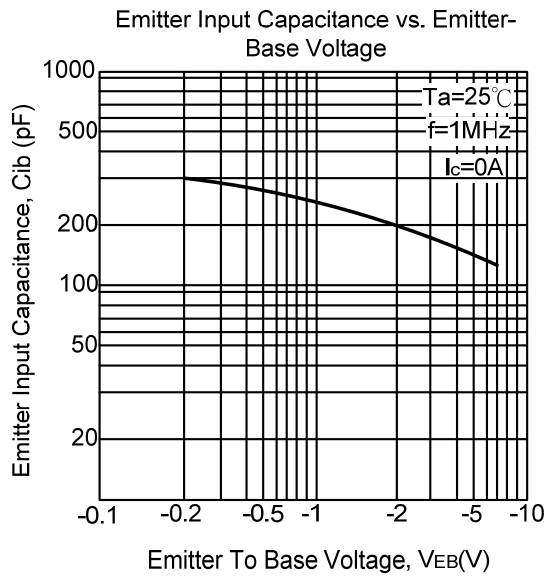

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.