




2SC4774

NPN SILICON TRANSISTOR

HIGH FREQUENCY AMPLIFIER
TRANSISTOR, RF SWITCHING
(6V, 50mA)

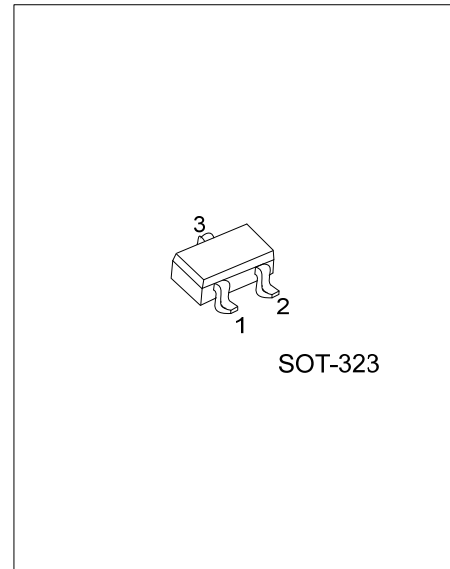

FEATURES

- * Very low output-on resistance (R_{ON})
- * Low capacitance


ORDERING INFORMATION

Order Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
2SC4774L-AL3-R	2SC4774G-AL3-R	SOT-323	B	E	C	Tape Reel

Note: Pin Assignment: B: Base E: Emitter C: Collector

<p>2SC4774G-AL3-R</p> <p>(1) Packing Type (2) Package Type (3) Green Package</p>	<p>(1) R: Tape Reel (2) AL3: SOT-323 (3) G: Halogen Free and Lead Free, L: Lead Free</p>
--	--

MARKING



■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Collector-Base Voltage	V_{CBO}	12	V
Collector-Emitter Voltage	V_{CEO}	6	V
Emitter-Base Voltage	V_{EBO}	3	V
Collector Current	I_C	50	mA
Collector Power Dissipation	P_D	0.2	W
Junction Temperature	T_J	+150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-40 ~ +150	$^\circ\text{C}$


Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL SPECIFICATIONS ($T_A=25^\circ\text{C}$, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	BV_{CBO}	$I_C = 10\mu\text{A}$	12			V
Collector-Emitter Breakdown Voltage	BV_{CEO}	$I_C = 1\text{mA}$	6			V
Emitter-Base Breakdown Voltage	BV_{EBO}	$I_E = 10\mu\text{A}$	3			V
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C/I_B = 10\text{mA}/1\text{mA}$			0.3	V
Collector Cutoff Current	I_{CBO}	$V_{CB} = 10\text{V}$			0.5	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 2\text{V}$			0.5	μA
DC Current Transfer Ratio	h_{FE}	$V_{CE}/I_C = 5\text{V}/5\text{mA}$	270		560	
Transition Frequency	f_T	$V_{CE} = 5\text{V}$, $I_E = -10\text{mA}$, $f = 200\text{MHz}$	300	800		MHz
Output Capacitance	C_{ob}	$V_{CB} = 10\text{V}$, $I_E = 0\text{A}$, $f = 1\text{MHz}$		1	1.7	pF
Output-On Resistance	R_{ON}	$I_B = 3\text{mA}$, $V_{IN} = 100\text{mVrms}$, $f = 500\text{kHz}$		2		Ω

TYPICAL CHARACTERISTIC


Grounded Emitter Output Characteristics (I)

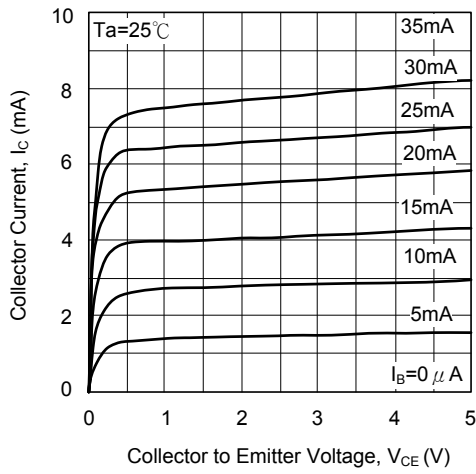


Grounded Emitter Output Characteristics (II)

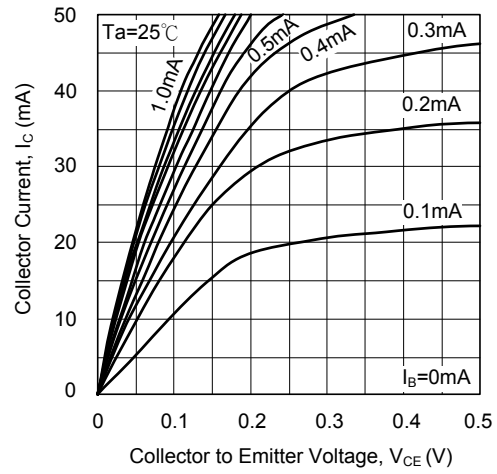


Grounded Emitter Propagation Characteristics

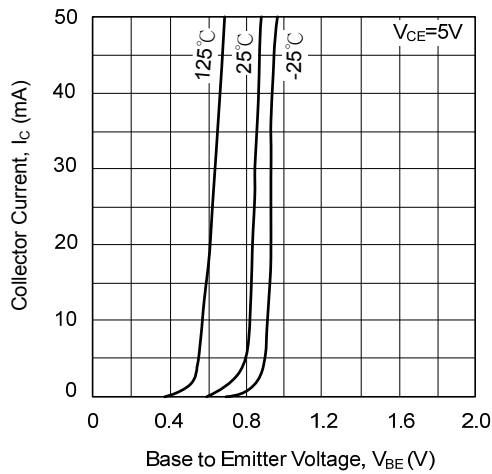


DC Current Gain vs. Collector Current

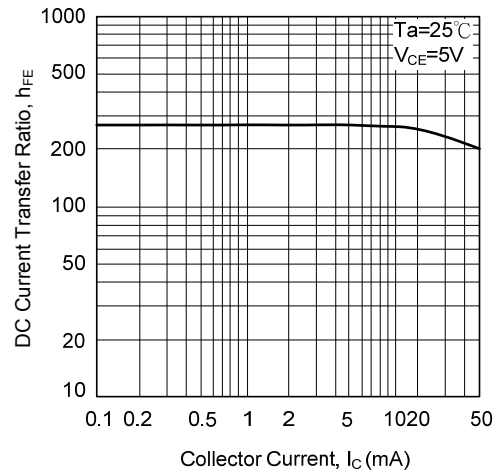




Collector-Emitter Saturation Voltage vs. Collector Current

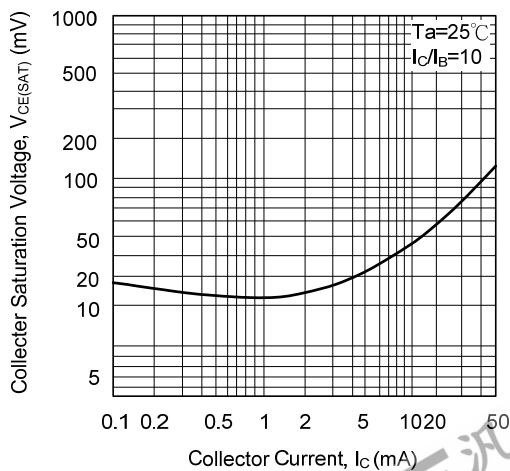

Gain Bandwidth Product vs. Collector Current

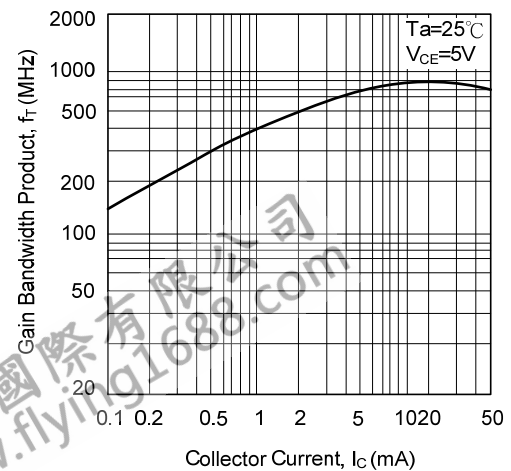

■ TYPICAL CHARACTERISTIC (Cont.)

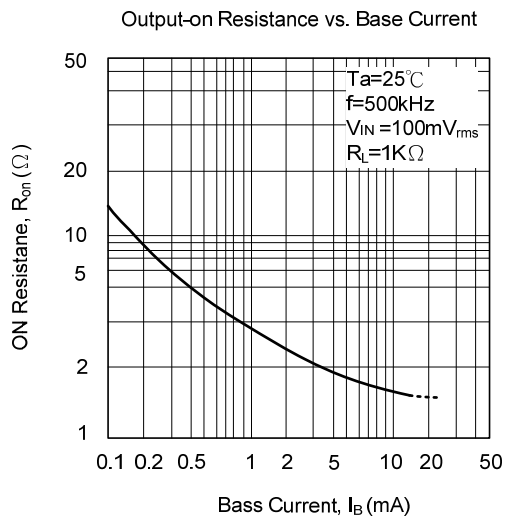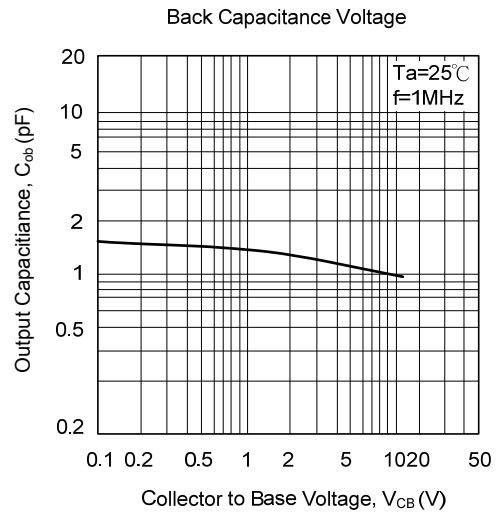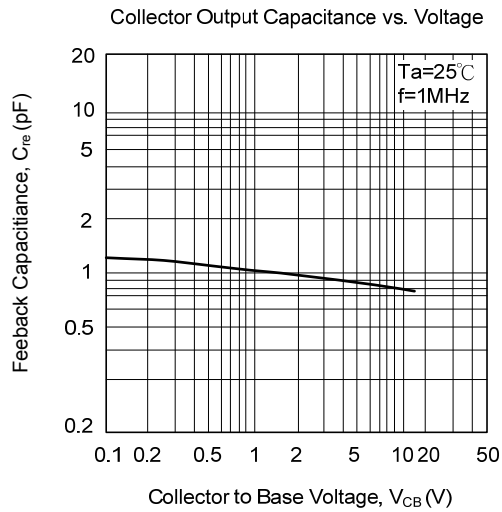

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.