


4N55-TC3**Power MOSFET****4A, 550V N-CHANNEL
POWER MOSFET****■ DESCRIPTION**


The UTC 4N55-TC3 is a high voltage power MOSFET and is designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and have a high rugged avalanche characteristics. This power MOSFET is usually used at high speed switching applications in power supplies, PWM motor controls, high efficient AC to DC converters and bridge circuits.



TO-252


■ FEATURES* $R_{DS(ON)} \leq 2.9\Omega$ @ $V_{GS}=10V$, $I_D=2.5A$


* High Switching Speed

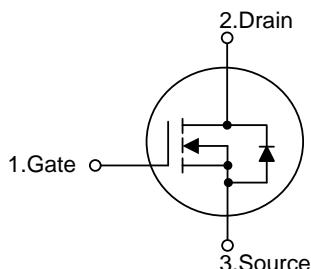■ SYMBOL**■ ORDERING INFORMATION**

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
4N55L-TN3-R	4N55G-TN3-R	TO-252	G	D	S	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

4N55G-TN3-R 	(1) Packing Type (2) Package Type (3) Green Package (1) R: Tape Reel (2) TN3: TO-252 (3) G: Halogen Free and Lead Free, L: Lead Free
--	---

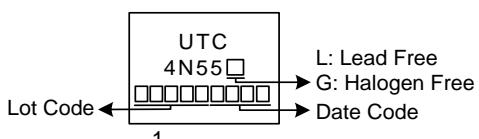■ MARKING

■ ABSOLUTE MAXIMUM RATINGS ($T_c=25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	550	V
Gate-Source Voltage		V_{GSS}	± 30	V
Drain Current ($T_c=25^\circ\text{C}$)	Continuous	I_D	4	A
	Pulsed (Note 2)	I_{DM}	8	A
Avalanche Energy (Note 3)	Single Pulsed	E_{AS}	44	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	2.2	V/ns
Power Dissipation		P_D	50	W
Junction Temperature		T_J	+150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature.

3. $L=20\text{mH}$, $I_{AS}=2.1\text{A}$, $V_{DD}=50\text{V}$, $R_G=25\Omega$, Starting $T_J=25^\circ\text{C}$.

4. $I_{SD}\leq 4.0\text{A}$, $di/dt\leq 200\text{A}/\mu\text{s}$, $V_{DD}\leq BV_{DSS}$, Starting $T_J=25^\circ\text{C}$.

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient		θ_{JA}	110	$^\circ\text{C}/\text{W}$
Junction to Case		θ_{JC}	2.5 (Note)	$^\circ\text{C}/\text{W}$

Note: Device mounted on FR-4 substrate PC board, 2oz copper, with 1inch square copper plate.

■ ELECTRICAL CHARACTERISTICS ($T_J=25^\circ\text{C}$, unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	$I_D=250\mu\text{A}$, $V_{GS}=0\text{V}$	550			V
Drain-Source Leakage Current	I_{DSS}	$V_{DS}=550\text{V}$, $V_{GS}=0\text{V}$		10		μA
Gate- Source Leakage Current	Forward	$V_{GS}=+30\text{V}$, $V_{DS}=0\text{V}$			+100	nA
	Reverse	$V_{GS}=-30\text{V}$, $V_{DS}=0\text{V}$			-100	nA
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{DS}=V_{GS}$, $I_D=250\mu\text{A}$	2.0	4.0		V
Static Drain-Source On-State Resistance	$R_{DS(ON)}$	$V_{GS}=10\text{V}$, $I_D=2.0\text{A}$		2.9		Ω
DYNAMIC PARAMETERS						
Input Capacitance	C_{iss}	$V_{GS}=0\text{V}$, $V_{DS}=25\text{V}$, $f=1.0\text{MHz}$		307		pF
Output Capacitance	C_{oss}			43		pF
Reverse Transfer Capacitance	C_{rss}			4		pF
SWITCHING PARAMETERS						
Total Gate Charge (Note 1)	Q_G	$V_{DS}=440\text{V}$, $V_{GS}=10\text{V}$, $I_D=4.0\text{A}$, $I_G=1\text{mA}$ (Note 1, 2)		8.5		nC
Gate to Source Charge	Q_{GS}			2.8		nC
Gate to Drain Charge	Q_{GD}			1.4		nC
Turn-ON Delay Time (Note 1)	$t_{D(ON)}$	$V_{DD}=100\text{V}$, $V_{GS}=10\text{V}$, $I_D=4.0\text{A}$, $R_G=25\Omega$ (Note 1, 2)		5		ns
Rise Time	t_R			15		ns
Turn-OFF Delay Time	$t_{D(OFF)}$			28		ns
Fall-Time	t_F			24		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Maximum Body-Diode Continuous Current	I_S			4		A
Maximum Body-Diode Pulsed Current	I_{SM}			8		A
Drain-Source Diode Forward Voltage (Note 1)	V_{SD}	$I_S=4.0\text{A}$, $V_{GS}=0\text{V}$		1.4		V
Reverse Recovery Time (Note 1)	t_{rr}	$I_S=4.0\text{A}$, $V_{GS}=0\text{V}$, $di/dt = 100\text{A}/\mu\text{s}$		304		ns
Reverse Recovery Charge	Q_{rr}			1.4		μC

Notes: 1. Pulse Test: Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$.


2. Essentially independent of operating temperature.




UNISONIC TECHNOLOGIES CO., LTD

www.unisonic.com.tw

■ TEST CIRCUITS AND WAVEFORMS

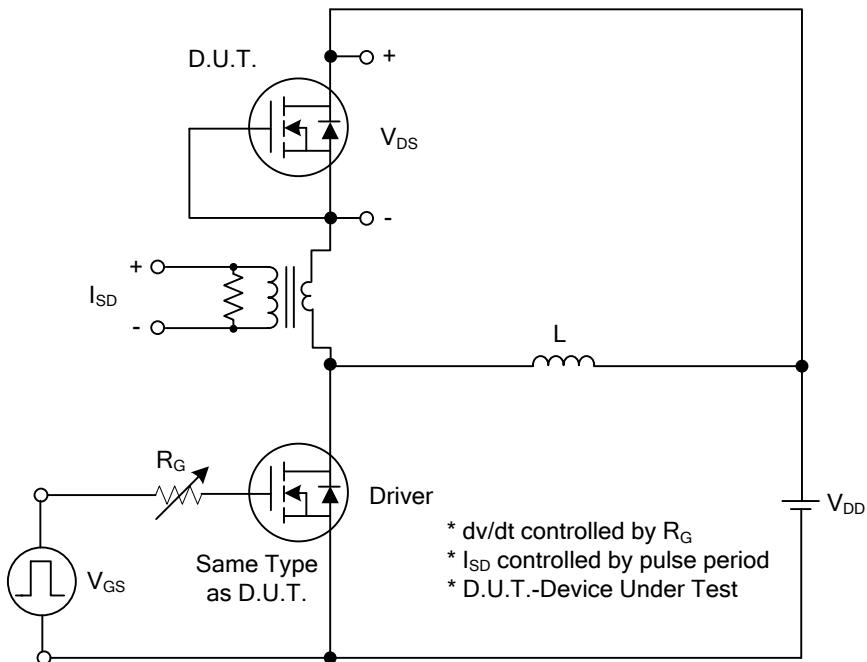


Peak Diode Recovery dv/dt Test Circuit

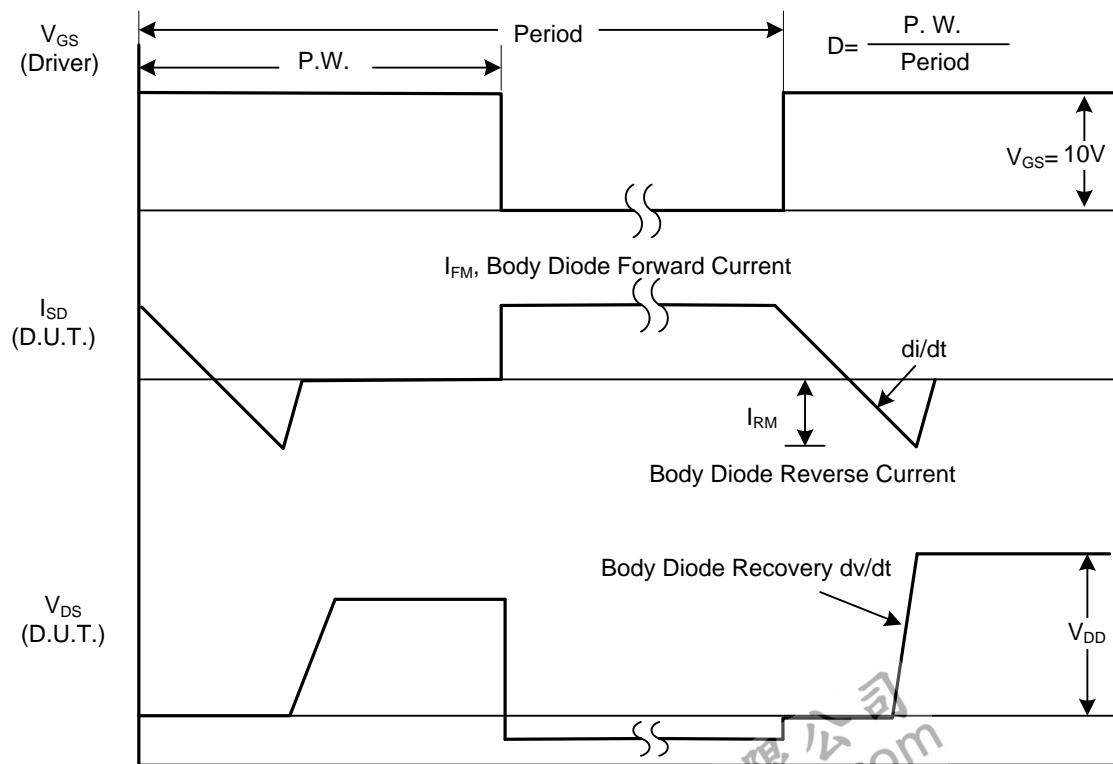


Peak Diode Recovery dv/dt Waveforms


■ TEST CIRCUITS AND WAVEFORMS

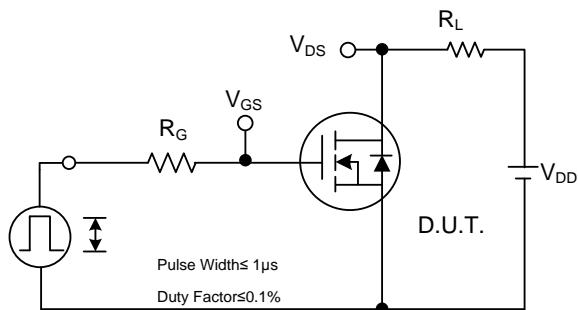


Switching Test Circuit

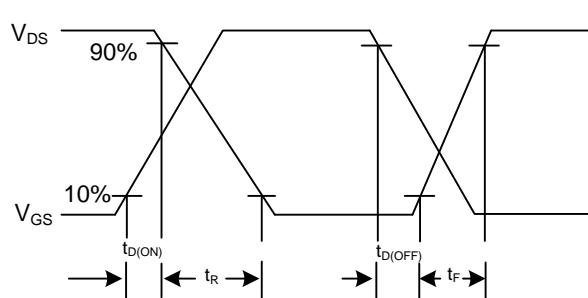


Switching Waveforms

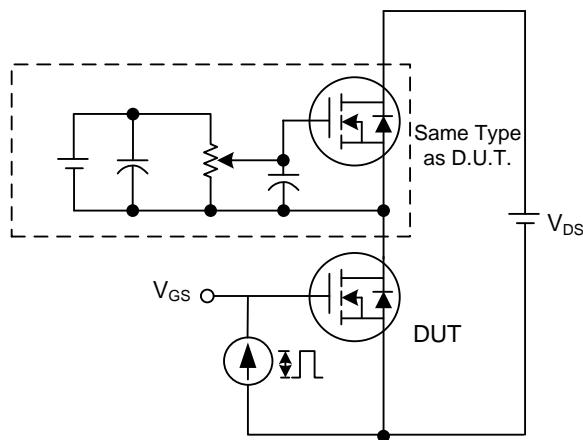


Gate Charge Test Circuit

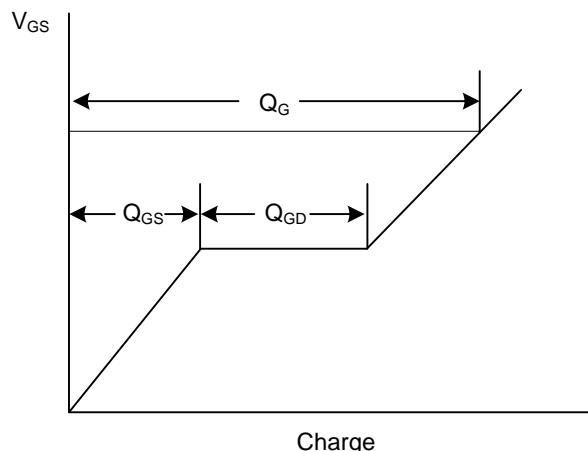

Gate Charge Waveform






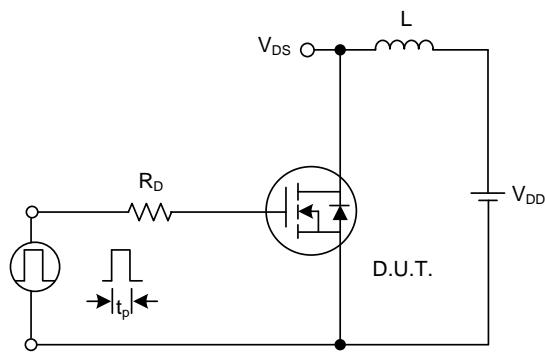


Unclamped Inductive Switching Test Circuit






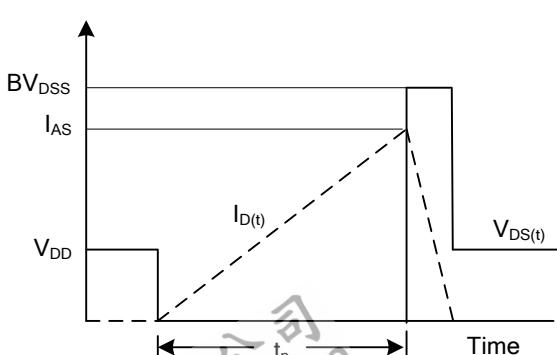



Unclamped Inductive Switching Waveforms

■ TYPICAL CHARACTERISTICS

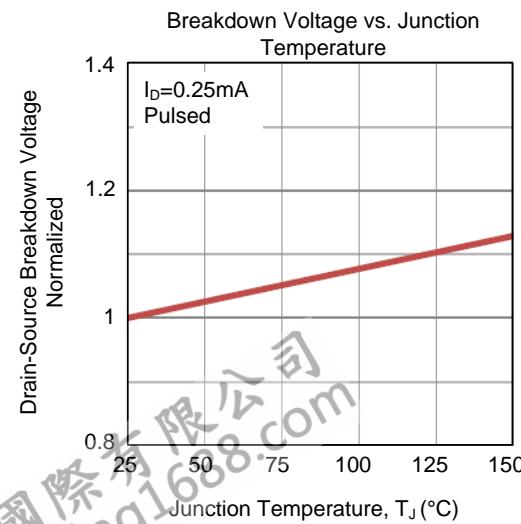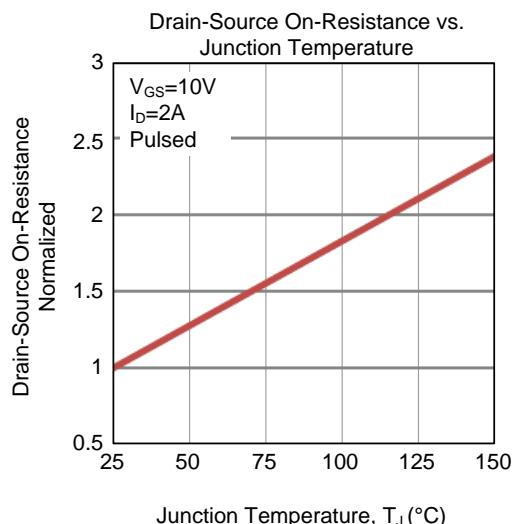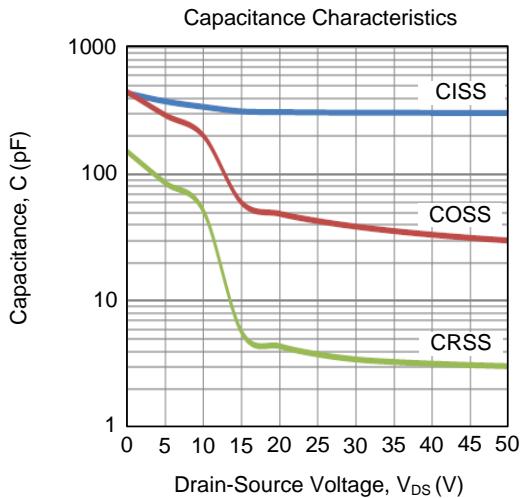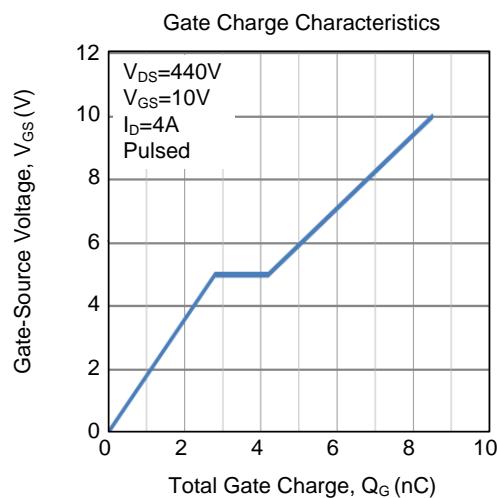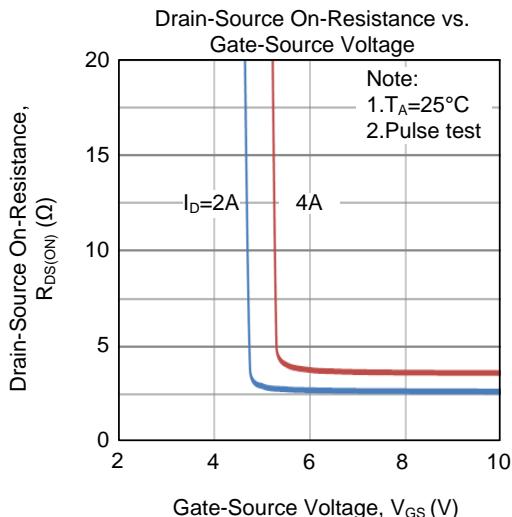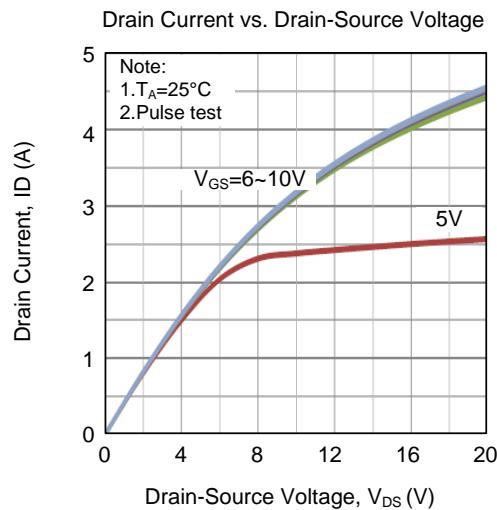

■ TYPICAL CHARACTERISTICS (Cont.)

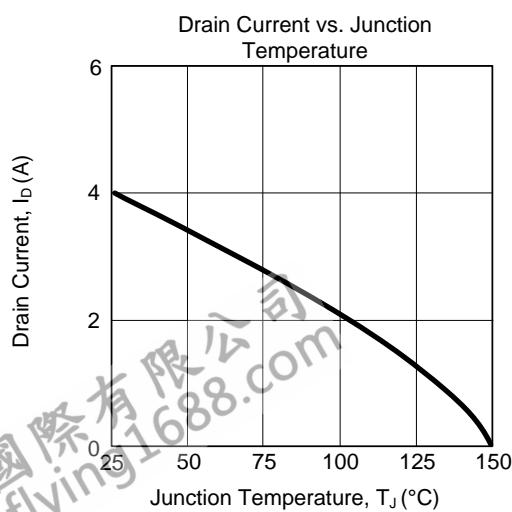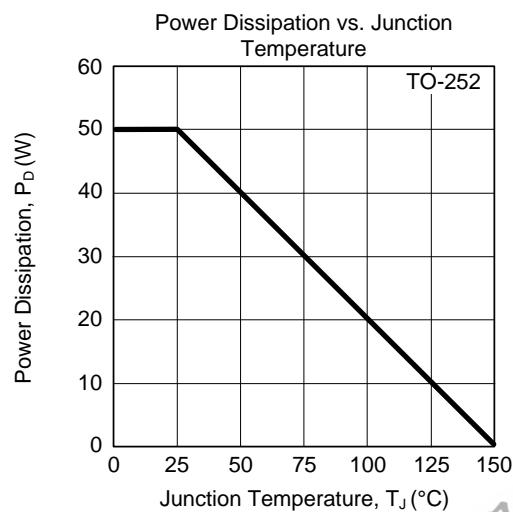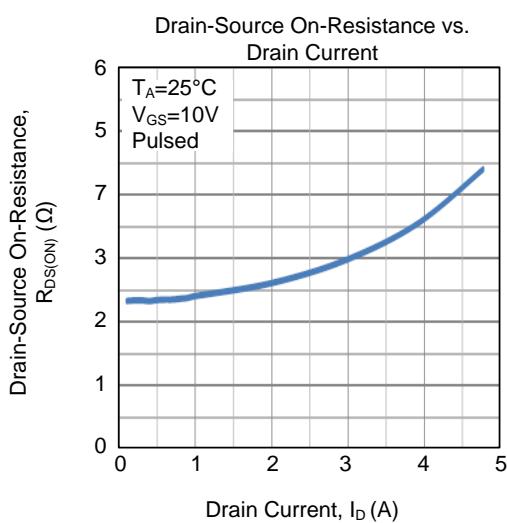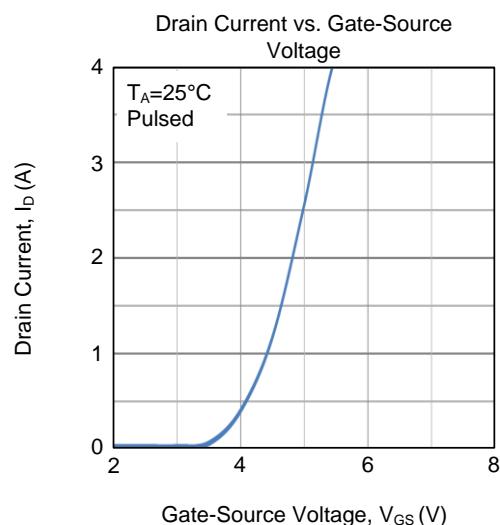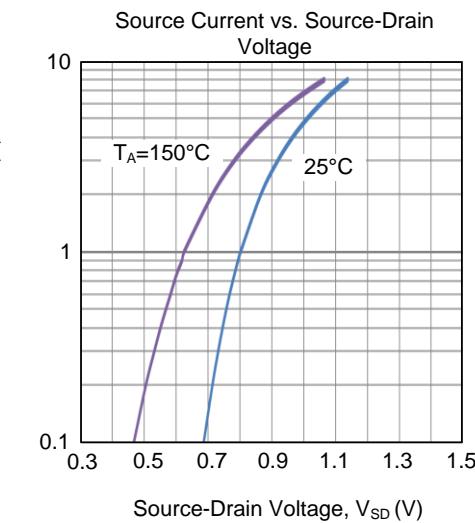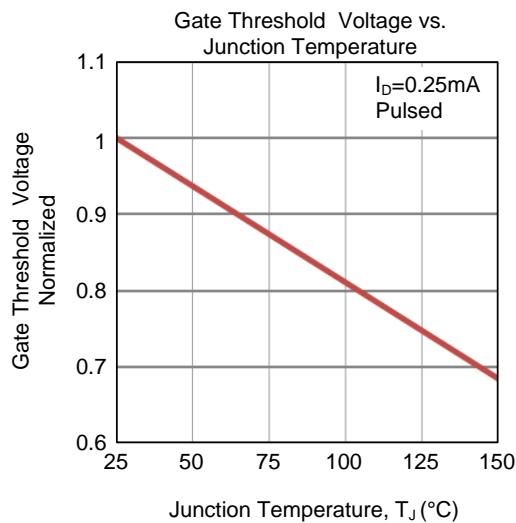

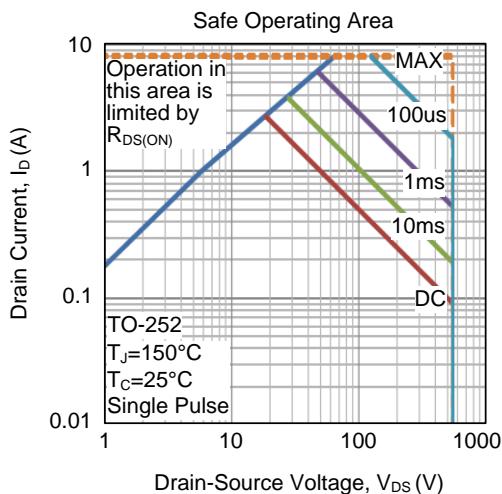■ TYPICAL CHARACTERISTICS (Cont.)

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.