

4N60K-MTQ

Preliminary

Power MOSFET

4.0A, 600V N-CHANNEL POWER MOSFET



■ DESCRIPTION

The UTC **4N60K-MTQ** is a high voltage power MOSFET and is designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and have a high rugged avalanche characteristics. This power MOSFET is usually used at high speed switching applications in power supplies, PWM motor controls, high efficient DC to DC converters and bridge circuits.

■ FEATURES

- * $R_{DS(ON)} < 2.5\Omega$ @ $V_{GS} = 10$ V, $I_D = 2.2$ A
- * Fast Switching Capability
- * Avalanche Energy Specified
- * Improved dv/dt Capability, high Ruggedness


■ SYMBOL

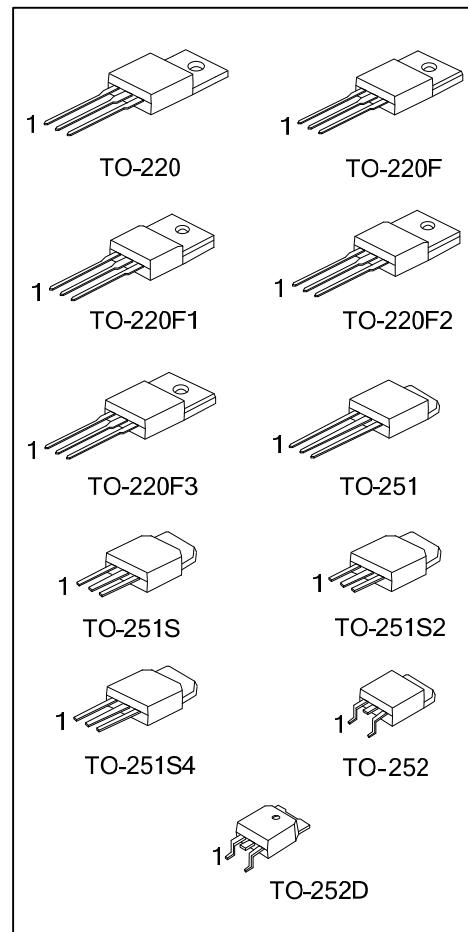


■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
4N60KL-TA3-T	4N60KG-TA3-T	TO-220	G	D	S	Tube
4N60KL-TF3-T	4N60KG-TF3-T	TO-220F	G	D	S	Tube
4N60KL-TF1-T	4N60KG-TF1-T	TO-220F1	G	D	S	Tube
4N60KL-TF2-T	4N60KG-TF2-T	TO-220F2	G	D	S	Tube
4N60KL-TF3T-T	4N60KG-TF3T-T	TO-220F3	G	D	S	Tube
4N60KL-TM3-T	4N60KG-TM3-T	TO-251	G	D	S	Tube
4N60KL-TMS-T	4N60KG-TMS-T	TO-251S	G	D	S	Tube
4N60KL-TMS2-T	4N60KG-TMS2-T	TO-251S2	G	D	S	Tube
4N60KL-TMS4-T	4N60KG-TMS4-T	TO-251S4	G	D	S	Tube
4N60KL-TN3-R	4N60KG-TN3-R	TO-252	G	D	S	Tape Reel
4N60KL-TND-R	4N60KG-TND-R	TO-252D	G	D	S	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

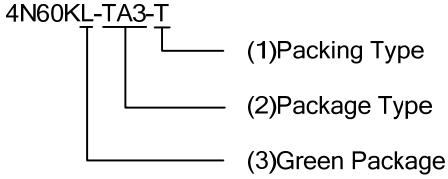 4N60KL-TA3-T	(1) T: Tube, R: Tape Reel (2) TA3: TO-220, TF3: TO-220F, TF1: TO-220F1, TF2: TO-220F2, TF3T: TO-220F3, TM3: TO-251 TMS: TO-251S, TMS2: TO-251S2, TMS4: TO-251S4, TN3: TO-252, TND: TO-252D (3) L: Lead Free, G: Halogen Free and Lead Free
---	---

■ MARKING

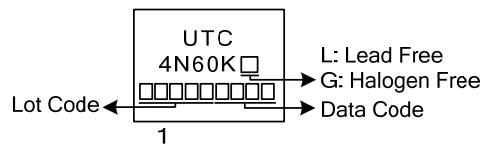

■ ABSOLUTE MAXIMUM RATINGS ($T_c = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	600	V
Gate-Source Voltage		V_{GSS}	± 30	V
Drain Current	Continuous	I_D	4.0	A
	Pulsed (Note 2)	I_{DM}	16	A
Avalanche Energy	Single Pulsed (Note 3)	E_{AS}	133	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	3.74	V/ns
Power Dissipation	TO-220	P_D	106	W
	TO-220F/TO-220F1		36	
	TO-220F2/TO-220F3			
	TO-251/TO-251S			
	TO-251S2/TO-251S4		50	
	TO-252/TO-252D			
Junction Temperature	T_J		+150	°C
Operating Temperature	T_{OPR}		-55 ~ +150	°C
Storage Temperature	T_{STG}		-55 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating : Pulse width limited by maximum junction temperature

3. L = 26mH, $I_{AS} = 3.2\text{A}$, $V_{DD} = 50\text{V}$, $R_G = 25 \Omega$, Starting $T_J = 25^\circ\text{C}$

4. $I_{SD} \leq 4.0\text{A}$, $dI/dt \leq 200\text{A}/\mu\text{s}$, $V_{DD} \leq BV_{DSS}$, Starting $T_J = 25^\circ\text{C}$

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-220/TO-220F TO-220F1/TO-220F2 TO-220F3	θ_{JA}	62.5	°C/W
	TO-251/TO-251S TO-251S2/TO-251S4 TO-252/TO-252D		110	°C/W
Junction to Case	TO-220	θ_{JC}	1.18	°C/W
	TO-220F/TO-220F1 TO-220F3		3.47	°C/W
	TO-220F2		3.4	°C/W
	TO-251/TO-251S TO-251S2/TO-251S4		2.50	°C/W
	TO-252/TO-252D			


■ ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	600			V
Drain-Source Leakage Current	I_{DSS}	$V_{\text{DS}}=600\text{V}, V_{\text{GS}}=0\text{V}$		10		μA
		$V_{\text{DS}}=600\text{V}, V_{\text{GS}}=0\text{V}, T_C=125^\circ\text{C}$		10		μA
Gate-Source Leakage Current	I_{GSS}	$V_{\text{GS}}=30\text{V}, V_{\text{DS}}=0\text{V}$		100		nA
		$V_{\text{GS}}=-30\text{V}, V_{\text{DS}}=0\text{V}$		-100		nA
Breakdown Voltage Temperature Coefficient	$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	$I_{\text{D}}=250\mu\text{A}$, Referenced to 25°C		0.6		V°C
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{\text{GS(TH)}}$	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	2.0		4.5	V
Static Drain-Source On-State Resistance	$R_{\text{DS(ON)}}$	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=2.2\text{A}$			3.5	Ω
DYNAMIC CHARACTERISTICS						
Input Capacitance	C_{ISS}	$V_{\text{DS}}=25\text{V}, V_{\text{GS}}=0\text{V}, f=1\text{MHz}$		350		pF
Output Capacitance	C_{OSS}			260		pF
Reverse Transfer Capacitance	C_{RSS}			56		pF
SWITCHING CHARACTERISTICS						
Total Gate Charge	Q_G	$V_{\text{DS}}=50\text{V}, V_{\text{GS}}=10\text{V}, I_{\text{D}}=1.3\text{A}, I_G=100\mu\text{A}$ (Note 1, 2)		37		nC
Gate-Source Charge	Q_{GS}			4.8		nC
Gate-Drain Charge	Q_{GD}			5.8		nC
Turn-On Delay Time	$t_{\text{D(ON)}}$	$V_{\text{DD}}=30\text{V}, V_{\text{GS}}=10\text{V}, I_{\text{D}}=0.5\text{A}, R_G=25\Omega$ (Note 1, 2)		50		ns
Turn-On Rise Time	t_R			33		ns
Turn-Off Delay Time	$t_{\text{D(OFF)}}$			74		ns
Turn-Off Fall Time	t_F			27		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Maximum Continuous Drain-Source Diode Forward Current	I_S				4.0	A
Maximum Pulsed Drain-Source Diode Forward Current	I_{SM}				17.6	A
Drain-Source Diode Forward Voltage	V_{SD}	$V_{\text{GS}} = 0\text{V}, I_S = 4.0\text{A}$			1.4	V
Reverse Recovery Time	t_{rr}	$I_S=4.0\text{A}, V_{\text{GS}}=0\text{V}, dI_F/dt=100\text{A}/\mu\text{s}$ (Note 1)		470		ns
Reverse Recovery Charge	Q_{RR}			2.2		μC


Notes: 1. Pulse Test: Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$

2. Essentially independent of operating temperature

■ TEST CIRCUITS AND WAVEFORMS

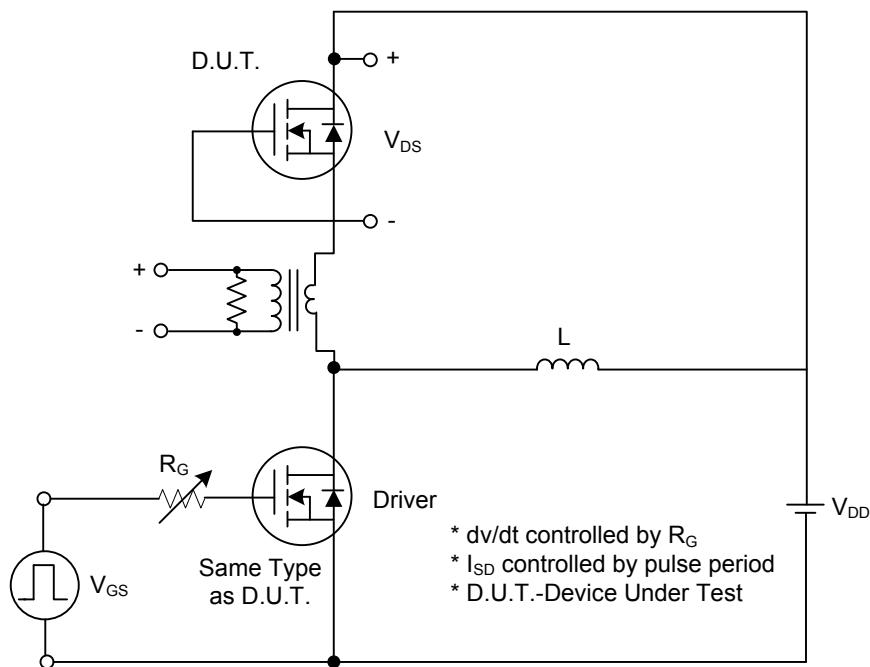


Peak Diode Recovery dv/dt Test Circuit

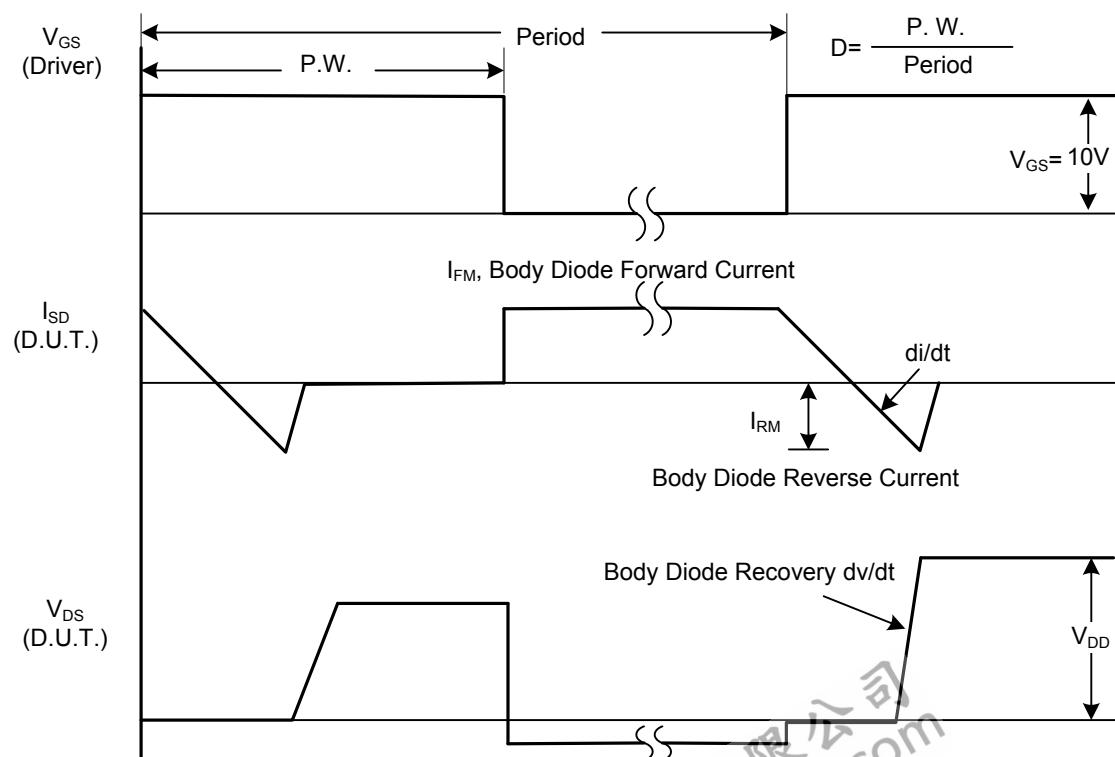


Peak Diode Recovery dv/dt Waveforms


■ TEST CIRCUITS AND WAVEFORMS (Cont.)

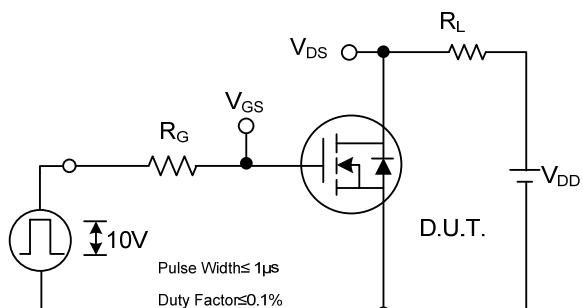


Switching Test Circuit

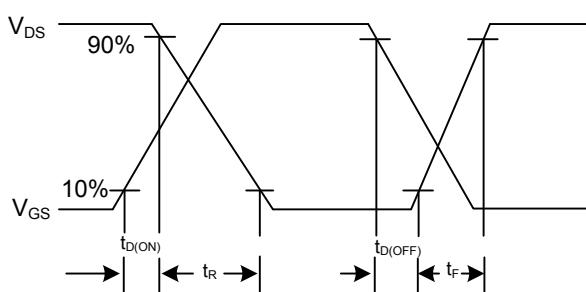


Switching Waveforms

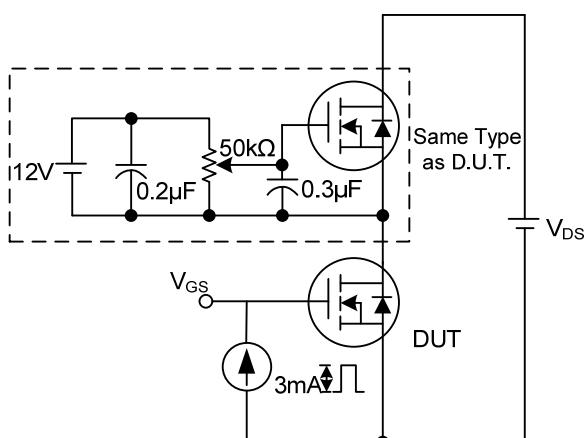


Gate Charge Test Circuit

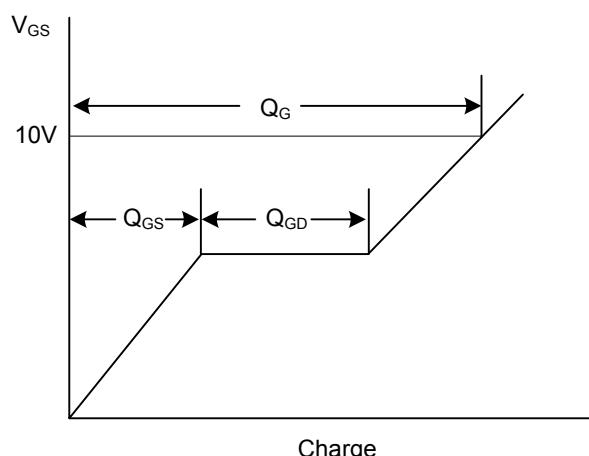

Gate Charge Waveform

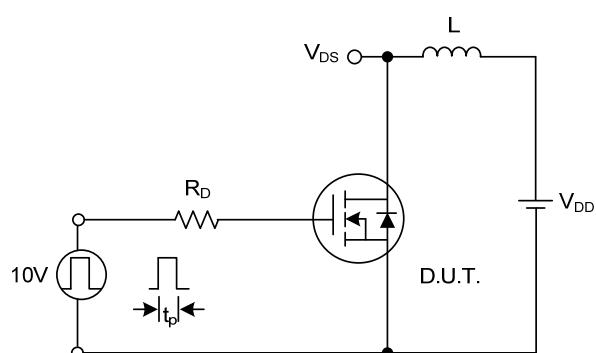

Unclamped Inductive Switching Test Circuit

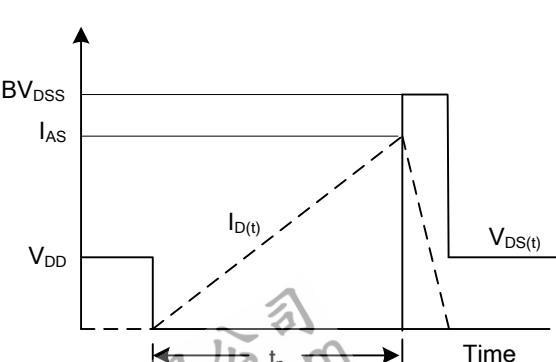

Unclamped Inductive Switching Waveforms

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.