

6N70-C

Preliminary

Power MOSFET

6.0A, 700V N-CHANNEL
POWER MOSFET

■ DESCRIPTION

The UTC **6N70-C** is an N-channel mode power MOSFET using UTC's advanced technology to provide customers with a minimum on-state resistance, high switching speed, low gate charge and low input capacitance.


The UTC **6N70-C** is universally applied in high efficiency switch mode power supply.

■ FEATURES

* $R_{DS(ON)} < 1.8\Omega$ @ $V_{GS} = 10V$, $I_D = 3A$

* High switching speed

■ SYMBOL

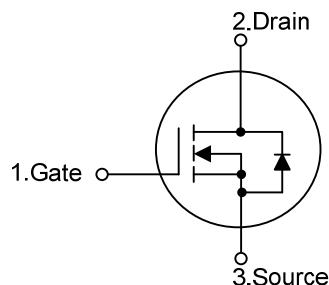


■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
6N70L-TF3-T	6N70G-TF3-T	TO-220F	G	D	S	Tube
6N70L-TF2-T	6N70G-TF2-T	TO-220F2	G	D	S	Tube
6N70L-TM3-T	6N70G-TM3-T	TO-251	G	D	S	Tube
6N70L-TMS-T	6N70G-TMS-T	TO-251S	G	D	S	Tube
6N70L-TMS2-T	6N70G-TMS2-T	TO-251S2	G	D	S	Tube
6N70L-TMS4-T	6N70G-TMS4-T	TO-251S4	G	D	S	Tube

Note: Pin Assignment: G: Gate D: Drain S: Source

 6N70L-TF3-T	(1)Packing Type (2)Package Type (3)Green Package	(1) T: Tube (2) TF3: TO-220F, TF2: TO-220F2, TM3: TO-251 TMS: TO-251S, TMS2: TO-251S2, TMS4: TO-251S4 (3) L: Lead Free, G: Halogen Free and Lead Free
-----------------	--	---

■ MARKING

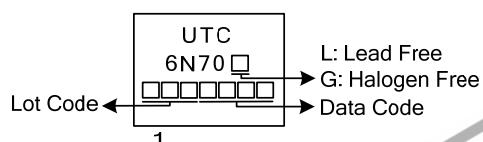

■ ABSOLUTE MAXIMUM RATINGS (unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V _{DSS}	700	V
Gate-Source Voltage (Note 2)		V _{GSS}	±30	V
Drain Current	Continuous T _C =25°C	I _D	6	A
			3.8	A
	Pulsed T _C =100°C	I _{DM}	24	A
Avalanche Current (Note 2)		I _{AR}	6	A
Avalanche Energy	Single Pulsed (Note 3)	E _{AS}	108	mJ
	Repetitive (Note 2)	E _{AR}	13	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	2.5	V/ns
Power Dissipation	TO-220F	P _D	40	W
	TO-220F2		42	
	TO-251/TO-251S		55	
	TO-251S2/TO-251S4			
Linear Derating Factor	TO-220F	P _D	0.32	W/°C
	TO-220F2		0.33	
	TO-251/TO-251S		0.44	
	TO-251S2/TO-251S4			
Junction Temperature	T _J		+150	°C
Storage Temperature	T _{STG}		-55~+150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature

3. L = 6mH, I_{AS} = 6A, V_{DD} = 50V, R_G = 27Ω, Starting T_J = 25°C

4. I_{SD} ≤ 6A, di/dt ≤ 140A/μs, V_{DD} ≤ BV_{DSS}, Starting T_J = 25°C

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-220F/TO-220F2	θ _{JA}	62.5	°C/W
	TO-251/TO-251S		110	°C/W
	TO-251S2/TO-251S4			
Junction to Case	TO-220F	θ _{JC}	3.1	°C/W
	TO-220F2		2.9	°C/W
	TO-251/TO-251S		2.27	°C/W
	TO-251S2/TO-251S4			

■ ELECTRICAL CHARACTERISTICS ($T_c=25^\circ\text{C}$, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	$I_D=250\mu\text{A}, V_{GS}=0\text{V}$	700			V
Breakdown Voltage Temperature Coefficient	$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	$I_D=250\mu\text{A}$		0.79		$\text{V}/^\circ\text{C}$
Drain-Source Leakage Current	I_{DSS}	$V_{DS}=700\text{V}$ $V_{DS}=560\text{V}, T_c=125^\circ\text{C}$		25	μA	
Gate-Source Leakage Current	Forward Reverse	I_{GSS} $V_{GS}=+30\text{V}, V_{DS}=0\text{V}$ $V_{GS}=-30\text{V}, V_{DS}=0\text{V}$		+100	nA	
				-100	nA	
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{GS(\text{TH})}$	$V_{DS}=V_{GS}, I_D=250\mu\text{A}, V_{DS}=5\text{V}$	2.0		4.0	V
Static Drain-Source On-State Resistance	$R_{\text{DS(ON)}}$	$V_{GS}=10\text{V}, I_D=3\text{A}$ (Note 1)		1.5	1.8	Ω
DYNAMIC PARAMETERS						
Input Capacitance	C_{ISS}	$V_{GS}=0\text{V}, V_{DS}=25\text{V}, f=1.0\text{MHz}$ (Note 1, 2)	700	1000		pF
Output Capacitance	C_{OSS}		79	120		pF
Reverse Transfer Capacitance	C_{RSS}		6	13		pF
SWITCHING PARAMETERS						
Turn-ON Delay Time	$t_{D(\text{ON})}$	$V_{DD}=30\text{V}, I_D=1\text{A}, R_G=25\Omega$	55	75		ns
Rise Time	t_R		50	70		ns
Turn-OFF Delay Time	$t_{D(\text{OFF})}$		180	210		ns
Fall-Time	t_F		50	70		ns
Total Gate Charge	Q_G	$V_{GS}=10\text{V}, V_{DS}=50\text{V}, I_D=1.3\text{A}$ (Note 1, 2)	25	40		nC
Gate to Source Charge	Q_{GS}		6.5			nC
Gate to Drain Charge	Q_{GD}		4.8			nC
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Maximum Body-Diode Continuous Current	I_S	Integral reverse pn-diode in the MOSFET		6		A
Maximum Body-Diode Pulsed Current (Note 3)	I_{SM}			24		A
Drain-Source Diode Forward Voltage (Note 2)	V_{SD}	$I_S=6\text{A}, V_{GS}=0\text{V}, T_J = 25^\circ\text{C}$		1.4		V

Notes: 1. Pulse Test: Pulse width $\leq 250\mu\text{s}$, Duty cycle $\leq 2\%$


2. Essentially independent of operating temperature

3. Repetitive Rating: Pulse width limited by maximum junction temperature


■ TEST CIRCUITS AND WAVEFORMS

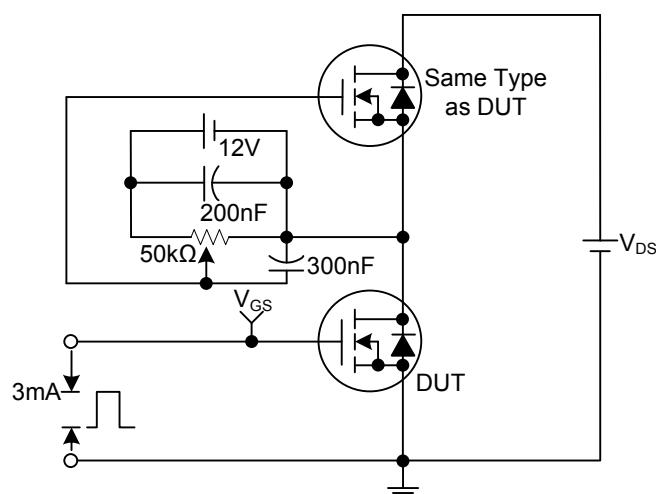


Gate Charge Test Circuit

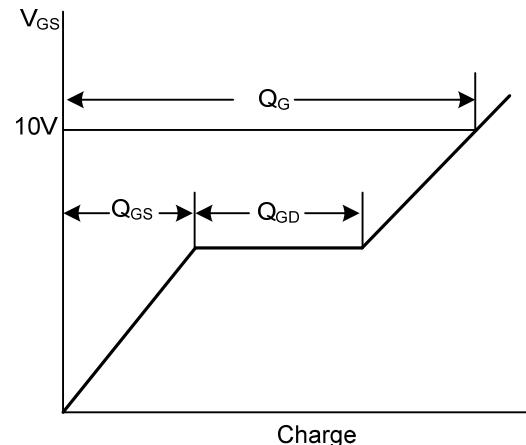


Gate Charge Waveforms

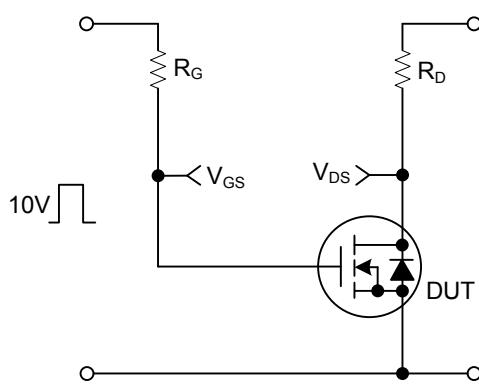


Resistive Switching Test Circuit

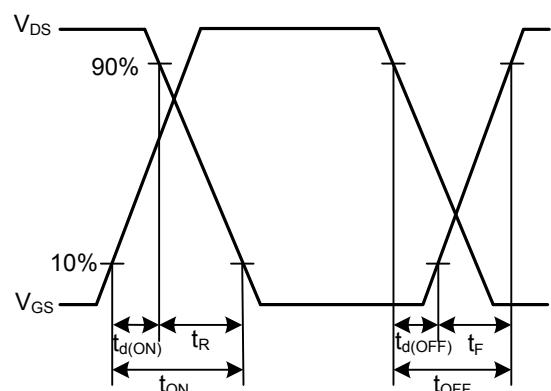

Resistive Switching Waveforms



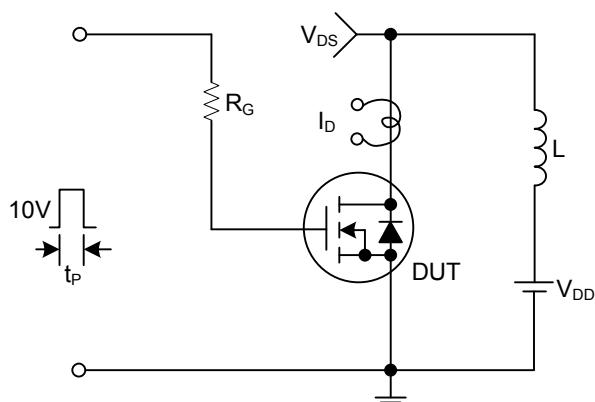


Unclamped Inductive Switching Test Circuit

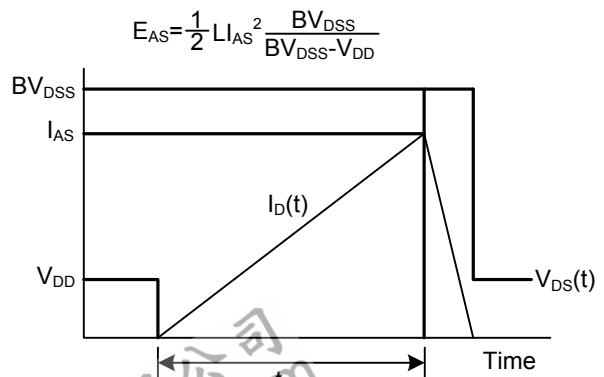

Unclamped Inductive Switching Waveforms

■ TEST CIRCUITS AND WAVEFORMS(Cont.)

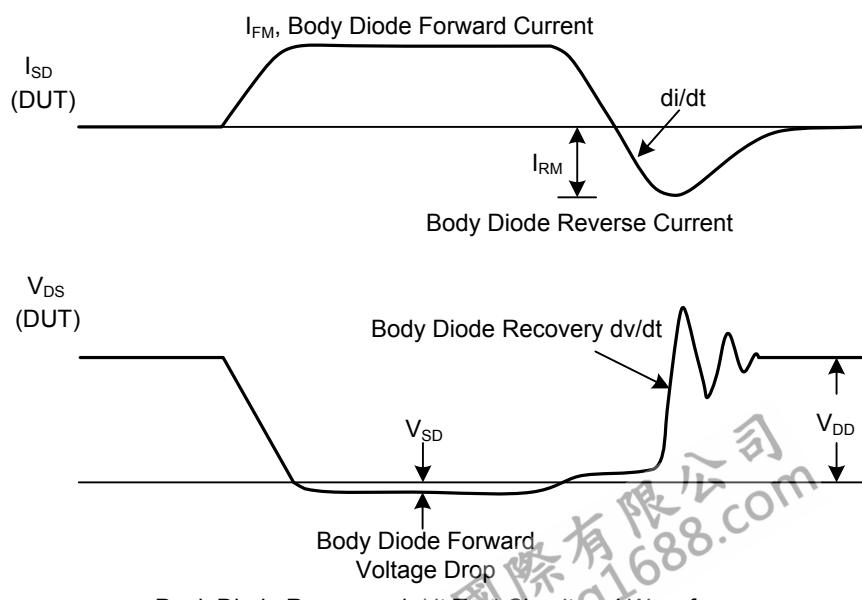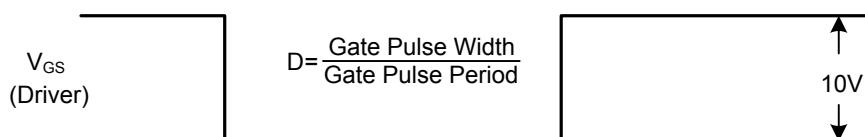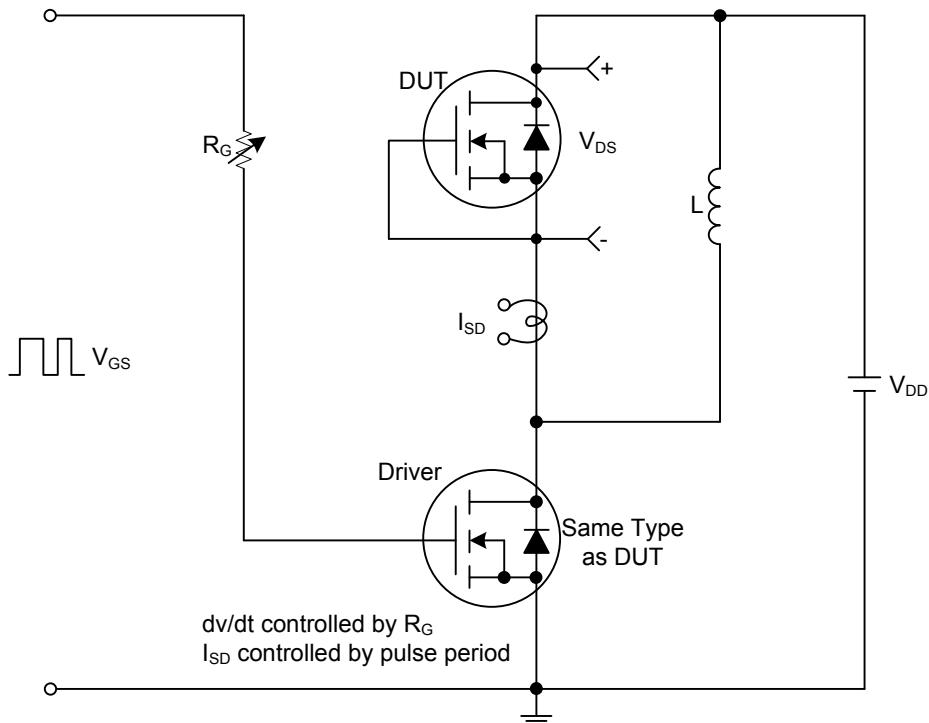

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

