

6NM90

Power MOSFET


6A, 900V N-CHANNEL SUPER-JUNCTION MOSFET

■ DESCRIPTION


The **UTC 6NM90** is a Super Junction MOSFET Structure and is designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and a high rugged avalanche characteristics. This power MOSFET is usually used at AC-DC converters for power applications.

■ FEATURES

- * $R_{DS(ON)} \leq 1.9 \Omega$ @ $V_{GS}=10V$, $I_D=3.0A$
- * Fast switching capability
- * Avalanche energy tested
- * Improved dv/dt capability, high ruggedness

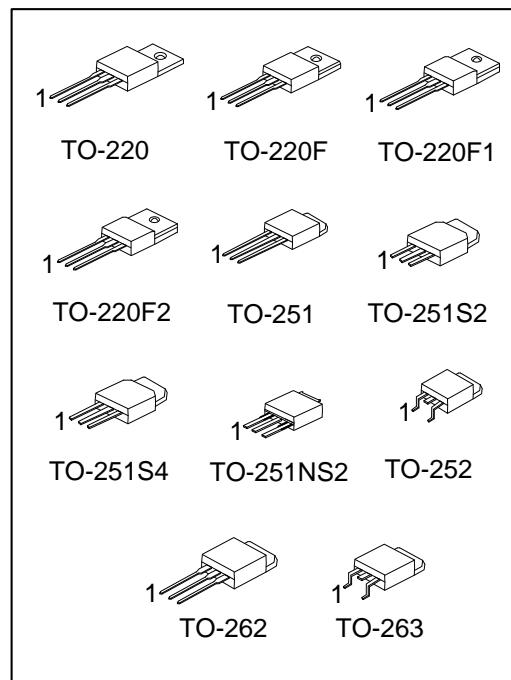

■ SYMBOL




■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
6NM90L-TA3-T	6NM90G-TA3-T	TO-220	G	D	S	Tube
6NM90L-TF1-T	6NM90G-TF1-T	TO-220F1	G	D	S	Tube
6NM90L-TF2-T	6NM90G-TF2-T	TO-220F2	G	D	S	Tube
6NM90L-TF3-T	6NM90G-TF3-T	TO-220F	G	D	S	Tube
6NM90L-TM3-T	6NM90G-TM3-T	TO-251	G	D	S	Tube
6NM90L-TMS2-T	6NM90G-TMS2-T	TO-251S2	G	D	S	Tube
6NM90L-TMS4-T	6NM90G-TMS4-T	TO-251S4	G	D	S	Tube
6NM90L-TMN2-T	6NM90G-TMN2-T	TO-251NS2	G	D	S	Tube
6NM90L-TN3-R	6NM90G-TN3-R	TO-252	G	D	S	Tape Reel
6NM90L-T2Q-T	6NM90G-T2Q-T	TO-262	G	D	S	Tube
6NM90L-TQ2-T	6NM90G-TQ2-T	TO-263	G	D	S	Tube
6NM90L-TQ2-R	6NM90G-TQ2-R	TO-263	G	D	S	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

 (1)Packing Type (2)Package Type (3)Green Package	(1) T: Tube, R: Tape Reel (2) TA3: TO-220, TF1: TO-220F1, TF2: TO-220F2 TF3: TO-220F, TM3: TO-251, TMS2: TO-251S2, TMN2: TO-251NS2, TMS4: TO-251S4, TN3: TO-252, T2Q: TO-262, TQ2: TO-263 (3) G: Halogen Free and Lead Free, L: Lead Free
--	--

■ MARKING

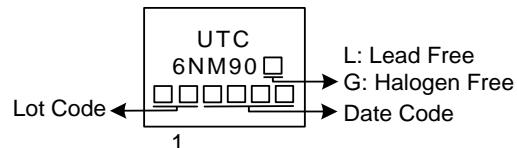

■ ABSOLUTE MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	900	V
Gate-Source Voltage		V_{GSS}	± 30	V
Continuous Drain Current	Continuous	I_D	6.0	A
Pulsed Drain Current	Pulsed (Note 2)	I_{DM}	24	A
Single Pulsed Avalanche Energy	Single Pulsed (Note 3)	E_{AS}	50.88	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	2.25	V/ns
Power Dissipation	TO-220/TO-262	P_D		
	TO-263		50	W
	TO-220F/TO-220F1		26	W
	TO-220F2			
	TO-251/TO-251S2		45	W
	TO-251S4/TO-251NS2			
	TO-252			
Junction Temperature		T_J	+150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature.

3. $L = 159\text{mH}$, $I_{AS} = 0.8\text{A}$, $V_{DD} = 50\text{V}$, $R_G = 25\Omega$, Starting $T_J = 25^\circ\text{C}$.

4. $I_{SD} \leq 6.0\text{A}$, $di/dt \leq 200\text{A}/\mu\text{s}$, $V_{DD} \leq BV_{DSS}$, Starting $T_J = 25^\circ\text{C}$.

■ THERMAL DATA

PARAMETER		SYMBOL	RATING	UNIT
Junction to Ambient	TO-220/TO-220F TO-220F1/TO-220F2 TO-262/TO-263	θ_{JA}	62.5	$^\circ\text{C/W}$
	TO-251/TO-251S2 TO-251S4/TO-251NS2 TO-252		110	$^\circ\text{C/W}$
Junction to Case	TO-220/TO-262 TO-263	θ_{JC}	2.5	$^\circ\text{C/W}$
	TO-220F/TO-220F1 TO-220F2		4.81	$^\circ\text{C/W}$
	TO-251/TO-251S2 TO-251S4/TO-251NS2 TO-252		2.78 (Note)	$^\circ\text{C/W}$

Note: Device mounted on FR-4 substrate PC board, 2oz copper, with 1inch square copper plate.



UNISONIC TECHNOLOGIES CO., LTD
www.unisonic.com.tw


■ ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}} = 0\text{V}, I_{\text{D}} = 250\mu\text{A}$	900			V
Drain-Source Leakage Current	I_{DSS}	$V_{\text{DS}} = 900\text{V}, V_{\text{GS}} = 0\text{V}$		10		μA
Gate-Source Leakage Current	Forward	$V_{\text{GS}} = 30\text{V}, V_{\text{DS}} = 0\text{V}$		100		nA
	Reverse	$V_{\text{GS}} = -30\text{V}, V_{\text{DS}} = 0\text{V}$		-100		nA
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{\text{GS}(\text{TH})}$	$V_{\text{DS}} = V_{\text{GS}}, I_{\text{D}} = 250\mu\text{A}$	2.5		4.5	V
Static Drain-Source On-State Resistance	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}} = 10\text{V}, I_{\text{D}} = 3.0\text{A}$			1.9	Ω
DYNAMIC CHARACTERISTICS						
Input Capacitance	C_{ISS}	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=25\text{V}, f=1.0\text{MHz}$		500		pF
Output Capacitance	C_{OSS}			165		pF
Reverse Transfer Capacitance	C_{RSS}			4		pF
SWITCHING CHARACTERISTICS						
Total Gate Charge (Note 1)	Q_G	$V_{\text{DS}}=100\text{V}, V_{\text{GS}}=10\text{V}, I_{\text{D}}=6\text{A}, I_{\text{G}}=1\text{mA}$		19.6		nC
Gate to Source Charge	Q_{GS}			4.2		nC
Gate to Drain Charge	Q_{GD}			6.6		nC
Turn-ON Delay Time (Note 1)	$t_{\text{D}(\text{ON})}$	$V_{\text{DD}}=100\text{V}, V_{\text{GS}}=10\text{V}, I_{\text{D}}=6\text{A}, R_{\text{G}}=25\Omega, (\text{Note 1,2})$		8		nS
Rise Time	t_R			18.5		nS
Turn-OFF Delay Time	$t_{\text{D}(\text{OFF})}$			60		nS
Fall-Time	t_F			45		nS
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Maximum Body-Diode Continuous Current	I_S				6.0	A
Maximum Body-Diode Pulsed Current	I_{SM}				12	A
Drain-Source Diode Forward Voltage (Note 1)	V_{SD}	$I_S=6.0\text{A}, V_{\text{GS}}=0\text{V}$			1.4	V
Body Diode Reverse Recovery Time (Note 1)	t_{rr}	$I_S=6.0\text{A}, V_{\text{GS}}=0\text{V}, V_R=200\text{V}, dI_F/dt=100\text{A}/\mu\text{s}$		500		nS
Body Diode Reverse Recovery Charge	Q_{rr}				5.6	μC


Notes: 1. Pulse Test : Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$.

2. Essentially independent of operating ambient temperature.

■ TEST CIRCUITS AND WAVEFORMS


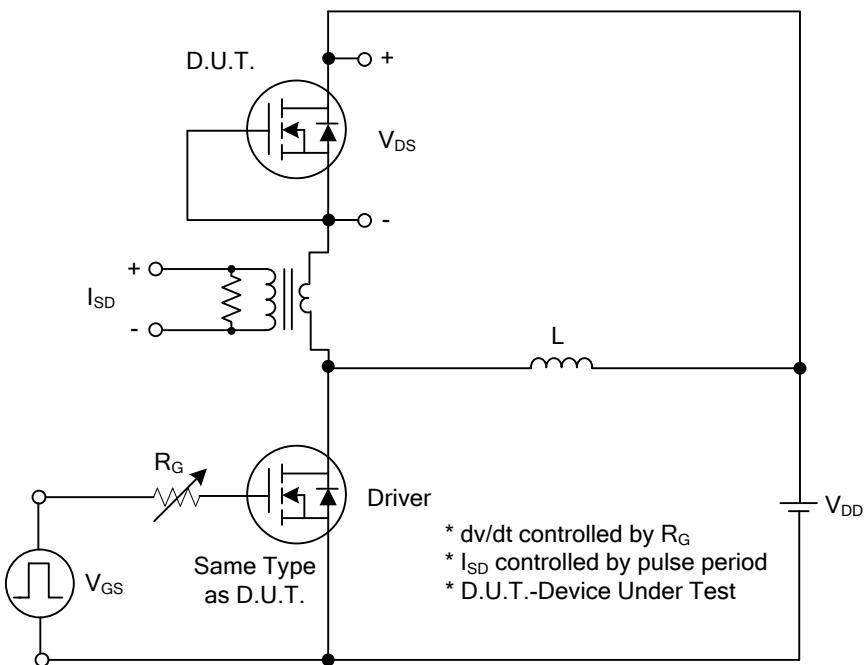


Peak Diode Recovery dv/dt Test Circuit

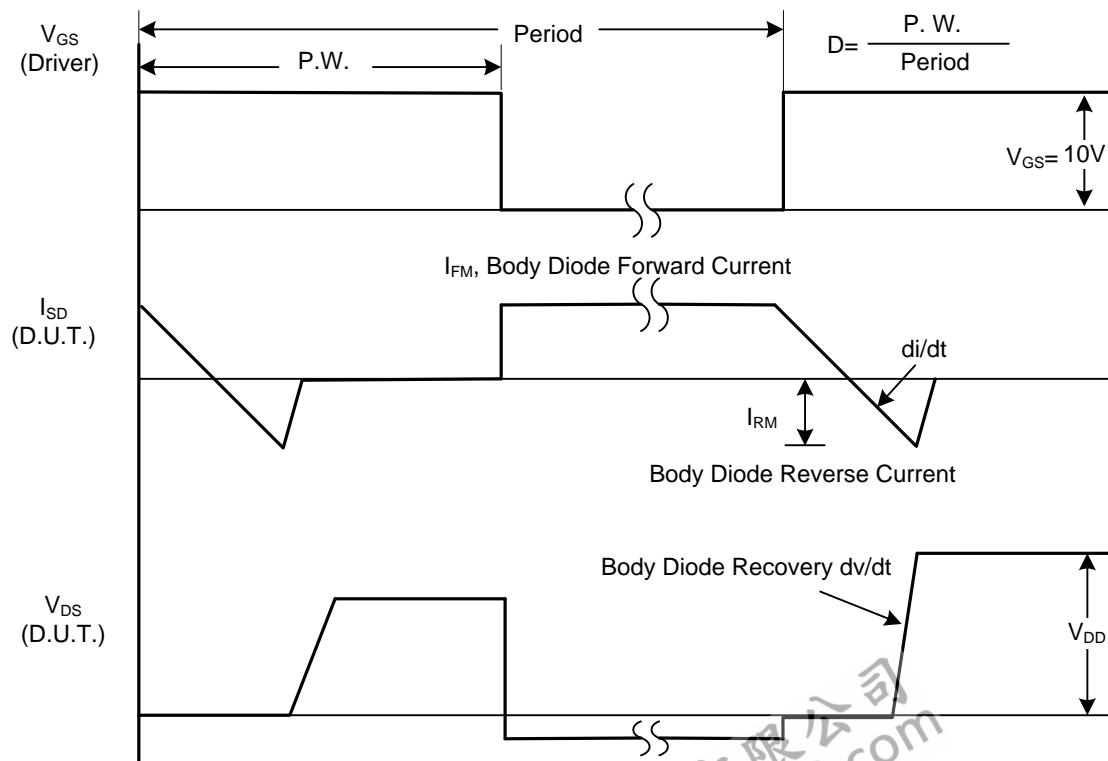



Peak Diode Recovery dv/dt Waveforms

■ TEST CIRCUITS AND WAVEFORMS

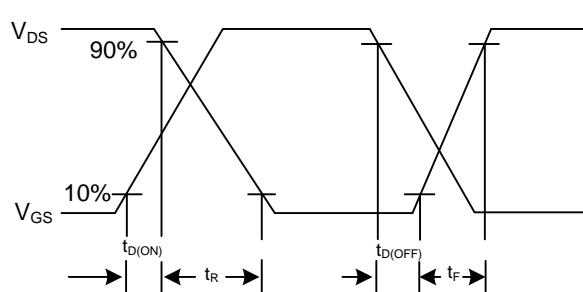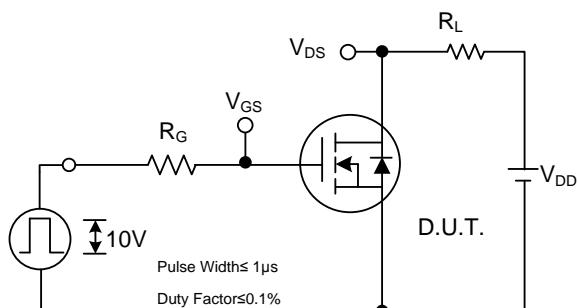



Switching Test Circuit

Switching Waveforms

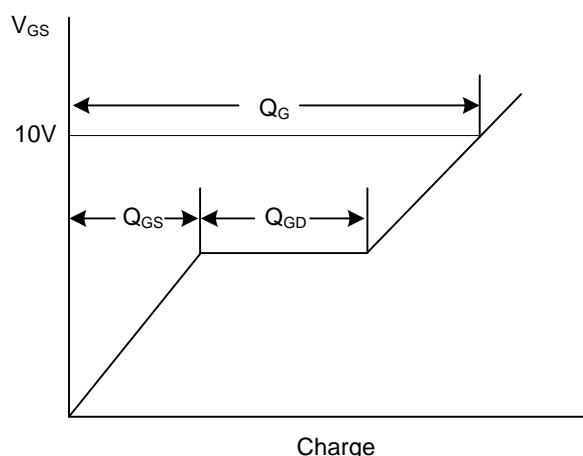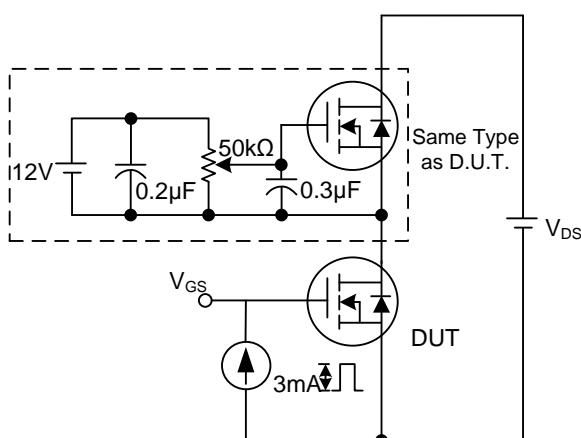

Gate Charge Test Circuit







Gate Charge Waveform

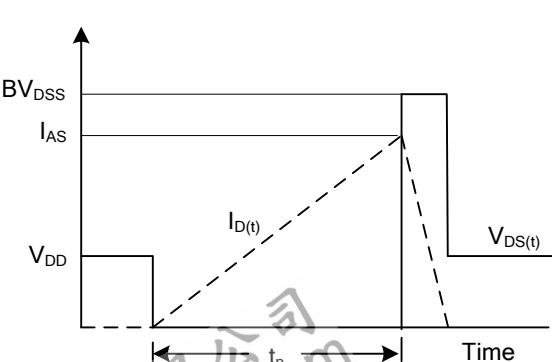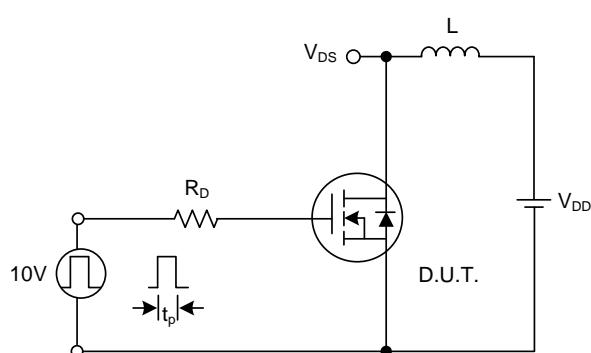







Unclamped Inductive Switching Test Circuit


Unclamped Inductive Switching Waveforms

■ TYPICAL CHARACTERISTICS

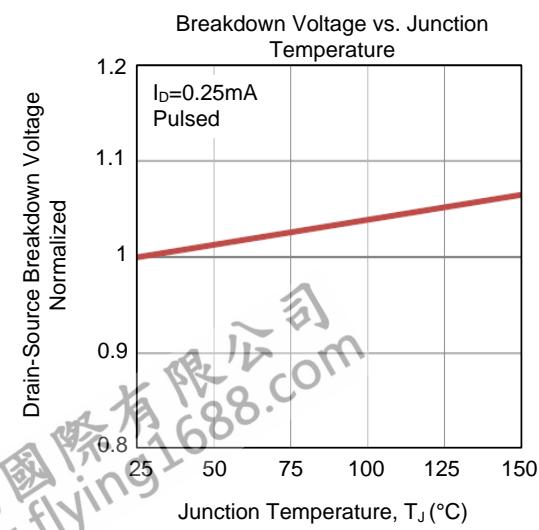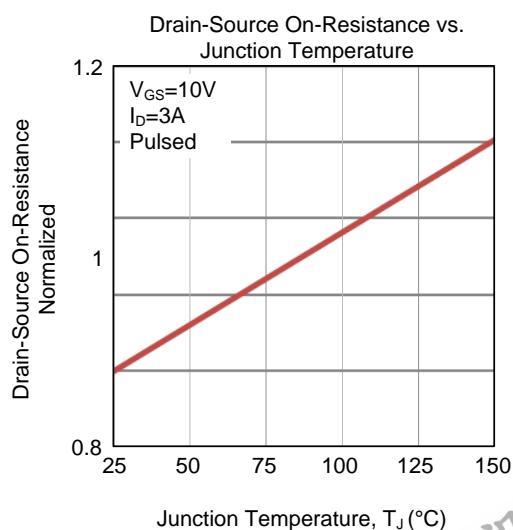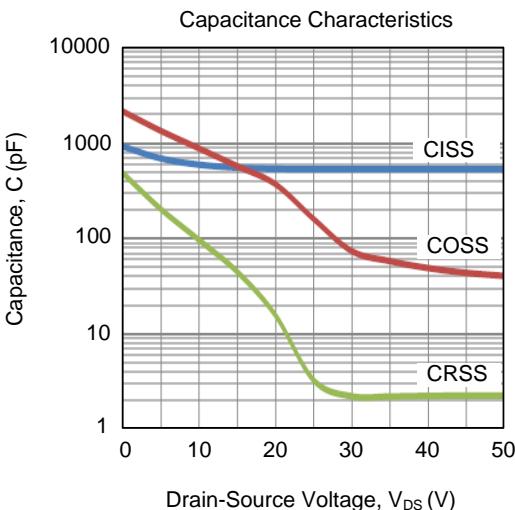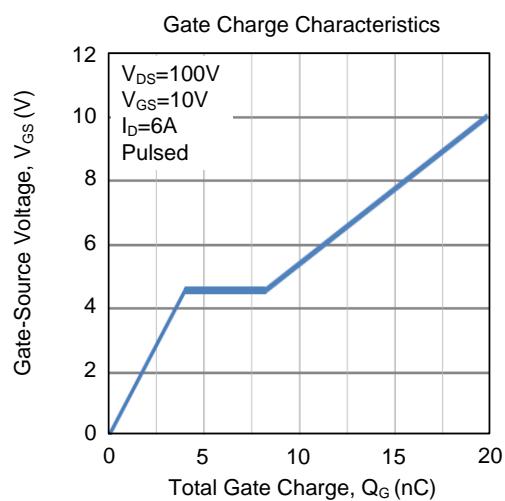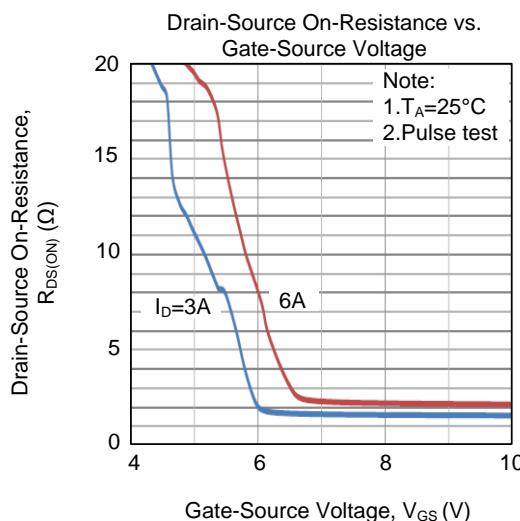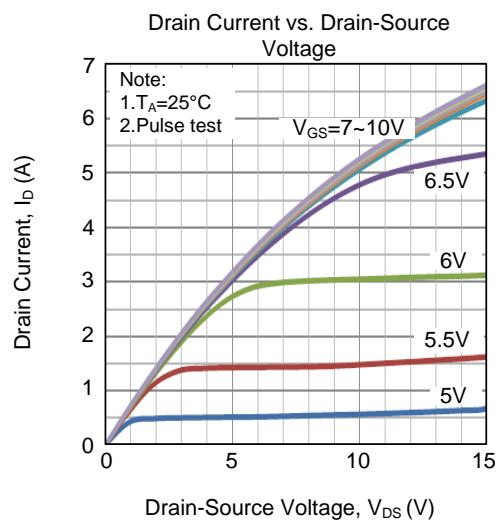

■ TYPICAL CHARACTERISTICS (Cont.)

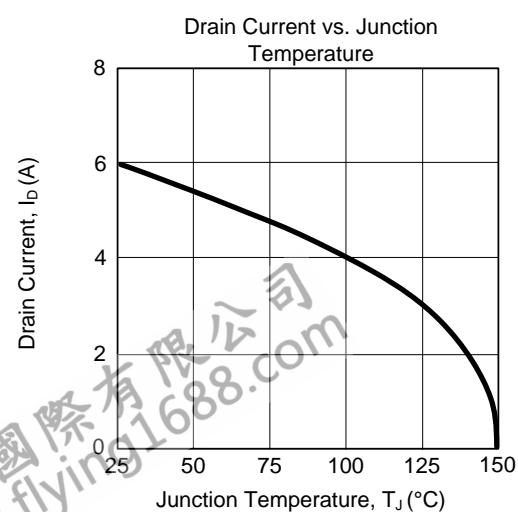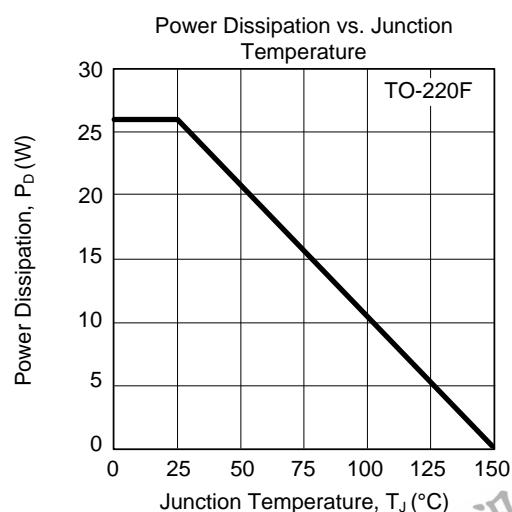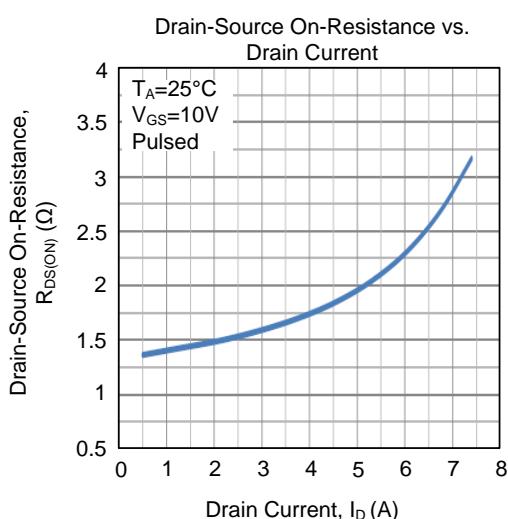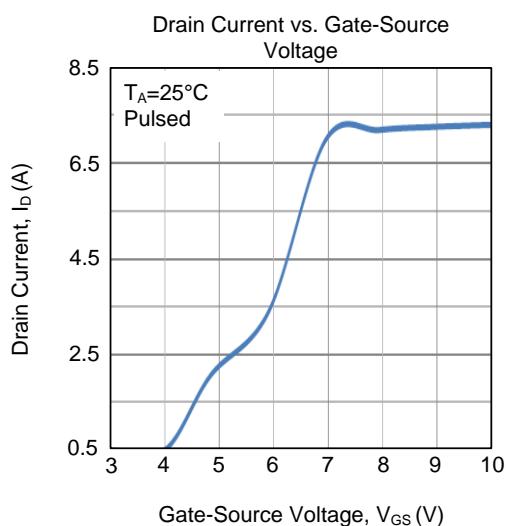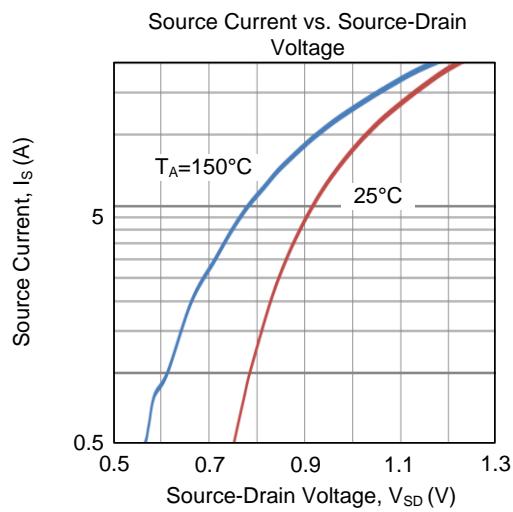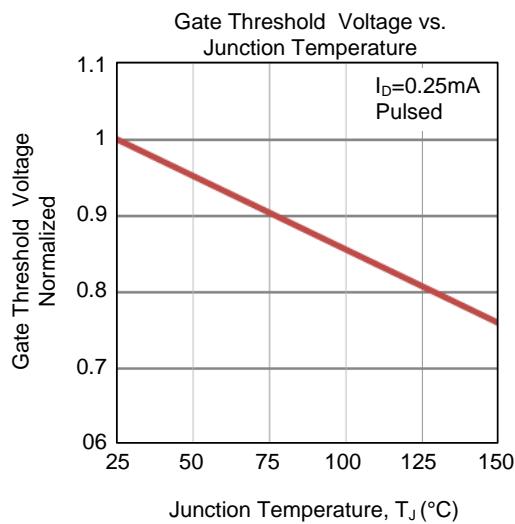

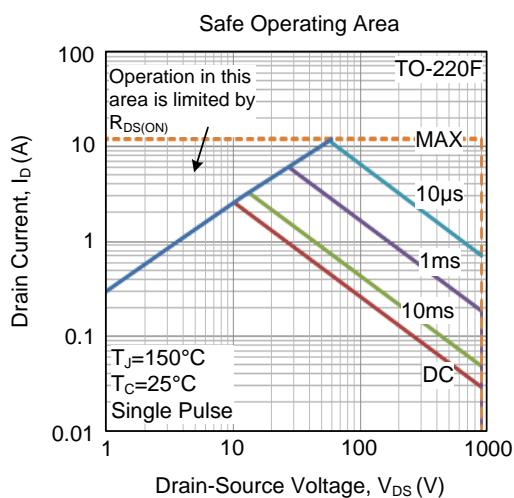■ TYPICAL CHARACTERISTICS (Cont.)

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.