




75185

LINEAR INTEGRATED CIRCUIT

MULTIPLE RS-232 DRIVERS AND RECEIVERS

DESCRIPTION

The UTC **75185** complies with the requirements of the TIA/EIA232-F and ITU (formerly CCITT) v.28 standards. These standards are for data interchange between a host computer and peripheral at signaling rates up to 20kbit/s. The switching speeds of the UTC **75185** are fast enough to support rates up to 120kbit/s with lower capacitive loads (shorter cables). Interoperability at the higher signaling rates cannot be assured unless the designer has design control of the cable and the interface circuits at both ends. For interoperability at signaling rates to 120kbit/s, use of ITA/EIA-423-B (ITU v.10) and TIA/EIA-422-B (ITU v.11) standards are recommended.

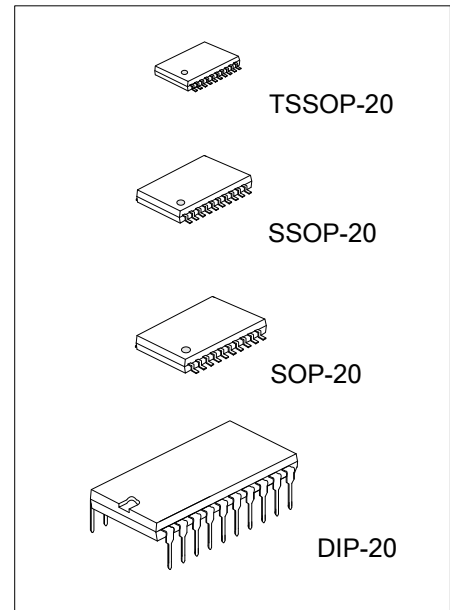

FEATURES

- *Single Chip with Easy Interface between UART and Serial-Port connector of PC.
- *Three Drivers and five Receivers Meet or Exceed the Requirements of TIA/EIA-232-F and ITU v.28 Standards.
- *Designed to Support Data Rates up to 120 kbps

ORDERING INFORMATION


| Ordering Number | | Package | Packing |
|-----------------|--------------|----------|-----------|
| Lead Free | Halogen Free | | |
| 75185L-D20-T | 75185G-D20-T | DIP-20 | Tube |
| - | 75185G-P20-R | TSSOP-20 | Tape Reel |
| - | 75185G-R20-R | SSOP-20 | Tape Reel |
| - | 75185G-S20-R | SOP-20 | Tape Reel |

| | |
|--|--|
| <p>75185L-D20-R</p> <ul style="list-style-type: none"> (1)Packing Type (2)Package Type (3)Green Package | <ul style="list-style-type: none"> (1) R: Tape Reel (2) D20: DIP-20, P20: TSSOP-20, R20: SSOP-20, S20: SOP-20 (3) L: Lead Free, G: Halogen Free |
|--|--|

MARKING

| DIP-20 | TSSOP-20 / SSOP-20 / SOP-20 |
|--------|-----------------------------|
| | |

■ PIN CONFIGURATIONS

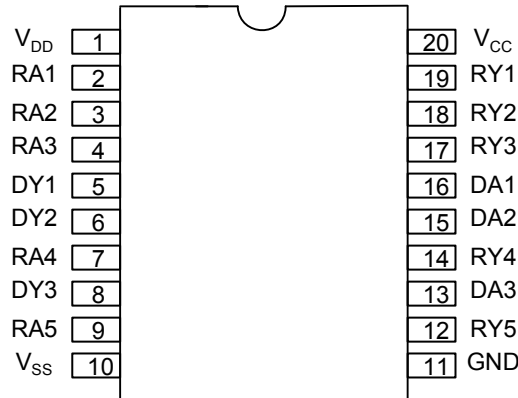

■ PIN DESCRIPTION

| PIN NO | SYMBOL | PIN DESCRIPTION |
|--------|-----------------|------------------------|
| 1 | V _{DD} | Supply Voltage |
| 2 | RA1 | First Receiver Input |
| 3 | RA2 | Second Receiver Input |
| 4 | RA3 | Third Receiver Input |
| 5 | DY1 | First Driver Output |
| 6 | DY2 | Second Driver Output |
| 7 | RA4 | Fourth Receiver Input |
| 8 | DY3 | Third Driver Output |
| 9 | RA5 | Fifth Receiver Input |
| 10 | V _{SS} | Supply Voltage |
| 11 | GND | Ground |
| 12 | RY5 | Fifth Receiver Output |
| 13 | DA3 | Third Driver Input |
| 14 | RY4 | Fourth Receiver Output |
| 15 | DA2 | Second Driver Input |
| 16 | DA1 | First Driver Input |
| 17 | RY3 | Third Receiver Output |
| 18 | RY2 | Second Receiver Output |
| 19 | RY1 | First Receiver Output |
| 20 | V _{CC} | Supply Voltage |

- ABSOLUTE MAXIMUM RATINGS OVER OPERATING FREE-AIR TEMPERATURE RANGE (unless otherwise specified)

| PARAMETER | | SYMBOL | RATINGS | UNIT |
|-----------------------------------|----------|-----------|------------|------|
| Supply Voltage (Note 1) | | V_{DD} | 15 | V |
| | | V_{SS} | -15 | V |
| | | V_{CC} | 10 | V |
| Input Voltage Range | Drive | V_{IN} | -15 ~ 7 | V |
| | Receiver | | -30 ~ 30 | V |
| Driver Output Voltage Range | | V_{OUT} | -15~ 15 | V |
| Receiver Low Level Output Current | | I_{OUT} | 20 | mA |
| Storage Temperature Range | | T_{STG} | -65 ~ +150 | °C |

- THERMAL DATA

| PARAMETER | | SYMBOL | RATINGS | UNIT |
|---------------------|----------|---------------|---------|------|
| Junction to Ambient | DIP-20 | θ_{JA} | 70 | °C/W |
| | SOP-20 | | 100 | |
| | SSOP-20 | | 115 | |
| | TSSOP-20 | | 115 | |

Notes: 1. All voltage are with respect to the network ground terminal.

2. The package thermal impedance is calculated in accordance with JESD 51, except for through-hole packages, which use a trace length of zero.

- RECOMMENDED OPERATING CONDITIONS

| PARAMETER | | SYMBOL | MIN | TYP | MAX | UNIT |
|--------------------------------|------------|----------|------|-----|------|------|
| Supply Voltage | | V_{DD} | 7.5 | 9 | 15 | V |
| | | V_{SS} | -7.5 | -9 | -15 | V |
| | | V_{CC} | 4.5 | 5 | 5.5 | V |
| Input Voltage (Driver Only) | High Level | V_{IH} | 1.9 | | | V |
| | Low Level | V_{IL} | | | 0.8 | V |
| High Level Output Current | Drive | I_{OH} | | | -6.0 | mA |
| | Receiver | | | | -0.5 | |
| Low Level Output Current | Drive | I_{OL} | | | 6 | mA |
| | Receiver | | | | 16 | |
| Operating Free-Air Temperature | | T_A | 0 | | 70 | °C |

- SUPPLY CURRENTS

| PARAMETER | SYMBOL | TEST CONDITIONS | | MIN | MAX | UNIT |
|------------------------------|----------|--|----------|-----|------|------|
| | | V_{DD} | V_{SS} | | | |
| Supply Current From V_{DD} | I_{DD} | No load. All inputs at 1.9V | 9 | -9 | 15 | mA |
| | | | 12 | -12 | 19 | |
| | | | 15 | -15 | 25 | |
| | | No load. All inputs at 0.8V | 9 | -9 | 4.5 | mA |
| | | | 12 | -12 | 5.5 | |
| | | | 15 | -15 | 9 | |
| Supply Current From V_{SS} | I_{SS} | No load. All inputs at 1.9V | 9 | -9 | -15 | mA |
| | | | 12 | -12 | -19 | |
| | | | 15 | -15 | -25 | |
| | | No load. All inputs at 0.8V | 9 | -9 | -3.2 | mA |
| | | | 12 | -12 | -3.2 | |
| | | | 15 | -15 | -3.2 | |
| Supply Current From V_{CC} | I_{CC} | No load. All inputs at 5V, $V_{CC}=5V$ | | | 30 | mA |

■ DRIVER ELECTRICAL CHARACTERISTICS OVER RECOMMENDED OPERATING FREE-AIR TEMPERATURE RANGE ($V_{DD}=9V$, $V_{SS}=-9V$, $V_{CC}=5V$, unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--|-------------|---|------|------|-------|---------------|
| High Level Output Voltage | V_{OH} | $V_{IL}=0.8V$, $R_L=3\text{ k}\Omega$ (Figure 1) | 6 | 7.5 | | V |
| Low Level Output Voltage (Note 3) | V_{OL} | $V_{IH}=1.9V$, $R_L=3\text{ k}\Omega$ (Figure 1) | | -7.5 | -6 | V |
| High Level Input Current | I_{IH} | $V_{IN}=5V$ (Figure 2) | | | 10 | μA |
| Low Level Input Current | I_{IL} | $V_{IN}=0V$ (Figure 2) | | | -1.6 | mA |
| High Level Short Circuit Output Current (Note 4) | $I_{OS(H)}$ | $V_{IL}=0.8V$, $V_{OUT}=0V$ (Figure 1) | -4.5 | -12 | -19.5 | mA |
| Low Level Short Circuit Output Current | $I_{OS(L)}$ | $V_{IH}=2V$, $V_{OUT}=0V$ (Figure 1) | 4.5 | 12 | 19.5 | mA |
| Output Resistance (Note 5) | R_{OUT} | $V_{DD}=V_{SS}=V_{CC}=0V$, $V_{OUT}=-2\text{ to }2V$ | 300 | | | Ω |

Note 3: The algebraic convention, where the more positive (less negative) limit is designated as maximum, is used in this datasheet for logic levels only (e.g. if -10V is a maximum, the typical value is a more negative voltage).

Note 4: Output short circuit conditions must maintain the total power dissipation below absolute maximum ratings.

Note 5: Test conditions are those specified by TIA/EIA232-F and as listed above.

■ DRIVER SWITCHING CHARACTERISTICS ($V_{DD}=12V$, $V_{SS}=-12V$, $V_{CC}=5V$, $T_A=25^\circ\text{C}$)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT | |
|-------------------------------------|-------------|-----------------|---|-----|-----|------|---------------|
| Propagation Delay Time Level Output | Low to High | t_{PLH} | $R_L=3\text{ to }7\text{ k}\Omega$, $C_L=15\text{pF}$ (Figure 3) | | 315 | 500 | ns |
| | High to Low | t_{PHL} | $R_L=3\text{ to }7\text{ k}\Omega$, $C_L=15\text{pF}$ (Figure 3) | | 75 | 175 | ns |
| Transition Time Level Output | Low to High | t_{TLH} | $R_L=3\text{ to }7\text{ k}\Omega$, $C_L=15\text{pF}$ (Figure 3) | | 60 | 100 | ns |
| | | | $R_L=3\text{ to }7\text{ k}\Omega$, $C_L=2500\text{pF}$ (Note 6, Figure 3) | | 1.7 | 2.5 | μs |
| Transition Time Level Output | High to Low | t_{THL} | $R_L=3\text{ to }7\text{ k}\Omega$, $C_L=15\text{pF}$ (Figure 3) | | 40 | 75 | ns |
| | | | $R_L=3\text{ to }7\text{ k}\Omega$, $C_L=2500\text{pF}$ (Note 7, Figure 3) | | 1.5 | 2.5 | μs |

Note 6: Measured between -3V and 3V points of the output waveform (TIA/EIA-232-F conditions), all unused inputs are tied.

Note 7: Measured between 3V and -3V points of the output waveform (TIA/EIA-232-F conditions), all unused inputs are tied.

■ RECEIVER ELECTRICAL CHARACTERISTICS OVER RECOMMENDED OPERATING CONDITIONS ($T_A=25^\circ\text{C}$, $V_{CC}=5V$, $V_{DD}=9V$, $V_{SS}=-9V$)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT | | |
|--|------------|---|------------------------------------|----------------|------|------|----|---|
| Positive Going Threshold Voltage | V_{T+} | (Figure 5) | | | | | | |
| | | $T_A=25^\circ\text{C}$ | 1.75 | 1.9 | 2.3 | V | | |
| | | $T_A=0^\circ\text{C to }70^\circ\text{C}$ | 1.55 | | 2.3 | | | |
| Negative Going Threshold Voltage | V_{T-} | | 0.75 | 0.97 | 1.25 | V | | |
| Input Hysteresis ($V_{T+} - V_{T-}$) | V_{HYS} | | 0.5 | | | V | | |
| Output Voltage | High level | V_{OH} | $I_{OH}=-0.5\text{mA}$ | $V_{IH}=0.75V$ | 2.6 | 4 | 5 | V |
| | | | | Inputs Open | 2.6 | | | |
| | Low level | V_{OL} | $V_{IN}=3V$, $I_{OL}=10\text{mA}$ | | 0.2 | 0.45 | V | |
| Input Current | High level | I_{IH} | $V_{IN}=25V$ (Figure 5) | 3.6 | | 8.3 | mA | |
| | | | $V_{IN}=3V$ (Figure 5) | 0.43 | | | | |
| | Low level | I_{IL} | $V_{IN}=-25V$ (Figure 5) | -3.6 | | -8.3 | mA | |
| | | | $V_{IN}=-3V$ (Figure 5) | -0.43 | | | | |
| Short-Circuit Output Current | I_{OS} | (Figure 4) | | 3.4 | -12 | mA | | |

■ RECEIVER SWITCHING CHARACTERISTICS ($V_{DD}=12V$, $V_{SS}=-12V$, $V_{CC}=5V$, $T_A=25^\circ\text{C}$)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------------------------|-------------|-----------------|--|-----|-----|------|
| Propagation Delay Time Level Output | Low to High | t_{PLH} | | 107 | 500 | ns |
| | High to Low | t_{PHL} | $R_L=5\text{ k}\Omega$, $C_L=50\text{pF}$ | 42 | 150 | ns |
| Transition Time Level Output | Low to High | t_{TLH} | (Figure 6) | 175 | 525 | ns |
| | High to Low | t_{THL} | | 16 | 60 | ns |

PARAMETER MEASUREMENT INFORMATION

DRIVER TEST CIRCUITS:

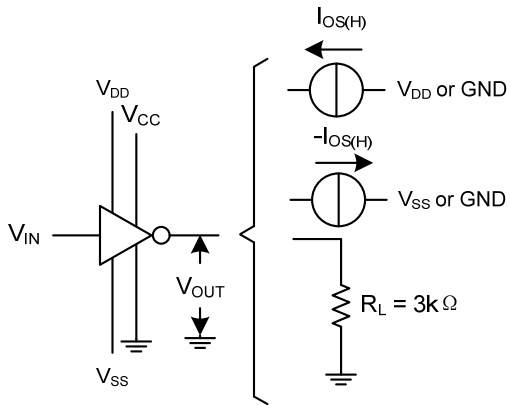


Figure 1. For V_{OH} , V_{OL} , $I_{OS(H)}$, $I_{OS(L)}$

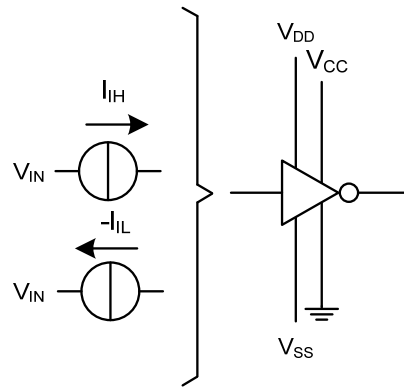


Figure 2. For I_{IH} , I_{IL}

DRIVER VOLTAGE WAVEFORMS:

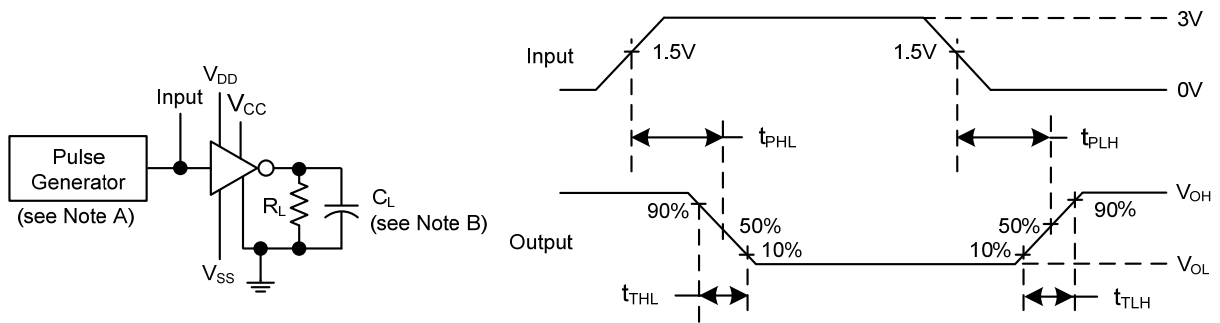


Figure 3.

- Note: 1. The pulse generator has the following characteristics: $t_w=25\mu s$, $PRR=20kHz$, $Z_o=50\Omega$, $t_r=t_f<50ns$.
- 2. C_L includes probe and jig capacitance.

PARAMETER MEASUREMENT INFORMATION (Cont.)

RECEIVER TEST CIRCUITS:




Figure 4. For I_{0S}

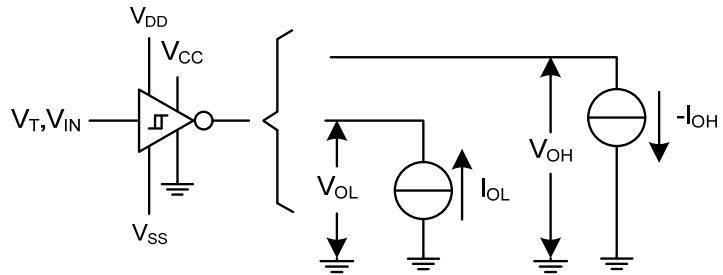


Figure 5. For V_T , V_{OH} , V_{OL}

RECEIVER PROPAGATION AND TRANSITION TIMES:

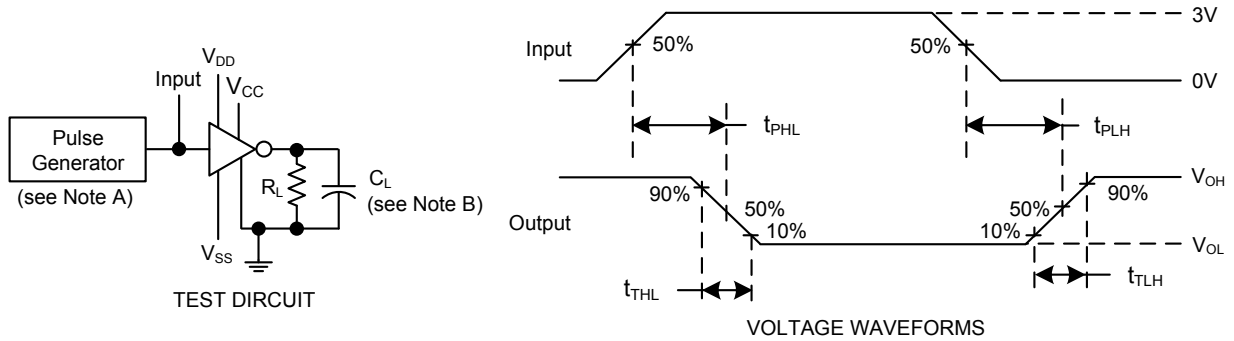



Figure 6.

Note: 1. The pulse generator has the following characteristics: $t_w = 25\mu s$, $PRR = 20kHz$, $Z_0 = 50\Omega$, $t_r=t_f < 50ns$.
 2. C_L includes probe and jig capacitance.

■ APPLICATION INFORMATION


Power-Supply protection to meet Power-Off fault conditions of TIA/TIA-232-F

Diodes placed in series with the V_{DD} and V_{SS} leads protect the device in the fault condition in which the device outputs are shorted to $\pm 15V$ and the power supplies are at low and provide low-impedance paths to ground.

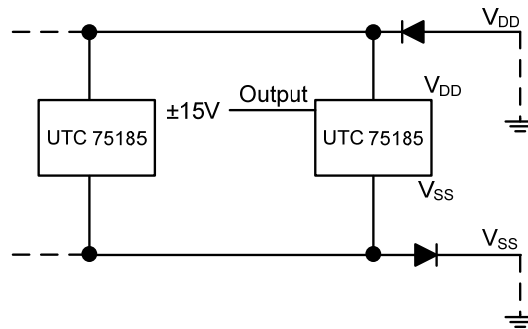


Typical Connection


“*”: Refer Figure 10 to select the correct values for the loading capacitors (C1, C2, and C3), which are required to meet the RS-232 maximum slew-rate requirement of $30V/\mu s$. The value of the loading capacitors required depends upon the line length and desired slew rate, but typically is 330 pF.

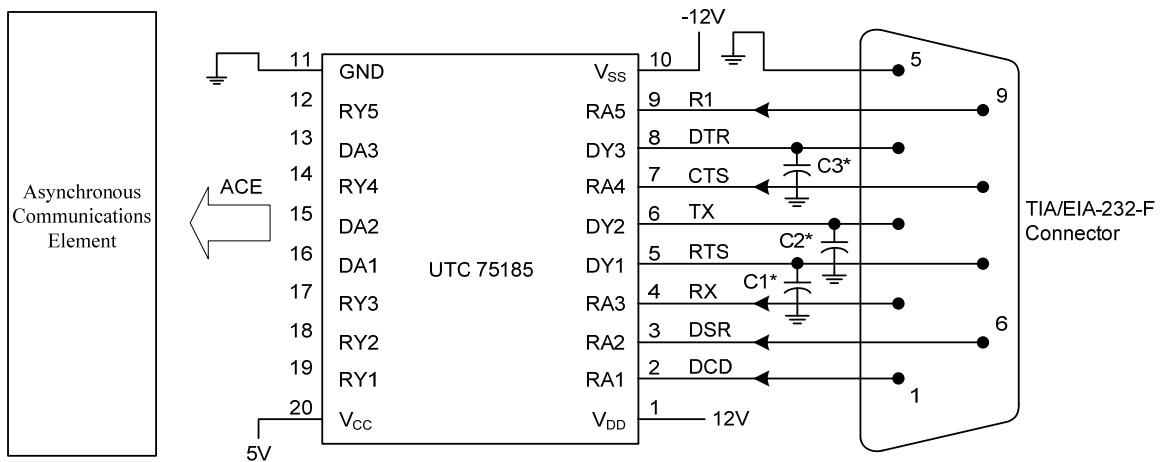


LOGIC SYMBOL AND LOGIC DIAGRAM

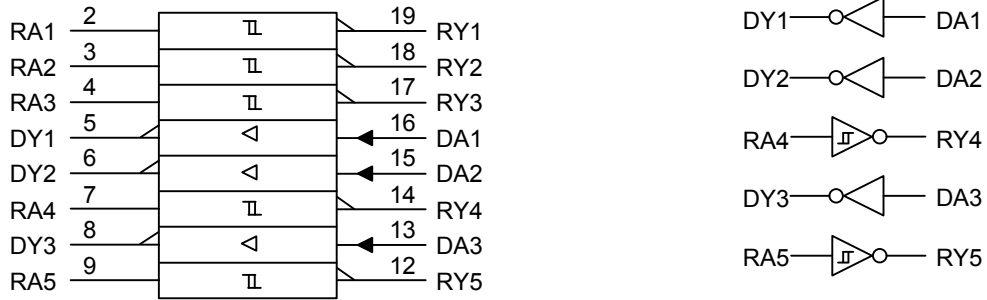





CIRCUIT OF DRIVERS (Resistor value shown are nominal.)

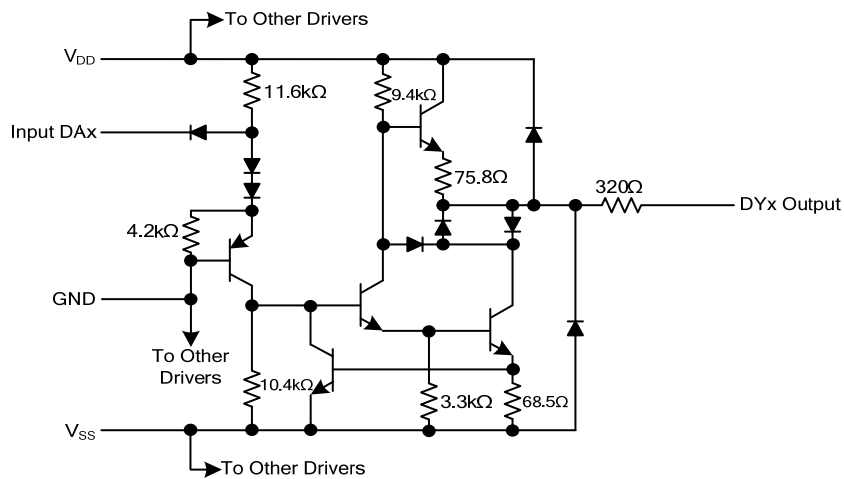




CIRCUIT OF EACH RECEIVER (Resistor value shown are nominal.)

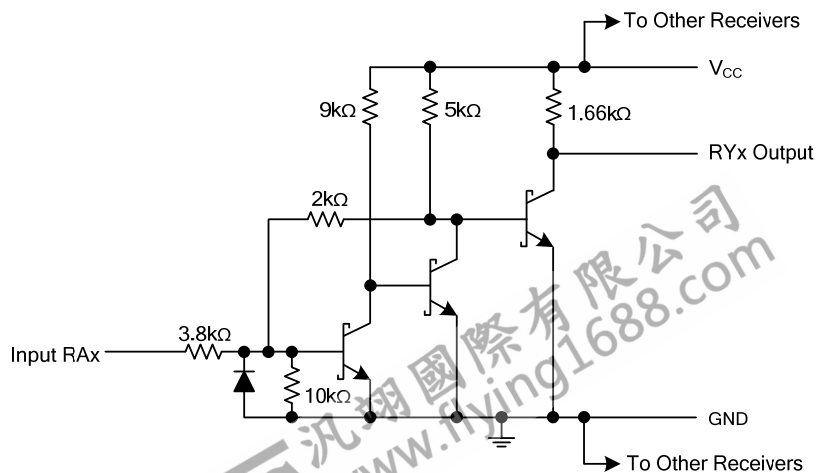


■ TYPICAL CHARACTERISTICS (DRIVER)

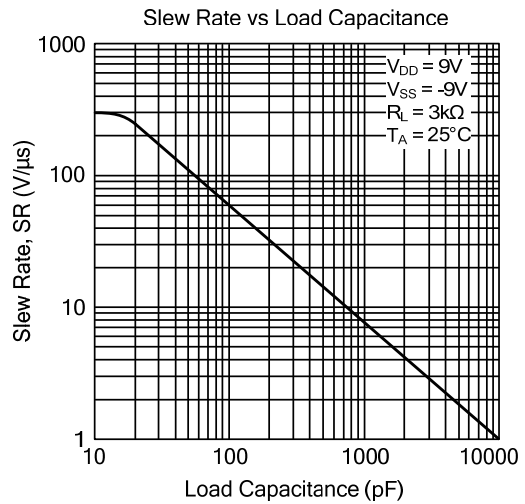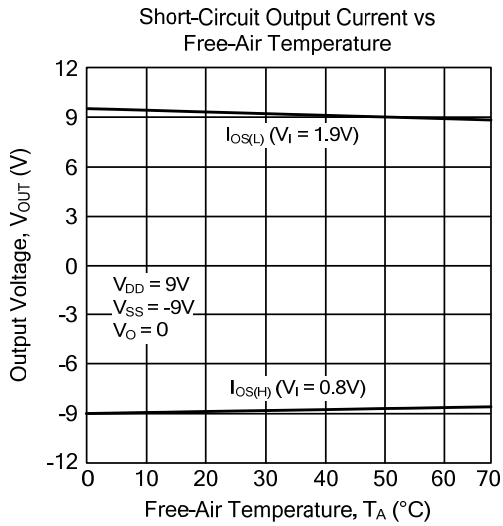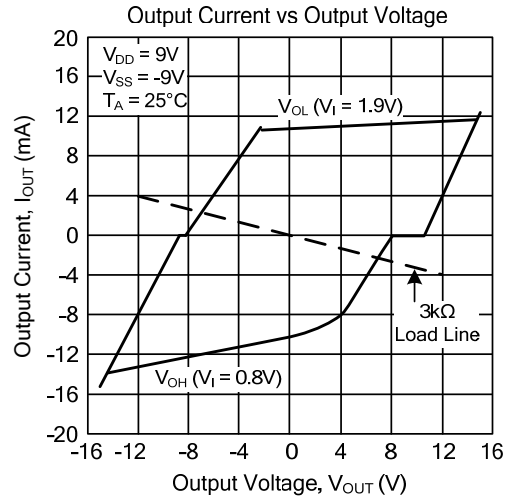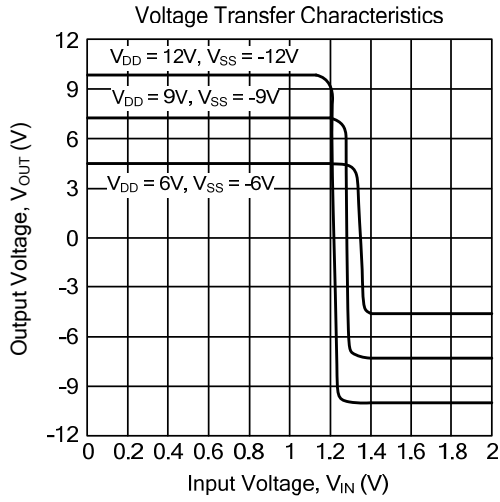

■ TYPICAL CHARACTERISTICS (RECEIVER)

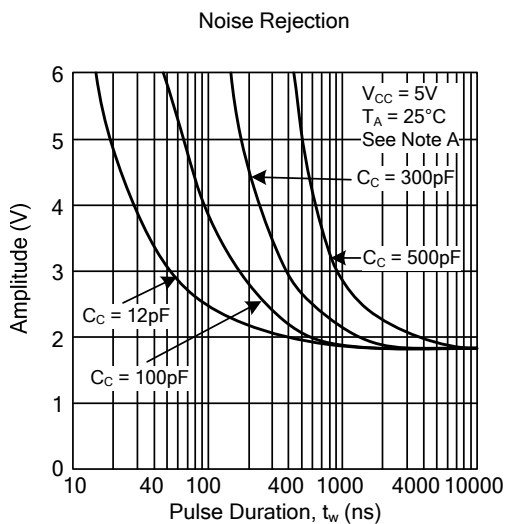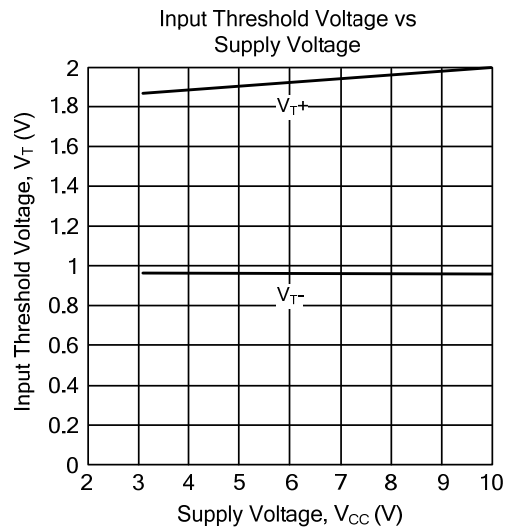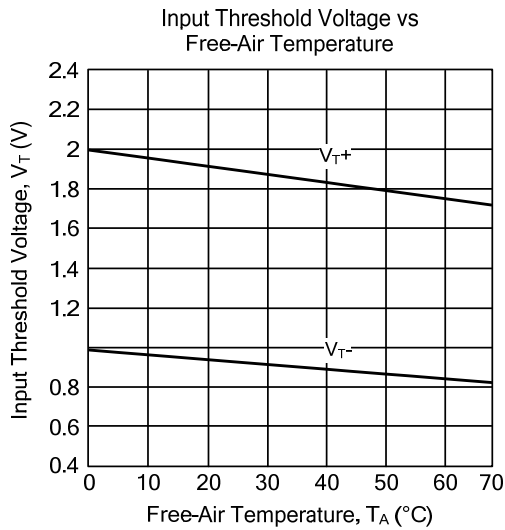

The maximum amplitude starting from 0V of a positive-going pulse that will not cause a change in the output level.

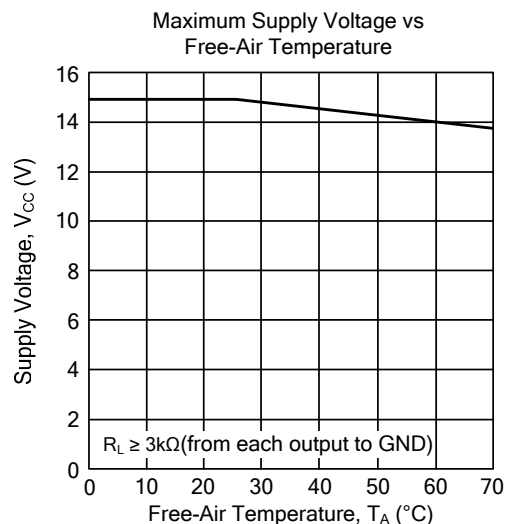

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.