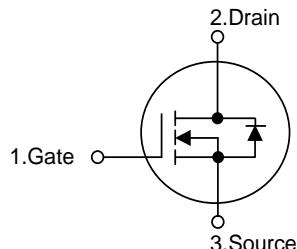


**8N65-ML****Power MOSFET****8A, 650V N-CHANNEL  
POWER MOSFET****■ DESCRIPTION**

The UTC **8N65-ML** is a high voltage power MOSFET combines advanced trench MOSFET designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and high rugged avalanche characteristics. This power MOSFET is usually used in high speed switching applications of switching power supplies and adaptors.

**■ FEATURES**

- \*  $R_{DS(ON)} \leq 1.2 \Omega$  @  $V_{GS}=10V$ ,  $I_D=4.0A$
- \* Fast switching capability
- \* Avalanche energy tested
- \* Improved dv/dt capability, high ruggedness

**■ SYMBOL****■ ORDERING INFORMATION**


Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
8N65L-TF1-T	8N65G-TF1-T	TO-220F1	G	D	S	Tube
8N65L-TF3-T	8N65G-TF3-T	TO-220F	G	D	S	Tube
8N65L-TN3-R	8N65G-TN3-R	TO-252	G	D	S	Tape Reel
8N65L-T2Q-T	8N65G-T2Q-T	TO-262	G	D	S	Tube

Note: Pin Assignment: G: Gate D: Drain S: Source

8N65G-TF1-T  
 (1)Packing Type  
 (2)Package Type  
 (3)Green Package

(1) T: Tube, R: Tape Reel  
 (2) TF1: TO-220F1, TF3: TO-220F, TN3: TO-252  
 T2Q: TO-262  
 (3) G: Halogen Free and Lead Free, L: Lead Free

## ■ MARKING

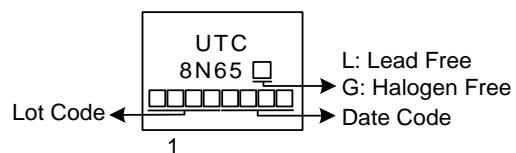

■ ABSOLUTE MAXIMUM RATINGS ( $T_C=25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT	
Drain-Source Voltage	$V_{DSS}$	650	V	
Gate-Source Voltage	$V_{GSS}$	$\pm 30$	V	
Continuous Drain Current	$I_D$	8	A	
Pulsed Drain Current (Note 2)	$I_{DM}$	16	A	
Avalanche Energy	Single Pulsed (Note 3)	$E_{AS}$	mJ	
Peak Diode Recovery $dv/dt$ (Note 4)	$dv/dt$	2.2	V/ns	
Power Dissipation	TO-220F/TO-220F1	$P_D$	36	W
	TO-252		50	W
	TO-262		130	W
Junction Temperature	$T_J$	+150	$^\circ\text{C}$	
Storage Temperature	$T_{STG}$	-55 ~ +150	$^\circ\text{C}$	

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature.

3.  $L = 10\text{mH}$ ,  $I_{AS} = 8.0\text{A}$ ,  $V_{DD} = 50\text{V}$ ,  $R_G = 25 \Omega$ , Starting  $T_J = 25^\circ\text{C}$

4.  $I_{SD} \leq 8.0\text{A}$ ,  $di/dt \leq 200\text{A}/\mu\text{s}$ ,  $V_{DD} \leq BV_{DSS}$ , Starting  $T_J = 25^\circ\text{C}$

■ THERMAL DATA

PARAMETER	SYMBOL	RATING	UNIT	
Junction to Ambient	TO-220F/TO-220F1	$\theta_{JA}$	62.5	$^\circ\text{C/W}$
	TO-262		100	$^\circ\text{C/W}$
	TO-252		3.47	$^\circ\text{C/W}$
Junction to Case	TO-220F/TO-220F1	$\theta_{JC}$	2.5 (Note)	$^\circ\text{C/W}$
	TO-252		0.96	$^\circ\text{C/W}$
	TO-262			

Note: Device mounted on FR-4 substrate PC board, 2oz copper, with 1inch square copper plate.



UNISONIC TECHNOLOGIES CO., LTD  
[www.unisonic.com.tw](http://www.unisonic.com.tw)


■ ELECTRICAL CHARACTERISTICS ( $T_J=25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>OFF CHARACTERISTICS</b>						
Drain-Source Breakdown Voltage	$\text{BV}_{\text{DSS}}$	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	650			V
Drain-Source Leakage Current	$I_{\text{DSS}}$	$V_{\text{DS}}=650\text{V}, V_{\text{GS}}=0\text{V}$		10		$\mu\text{A}$
Gate- Source Leakage Current	Forward	$V_{\text{GS}}=30\text{V}, V_{\text{DS}}=0\text{V}$		100		nA
	Reverse	$V_{\text{GS}}=-30\text{V}, V_{\text{DS}}=0\text{V}$		-100		nA
<b>ON CHARACTERISTICS</b>						
Gate Threshold Voltage	$V_{\text{GS(TH)}}$	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	2.0		4.0	V
Static Drain-Source On-State Resistance	$R_{\text{DS(ON)}}$	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=4.0\text{A}$			1.2	$\Omega$
<b>DYNAMIC CHARACTERISTICS</b>						
Input Capacitance	$C_{\text{ISS}}$	$V_{\text{DS}}=25\text{V}, V_{\text{GS}}=0\text{V}, f=1.0\text{MHz}$		1040		pF
Output Capacitance	$C_{\text{OSS}}$			114		pF
Reverse Transfer Capacitance	$C_{\text{RSS}}$			11.5		pF
<b>SWITCHING CHARACTERISTICS</b>						
Total Gate Charge (Note 1)	$Q_G$	$V_{\text{DS}}=520\text{V}, V_{\text{GS}}=10\text{V}, I_{\text{D}}=8.0\text{A}$ $I_G=1\text{mA}$ (Note 1, 2)		27		nC
Gate-Source Charge	$Q_{\text{GS}}$			6		nC
Gate-Drain Charge	$Q_{\text{GD}}$			7.8		nC
Turn-On Delay Time (Note 1)	$t_{\text{D(ON)}}$	$V_{\text{DS}}=100\text{V}, V_{\text{GS}}=10\text{V},$ $I_{\text{D}}=8.0\text{A}, R_{\text{G}}=25\Omega$ (Note 1, 2)		12		ns
Turn-On Rise Time	$t_R$			20		ns
Turn-Off Delay Time	$t_{\text{D(OFF)}}$			94		ns
Turn-Off Fall Time	$t_F$			39		ns
<b>DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS</b>						
Maximum Body-Diode Continuous Current	$I_S$				8	A
Maximum Body-Diode Pulsed Current	$I_{\text{SM}}$				16	A
Drain-Source Diode Forward Voltage (Note 1)	$V_{\text{SD}}$	$I_S=8.0\text{A}, V_{\text{GS}}=0\text{V}$			1.4	V
Reverse Recovery Time (Note 1)	$t_{\text{rr}}$	$I_S=8.0\text{A}, V_{\text{GS}}=0\text{V}$ $dI/dt=100\text{A}/\mu\text{s}$		420		ns
Reverse Recovery Charge	$Q_{\text{rr}}$			3.5		$\mu\text{C}$


Notes: 1. Pulse Test: Pulse width  $\leq 300\mu\text{s}$ , Duty cycle  $\leq 2\%$ .

2. Essentially independent of operating temperature.

## ■ TEST CIRCUITS AND WAVEFORMS

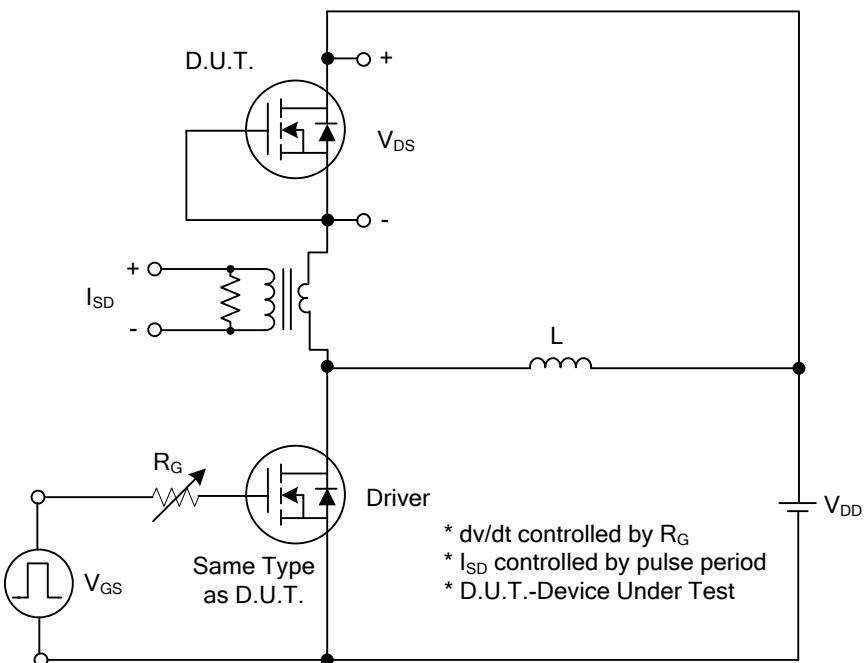


Peak Diode Recovery dv/dt Test Circuit

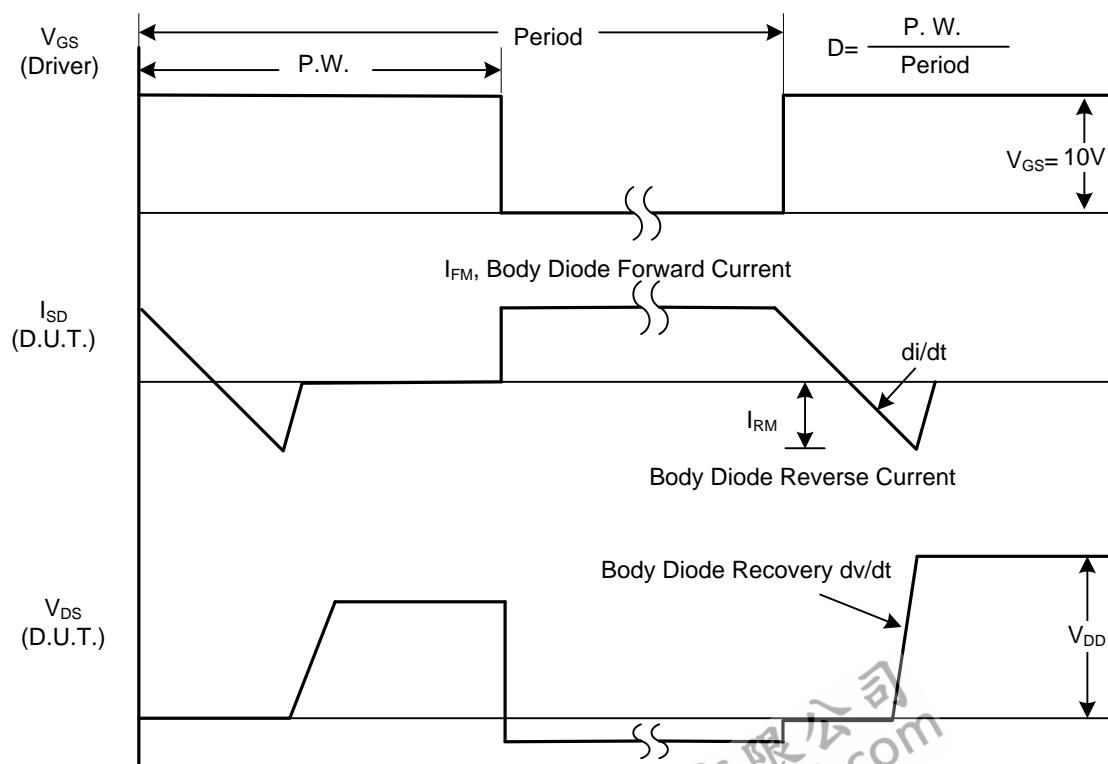


Peak Diode Recovery dv/dt Waveforms


## ■ TEST CIRCUITS AND WAVEFORMS

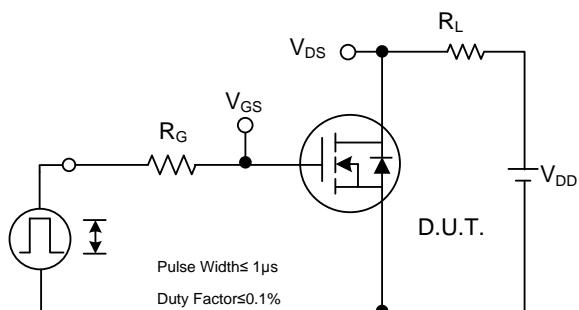


Switching Test Circuit

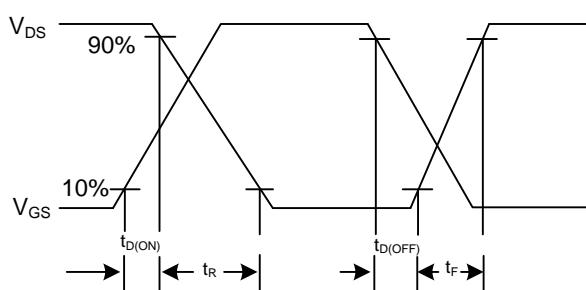


Switching Waveforms

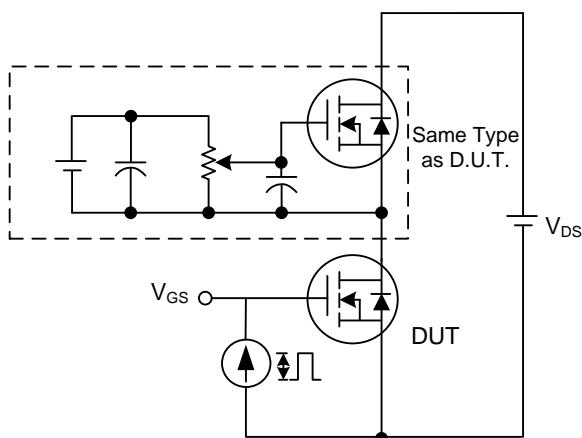


Gate Charge Test Circuit

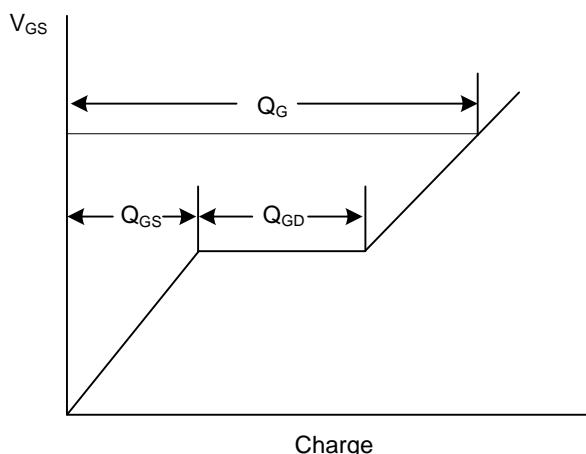

Gate Charge Waveform






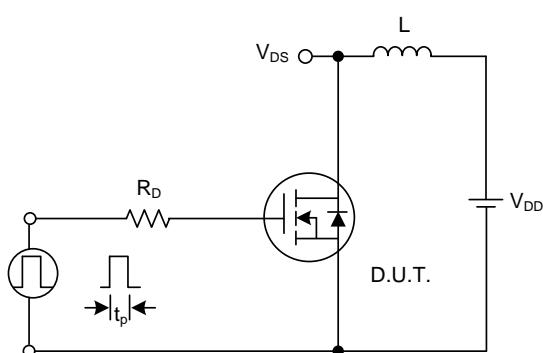


Unclamped Inductive Switching Test Circuit






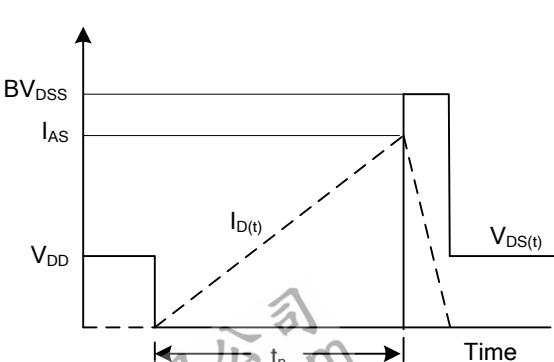



Unclamped Inductive Switching Waveforms

## ■ TYPICAL CHARACTERISTICS

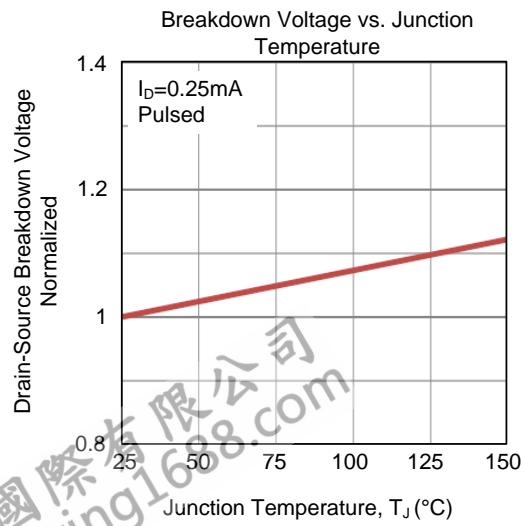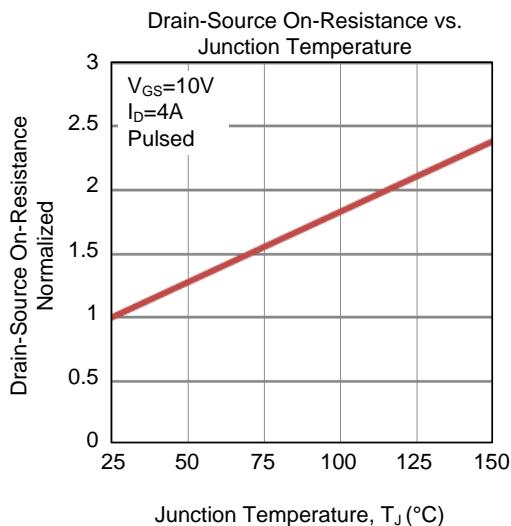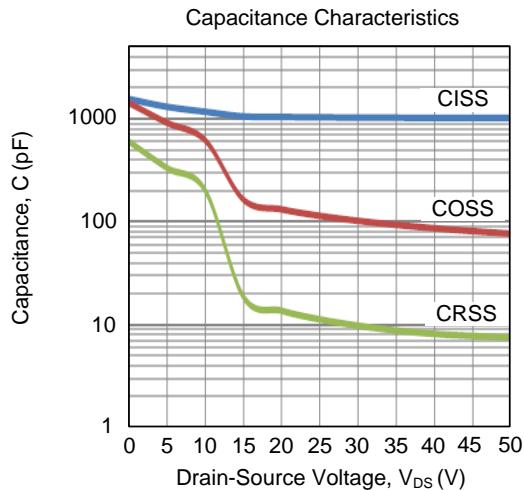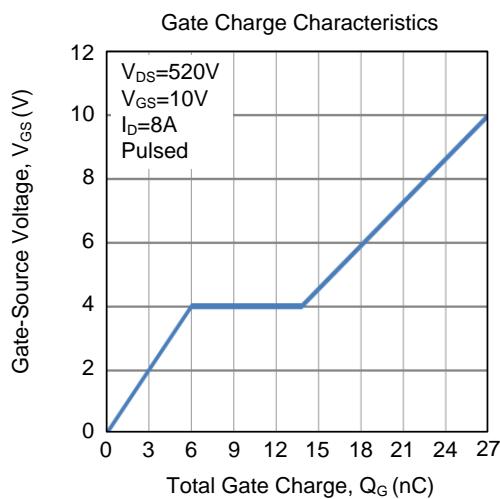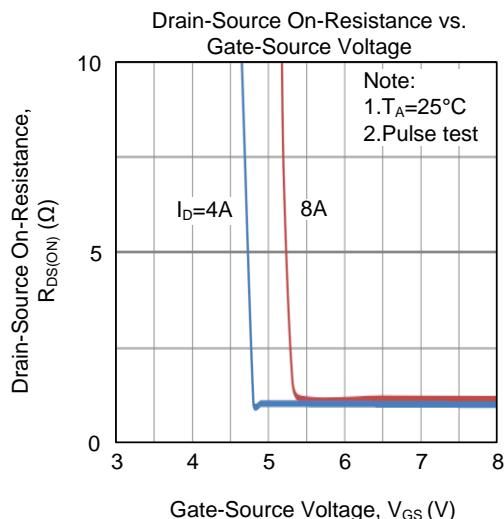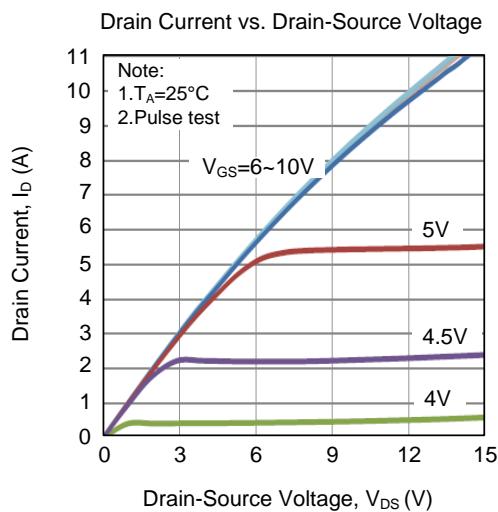

## ■ TYPICAL CHARACTERISTICS (Cont.)

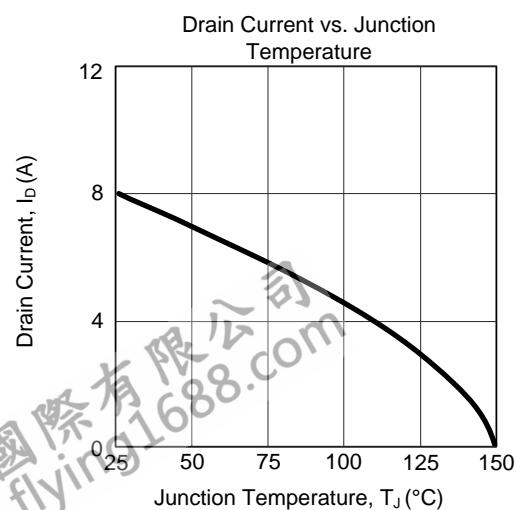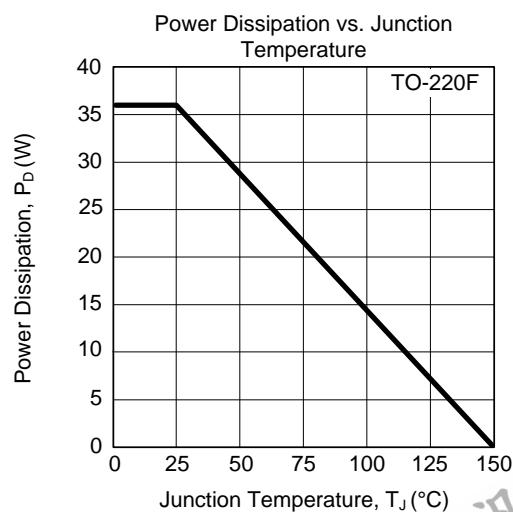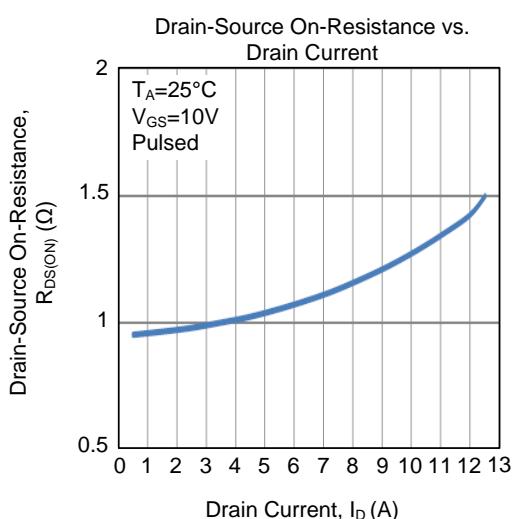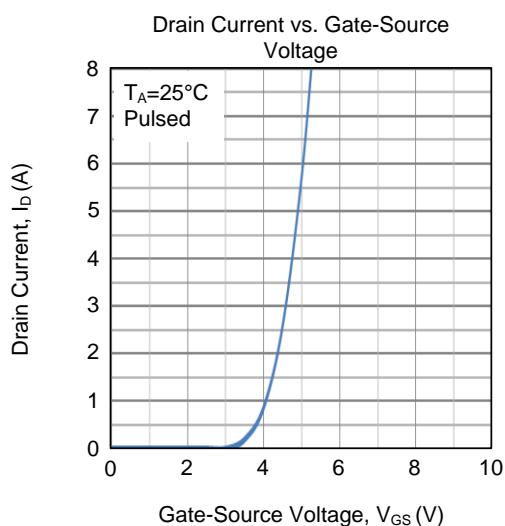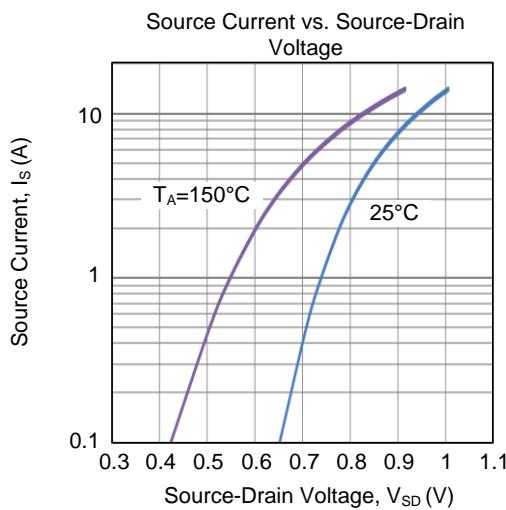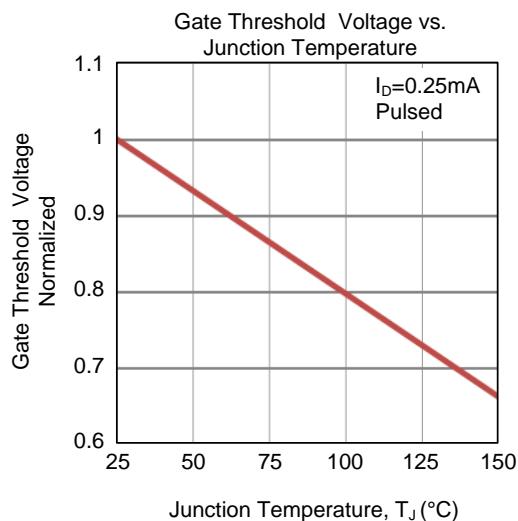

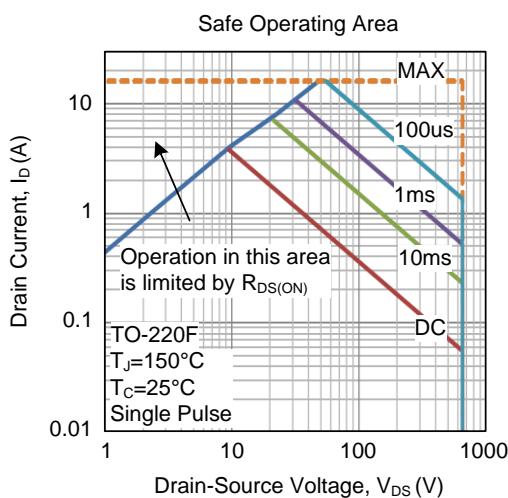**■ TYPICAL CHARACTERISTICS (Cont.)**

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.