



# 8NM65A

*Power MOSFET*

## 8.0A, 650V N-CHANNEL POWER MOSFET



■ DESCRIPTION

The UTC **8NM65A** is a high voltage super junction MOSFET and is designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and have a high rugged avalanche characteristics. This power MOSFET is usually used at high speed switching applications in switching power supplies and adaptors.

■ FEATURES

- \*  $R_{DS(ON)} < 0.72\Omega$  @  $V_{GS} = 10V, I_D = 4.0A$
- \* Fast Switching Capability
- \* Improved dv/dt Capability, High Ruggedness

■ SYMBOL

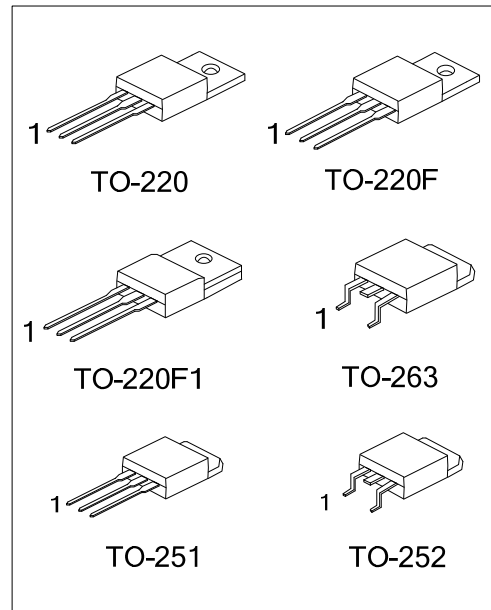


■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
8NM65AL-TA3-T	8NM65AG-TA3-T	TO-220	G	D	S	Tube
8NM65AL-TF1-T	8NM65AG-TF1-T	TO-220F1	G	D	S	Tube
8NM65AL-TF3-T	8NM65AG-TF3-T	TO-220F	G	D	S	Tube
8NM65AL-TM3-T	8NM65AG-TM3-T	TO-251	G	D	S	Tube
8NM65AL-TN3-R	8NM65AG-TN3-R	TO-252	G	D	S	Tape Reel
8NM65AL-TQ2-T	8NM65AG-TQ2-T	TO-263	G	D	S	Tube
8NM65AL-TQ2-R	8NM65AG-TQ2-R	TO-263	G	D	S	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

<p>8NM65AG-TA3-T</p>	<p>(1) T: Tube, R: Tape Reel                  (2) TA3: TO-220, TF1: TO-220F1, TF3: TO-220F, TM3: TO-251, TN3: TO-252, TQ2: TO-263                  (3) G: Halogen Free and Lead Free, L: Lead Free</p>
----------------------	--

MARKING

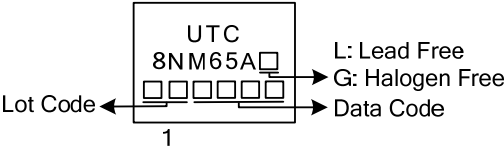

FLYING 汎翔國際有限公司  
www.flying1688.com

■ ABSOLUTE MAXIMUM RATINGS ( $T_C = 25^\circ\text{C}$ , unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		$V_{DSS}$	650	V
Gate-Source Voltage		$V_{GSS}$	$\pm 30$	V
Drain Current	Continuous	$I_D$	8.0	A
	Pulsed (Note 2)	$I_{DM}$	32	A
Avalanche Energy	Single Pulsed (Note 3)	$E_{AS}$	153.2	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	7.0	V/ns
Power Dissipation	TO-220/TO-263	$P_D$	148	W
	TO-220F/TO-220F1		48	W
	TO-251/TO-252		62	W
Junction Temperature		$T_J$	+150	$^\circ\text{C}$
Storage Temperature		$T_{STG}$	-55 ~ +150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating : Pulse width limited by maximum junction temperature.

3.  $L=60\text{mH}$ ,  $I_{AS}=2.26\text{A}$ ,  $V_{DD}=50\text{V}$ ,  $R_G=25\ \Omega$ , Starting  $T_J = 25^\circ\text{C}$

4.  $I_{SD}\leq 8.0\text{A}$ ,  $di/dt\leq 200\text{A}/\mu\text{s}$ ,  $V_{DD}\leq BV_{DSS}$ , Starting  $T_J = 25^\circ\text{C}$

■ THERMAL DATA

PARAMETER		SYMBOL	RATING	UNIT
Junction to Ambient	TO-220/ TO-220F	$\theta_{JA}$	62.5	$^\circ\text{C}/\text{W}$
	TO-220F1/TO-263			
	TO-251/TO-252			
Junction to Case	TO-220/TO-263	$\theta_{JC}$	0.84	$^\circ\text{C}/\text{W}$
	TO-220F/TO-220F1			
	TO-251/TO-252			


■ ELECTRICAL CHARACTERISTICS ( $T_c=25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>OFF CHARACTERISTICS</b>						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	650			V
Drain-Source Leakage Current	$I_{DSS}$	$V_{DS} = 650V, V_{GS} = 0V$			1	$\mu A$
Gate- Source Leakage Current	Forward	$I_{GSS}$			100	nA
	Reverse				-100	nA
<b>ON CHARACTERISTICS</b>						
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.5		4.5	V
Static Drain-Source On-State Resistance	$R_{DS(ON)}$	$V_{GS} = 10V, I_D = 4.0A$			0.72	$\Omega$
<b>DYNAMIC CHARACTERISTICS</b>						
Input Capacitance	$C_{ISS}$	$V_{DS}=25V, V_{GS}=0V, f=1.0\text{ MHz}$		472		pF
Output Capacitance	$C_{OSS}$			279		pF
Reverse Transfer Capacitance	$C_{RSS}$			22		pF
<b>SWITCHING PARAMETERS</b>						
Total Gate Charge (Note 1)	$Q_G$	$V_{DS}=50V, V_{GS}=10V, I_D=1.3A,$ $I_G=100\mu A$ (Note 1, 2)		19.8		nC
Gate to Source Charge	$Q_{GS}$			4.8		nC
Gate to Drain Charge	$Q_{GD}$			9.0		nC
Turn-on Delay Time (Note 1)	$t_{D(ON)}$	$V_{DD}=30V, V_{GS}=10V, I_D=0.5A,$ $R_G=25\Omega$ (Note 1, 2)		43		ns
Rise Time	$t_R$			73		ns
Turn-off Delay Time	$t_{D(OFF)}$			166		ns
Fall-Time	$t_F$			63		ns
<b>SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS</b>						
Maximum Body-Diode Pulsed Current	$I_S$				8	A
Drain-Source Diode Forward Voltage (Note 1)	$I_{SM}$				32	A
Maximum Body-Diode Continuous Current	$V_{SD}$	$I_S=8.0A, V_{GS}=0V$			1.4	V
Reverse Recovery Time (Note 1)	$t_{rr}$	$I_S=8.0A, V_{GS}=0V$ $di/dt=100A/\mu s$		312		ns
Reverse Recovery Charge	$Q_{rr}$			3.69		$\mu C$


Notes: 1. Pulse Test: Pulse width  $\leq 300\mu s$ , Duty cycle  $\leq 2\%$ .

2. Essentially independent of operating temperature.

■ TEST CIRCUITS AND WAVEFORMS

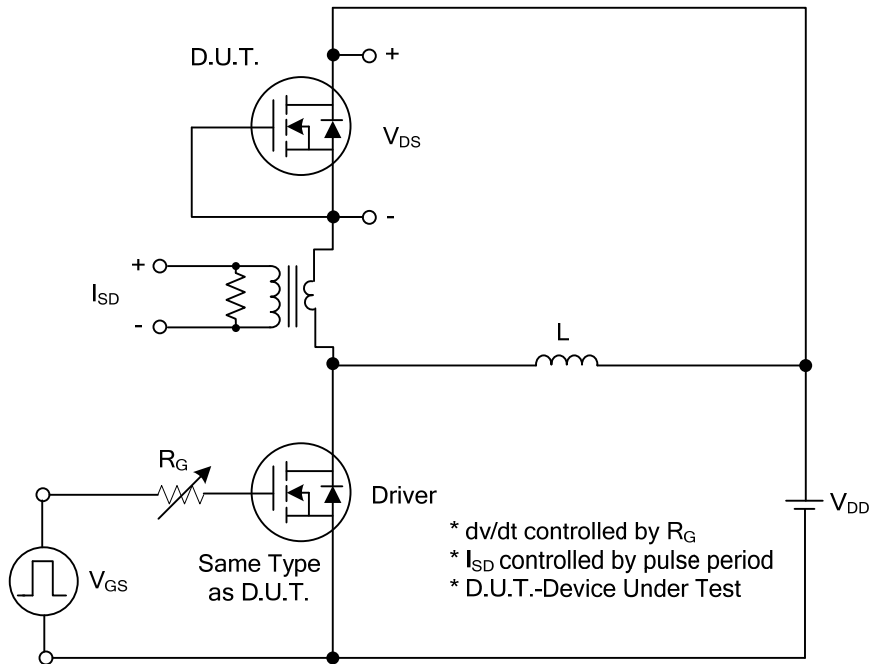


Peak Diode Recovery dv/dt Test Circuit

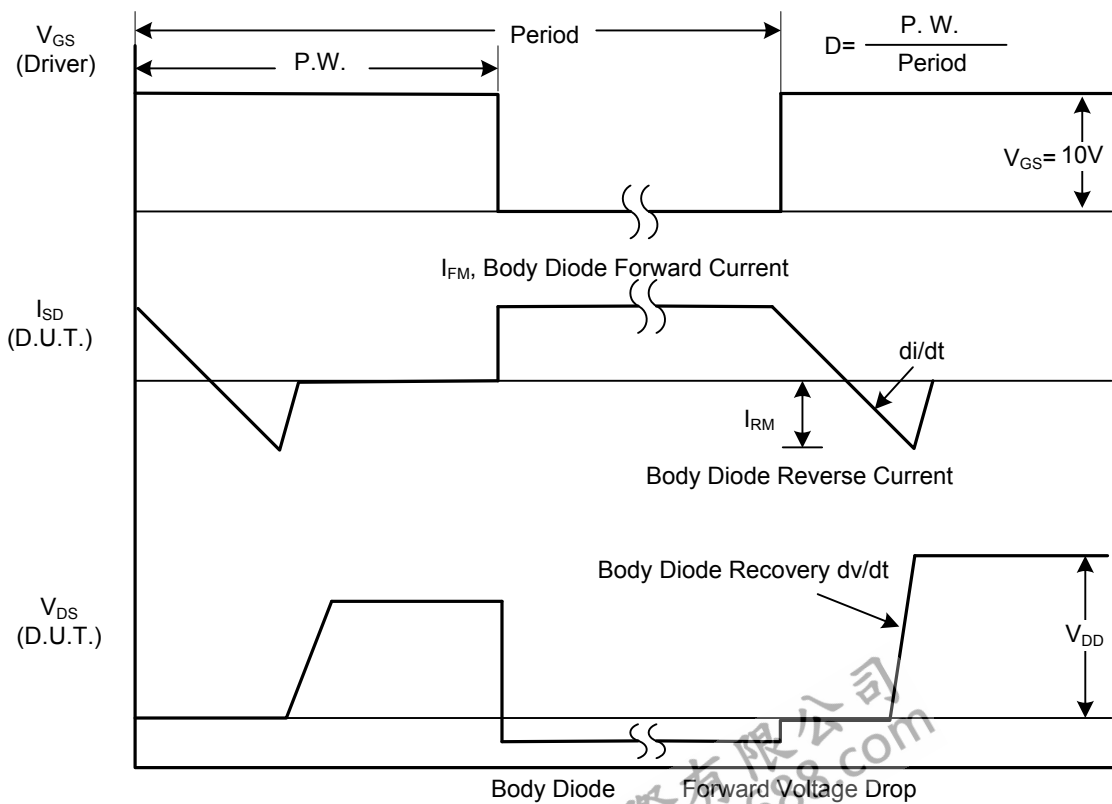


Peak Diode Recovery dv/dt Waveforms


### TEST CIRCUITS AND WAVEFORMS (Cont.)

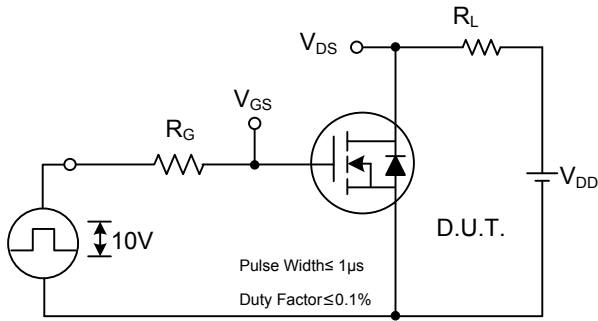


Switching Test Circuit

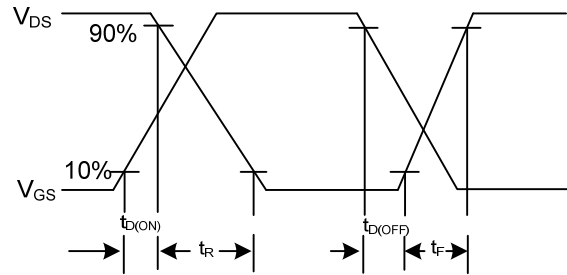


Switching Waveforms

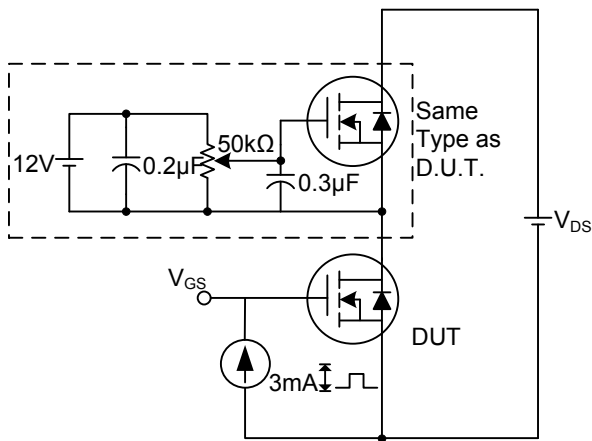


Gate Charge Test Circuit

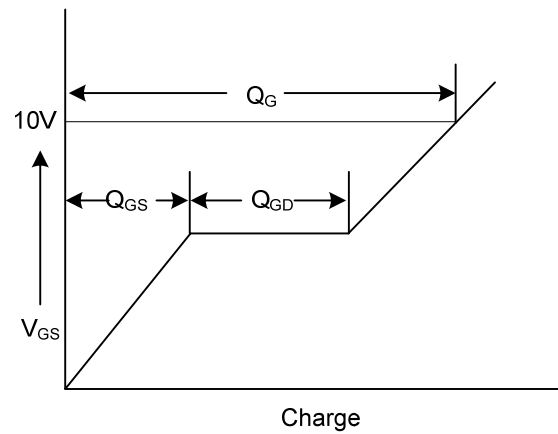

Gate Charge Waveform

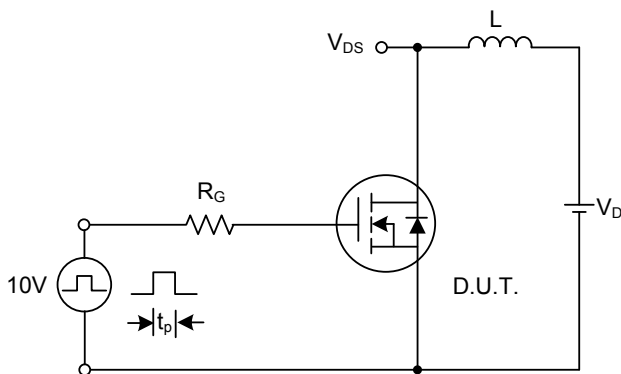

Unclamped Inductive Switching Test Circuit

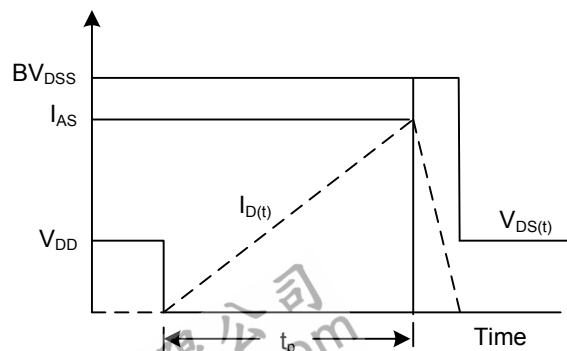

Unclamped Inductive Switching Waveforms

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.