



Specification for Approval

- DEVICE NUMBER: BL-HZD32X-N

SAMPLES
ATTACHED AREA

| DATE \ PAGE | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | CONTENTS |
|-------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------------------|
| 2018/3/29 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | Initial Released |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |

FOR CUSTOMER'S APPROVAL STAMP OR SIGNATURE

| APPROVED | PURCHASE | MANUFACTURE | QUALITY | ENGINEERING |
|----------|----------|-------------|---------|-------------|
| | | | | |

佰鴻工業股份有限公司
 BRIGHT LED ELECTRONICS CORP.
 新北市板橋區和平路 19 號 3 樓
 3F., No.19, He Ping Road,
 Ban Qiao Dist., New Taipei City,
 Taiwan
 Tel: +886-2-29591090
 Fax: +886-2-29547006/29558809
www.brtled.com

| ISSUED | APPROVED | PREPARED |
|--------|----------|----------|
| 張孝嚴 | 陳悌帆 | 熊燦芬 |


● Features:

1. Emitted Color: White.
CCT: 3700-5400K
2. Lens Appearance: Yellow diffuse.
3. 3.5x2.8x1.9mm standard package.
4. Suitable for all SMT assembly methods.
5. Compatible with infrared and vapor phase reflow solder process.
6. Compatible with automatic placement equipment.
7. This product doesn't contain restriction Substance, comply ROHS standard.

● Applications:

1. Automotive: Dashboards, stop lamps turn signals.
2. Backlighting: LCDs, Key pads advertising.
3. Status indicators: Consumer & industrial electronics.
4. General use.

● Package Dimensions:

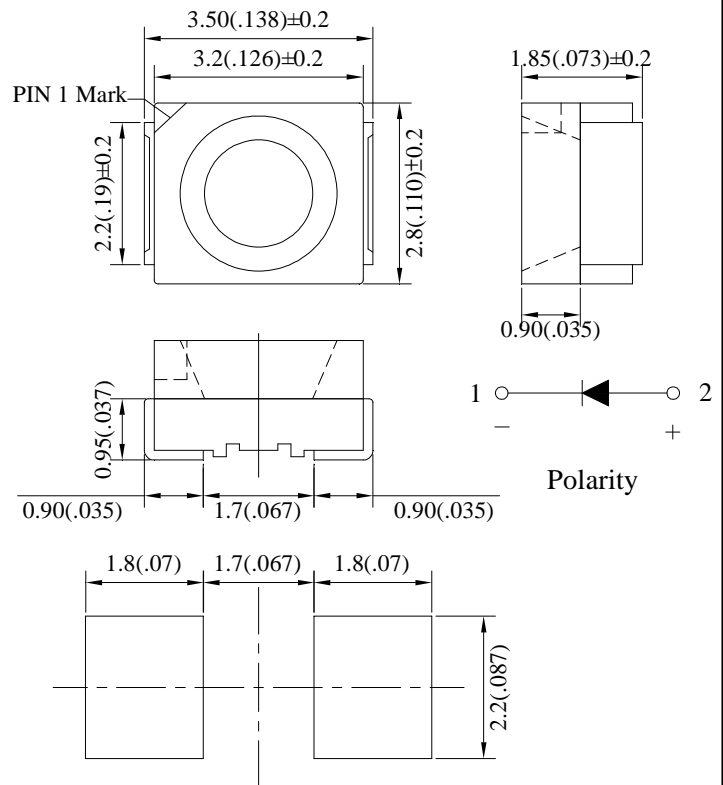

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.10mm (0.004") unless otherwise specified.

● Absolute Maximum Ratings(Ta=25°C)







| Parameter | Symbol | Rating | Unit |
|------------------------|-----------------|---------------|------|
| Power Dissipation | Pd | 100 | mW |
| Forward Current | I _F | 30 | mA |
| Peak Forward Current*1 | I _{FP} | 100 | mA |
| Reverse Voltage | V _R | 5 | V |
| Operating Temperature | Topr | -40°C ~ 85°C | - |
| Storage Temperature | Tstg | -40°C ~ 100°C | - |
| Soldering Temperature | Tsol | See Page 8 | - |

*1 Condition for I_{FP} is pulse of 1/10 duty and 3 msec width.


● Electrical and optical characteristics(Ta=25°C)

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|----------------------------|-------------------|----------------------|------|------|------|------|
| Forward Voltage | V _f | I _F =20mA | 2.7 | 2.9 | 3.3 | V |
| Luminous Intensity | I _v | I _F =20mA | 2600 | 3000 | - | mcd |
| Chromaticity Coordinates | x | I _F =20mA | - | 0.37 | - | - |
| | y | I _F =20mA | - | 0.37 | - | |
| Reverse Current | I _R | V _R =5V | - | - | 10 | μA |
| Viewing Angle | 2θ _{1/2} | I _F =20mA | - | 120 | - | deg |
| Color rendering index(CRI) | CRI | I _F =20mA | - | 70 | - | - |

● Typical Electro-Optical Characteristics Curves

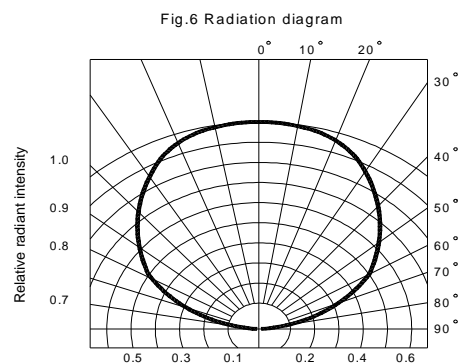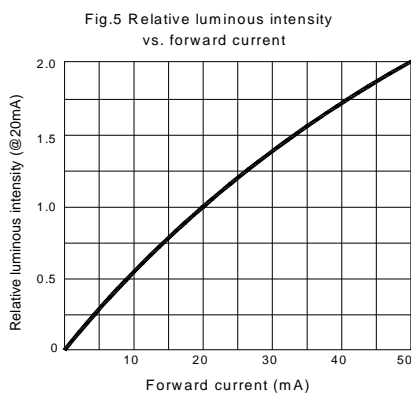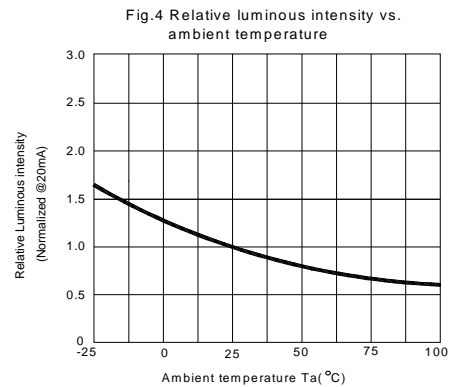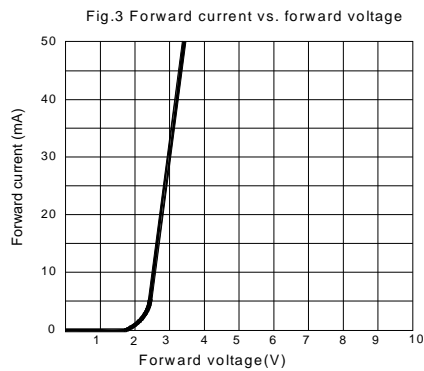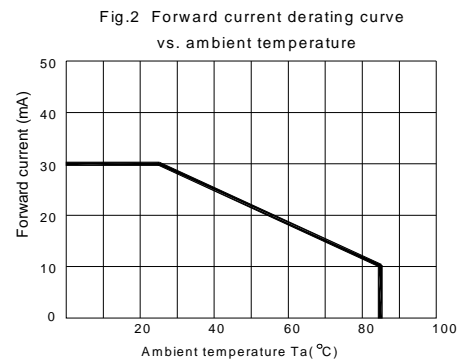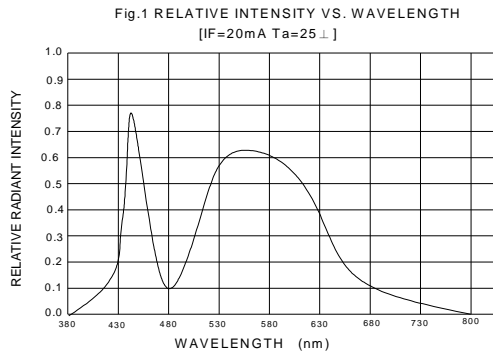


● Tapping and packaging specifications(Units: mm)

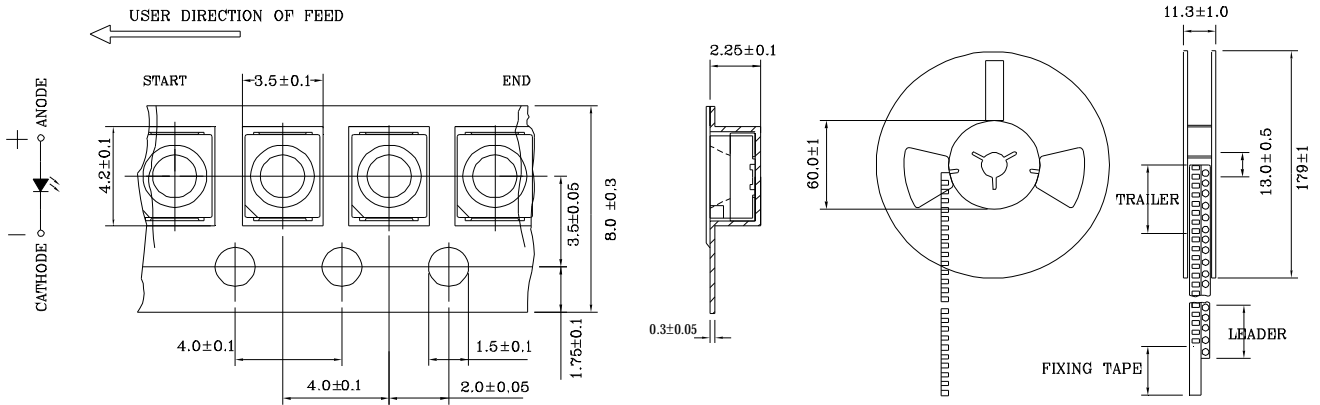

NOTE:2000 PCS PER REEL

● Package Method:(unit:mm)

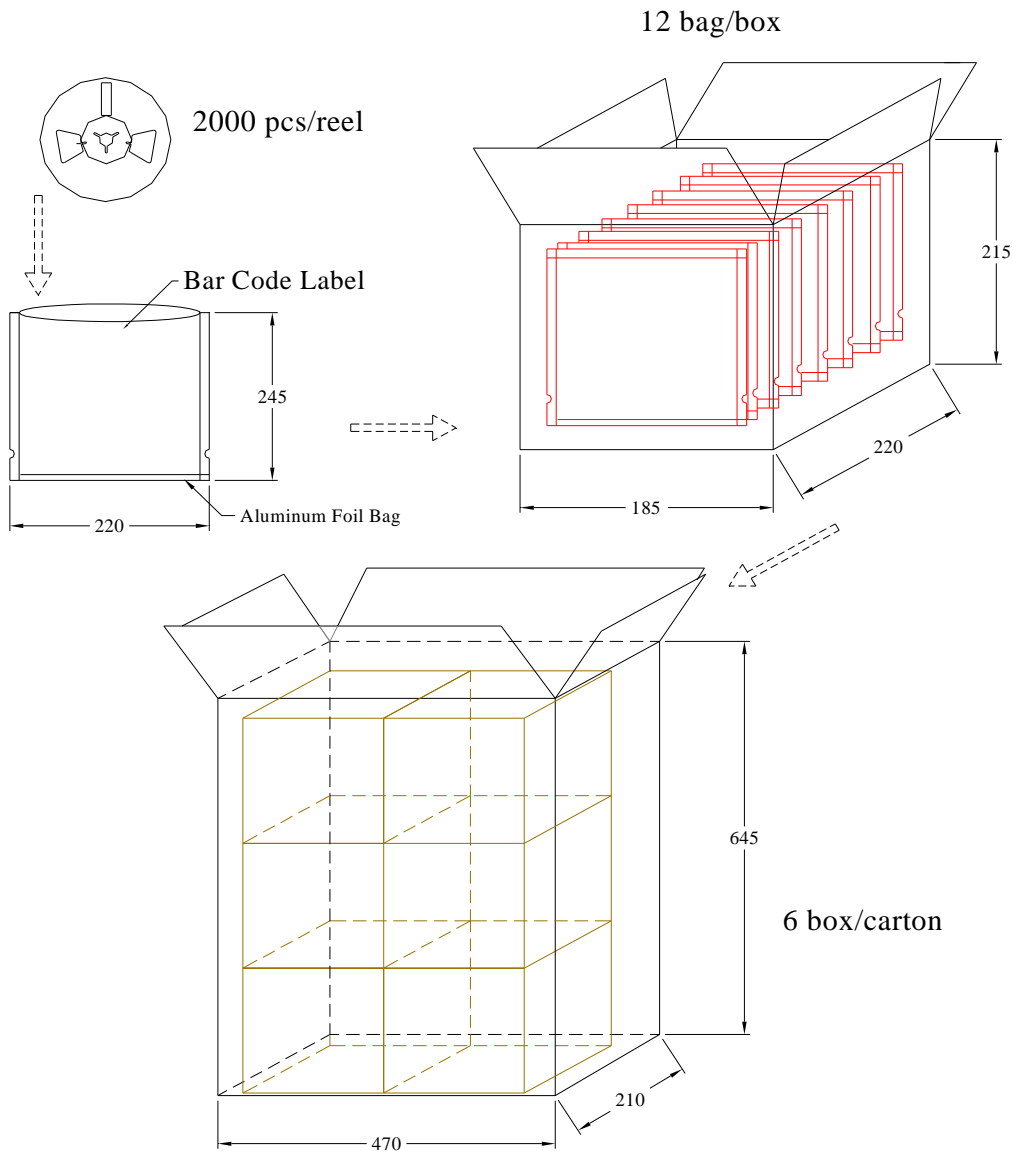

● Bin Limits


Intensity Bin Limits (At 20mA)

| BIN CODE | Min. (mcd) | Max. (mcd) |
|----------|------------|------------|
| Y2 | 2600 | 2750 |
| Y3 | 2750 | 2900 |
| Y4 | 2900 | 3050 |
| Y5 | 3050 | 3250 |
| Y6 | 3250 | 3450 |
| Y7 | 3450 | 3650 |
| Z1 | 3650 | 3850 |

VF Bin Limits (At 20mA)

| BIN CODE | Min.(v) | Max.(v) |
|----------|---------|---------|
| F2 | 2.7 | 2.8 |
| G1 | 2.8 | 2.9 |
| G2 | 2.9 | 3.0 |
| H1 | 3.0 | 3.1 |
| H2 | 3.1 | 3.2 |
| J1 | 3.2 | 3.3 |


Color Bin Limits (At 20mA)

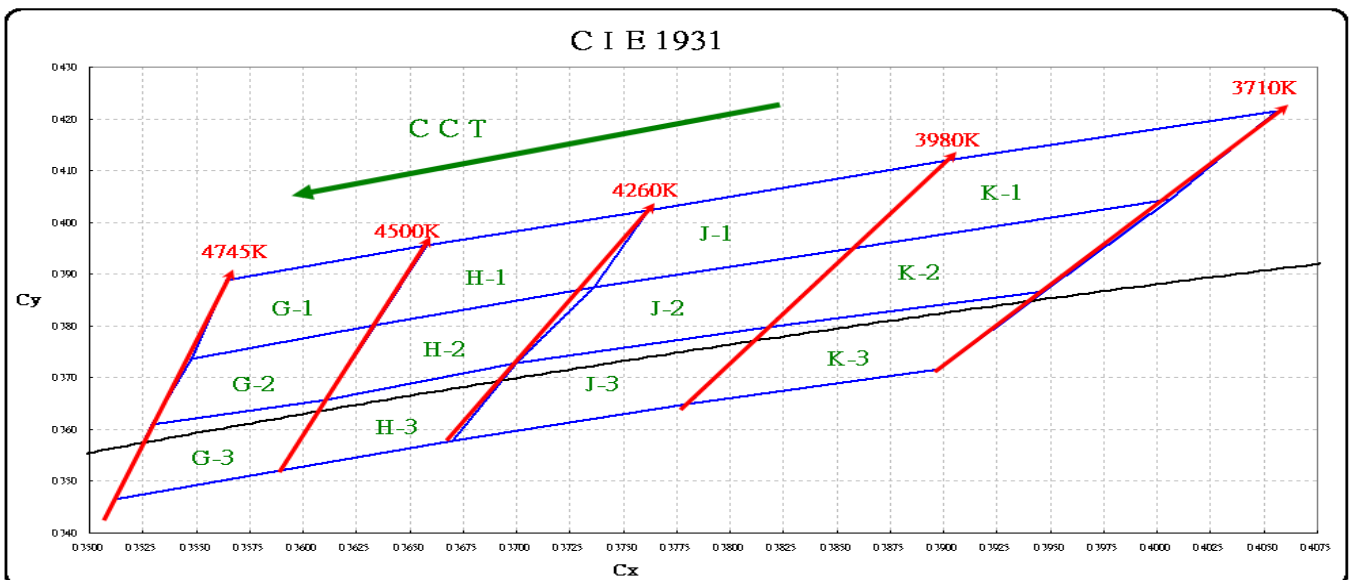

Color Bin Limits (At 20mA)

| BIN | CCT(K) | | Chromaticity Coordinates | | | | | |
|-----|-----------------------|------------|--------------------------|--------|--------|--------|--------|--------|
| | | | x | y | z | u | v | |
| G-1 | 4500K (4260-4745K) | 4500-4745K | x | 0.3634 | 0.3548 | 0.3564 | 0.3658 | 0.3634 |
| | | | y | 0.3801 | 0.3736 | 0.3888 | 0.3956 | 0.3801 |
| G-2 | | | x | 0.3611 | 0.3529 | 0.3548 | 0.3634 | 0.3611 |
| | | | y | 0.3658 | 0.3609 | 0.3736 | 0.3801 | 0.3658 |
| G-3 | | x | 0.3589 | 0.3512 | 0.3529 | 0.3611 | 0.3589 | |
| | | y | 0.3520 | 0.3465 | 0.3609 | 0.3658 | 0.3520 | |
| H-1 | | 4260-4500K | x | 0.3736 | 0.3634 | 0.3658 | 0.3762 | 0.3736 |
| | | | y | 0.3874 | 0.3801 | 0.3956 | 0.4024 | 0.3874 |
| H-2 | | | x | 0.3700 | 0.3611 | 0.3634 | 0.3736 | 0.3700 |
| | | | y | 0.3728 | 0.3658 | 0.3801 | 0.3874 | 0.3728 |
| H-3 | x | | 0.3670 | 0.3589 | 0.3611 | 0.3700 | 0.3670 | |
| | y | | 0.3578 | 0.3520 | 0.3658 | 0.3728 | 0.3578 | |
| J-1 | 4000K (3710-4260K) | 3980-4260K | x | 0.3780 | 0.3670 | 0.3700 | 0.3818 | 0.3780 |
| | | | y | 0.3649 | 0.3578 | 0.3728 | 0.3797 | 0.3649 |
| J-2 | | | x | 0.3818 | 0.3700 | 0.3736 | 0.3857 | 0.3818 |
| | | | y | 0.3797 | 0.3728 | 0.3874 | 0.3949 | 0.3797 |
| J-3 | | | x | 0.3857 | 0.3736 | 0.3762 | 0.3902 | 0.3857 |
| | | | y | 0.3949 | 0.3874 | 0.4024 | 0.4120 | 0.3949 |
| K-1 | 3710-3980K | x | 0.4006 | 0.3857 | 0.3902 | 0.4056 | 0.4006 | |
| | | y | 0.4044 | 0.3949 | 0.4120 | 0.4215 | 0.4044 | |
| K-2 | | x | 0.3947 | 0.3818 | 0.3857 | 0.4006 | 0.3947 | |
| | | y | 0.3867 | 0.3797 | 0.3949 | 0.4044 | 0.3867 | |
| K-3 | | x | 0.3898 | 0.3780 | 0.3818 | 0.3947 | 0.3898 | |
| | | y | 0.3716 | 0.3649 | 0.3797 | 0.3867 | 0.3716 | |

CCT : Tolerance for each Bin limit is $\pm 100K$

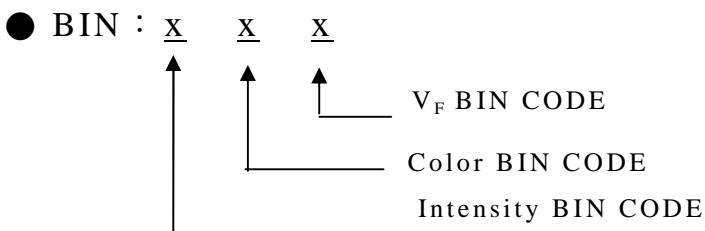

Notes:

1. I_v : Tolerance for each Bin limit is $\pm 10\%$
2. Color : Tolerance for each Bin limit is ± 0.005
3. V_F : Tolerance for each Bin limit is $\pm 0.05V$
4. Bin categories are established for classification of products.
Products may not be available in all bin categories.

● Reliability Test

| Classification | Test Item | Reference Standard | Test Conditions | Result |
|--------------------|--|---|---|--------|
| Endurance Test | Operation Life | MIL-STD-750:1026 MIL-STD-883:1005 JIS-C-7021 :B-1 | $I_F=20\text{mA}$ $T_a=\text{Under room temperature}$ Test time=1,000hrs | 0/20 |
| | High Temperature High Humidity Storage | MIL-STD-202:103B JIS-C-7021 :B-11 | $T_a=+65^\circ\text{C}\pm 5^\circ\text{C}$ RH=90%-95% Test time=240hrs | 0/20 |
| | High Temperature Storage | MIL-STD-883:1008 JIS-C-7021 :B-10 | High $T_a=+85^\circ\text{C}\pm 5^\circ\text{C}$ Test time=1,000hrs | 0/20 |
| | Low Temperature Storage | JIS-C-7021 :B-12 | Low $T_a=-35^\circ\text{C}\pm 5^\circ\text{C}$ Test time=1,000hrs | 0/20 |
| Environmental Test | Temperature Cycling | MIL-STD-202:107D MIL-STD-750:1051 MIL-STD-883:1010 JIS-C-7021 :A-4 | $-35^\circ\text{C} \sim +25^\circ\text{C} \sim +85^\circ\text{C} \sim +25^\circ\text{C}$ 60min 20min 60min 20min Test Time=5cycle | 0/20 |
| | Thermal Shock | MIL-STD-202:107D MIL-STD-750:1051 MIL-STD-883:1011 | $-35^\circ\text{C}\pm 5^\circ\text{C} \sim +85^\circ\text{C}\pm 5^\circ\text{C}$ 20min 20min Test Time=10cycle | 0/20 |
| | Solder Resistance | MIL-STD-202:201A MIL-STD-750:2031 JIS-C-7021 :A-1 | Preheating : 140°C-160°C, within 2 minutes. Operation heating : 260°C (Max.), within 10seconds. (Max.) | 0/20 |


● Judgment criteria of failure for the reliability

| Measuring items | Symbol | Measuring conditions | Judgment criteria for failure |
|--------------------|--------------|----------------------|-------------------------------|
| Forward voltage | V_F (V) | $I_F=20\text{mA}$ | Over $U^1 \times 1.2$ |
| Reverse current | I_R (uA) | $V_R=5\text{V}$ | Over $U^1 \times 2$ |
| Luminous intensity | I_v (mcd) | $I_F=20\text{mA}$ | Below $S^1 \times 0.5$ |

Note: 1. U means the upper limit of specified characteristics. S means initial value.

2. After each test, remove test pieces; wait for 2 hours and test pieces have returned to ambient temperature, then take next measurement.

●IR-Reflow

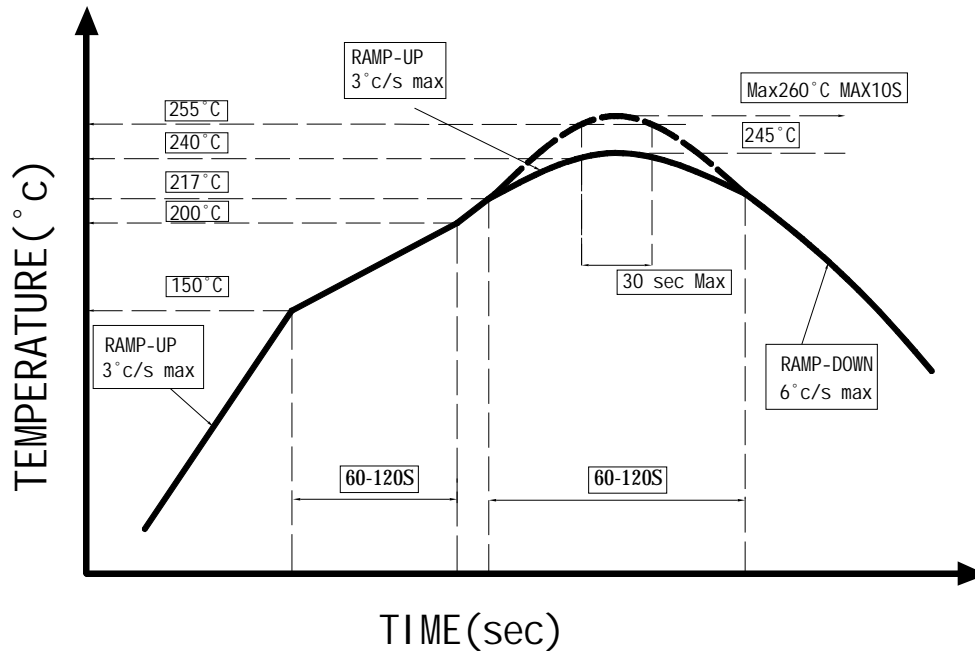

- 1、 Avoid any external stress applied to the resin while the LEDs are at high temperature, especially during soldering.
- 2、 Avoid rapid cooling or any excess vibration during temperature ramp-down process
- 3、 Although the soldering condition is recommended above, soldering at the lowest possible temperature is feasible for the LEDs

●IRON Soldering


350°C Within 3 sec, one time only.

Handling Precautions


Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force.

As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.


1. Handle the component along the side surfaces by using forceps or appropriate tools. (pic.1)
2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry. (pic.2, pic.3)
3. Do not stack together assembled PCBs, containing exposed LEDs. Impact may scratch the silicone lens or damage the internal circuitry. (pic.4)
4. The outer diameter of the SMD pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible. (pic.5)
5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup. (pic.5)
6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production. (pic.5)




Pic.1




Pic.2



Pic.3



Pic.4

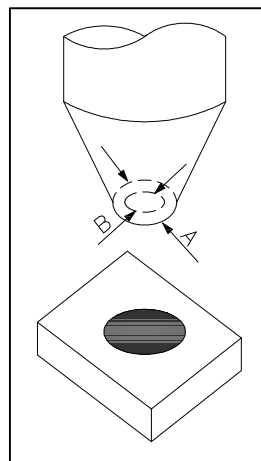

Pic.5

● Notes for designing:

Care must be taken to provide the current limiting resistor in the circuit so as to drive the LEDs within the rated figures. Also, caution should be taken not to overload LEDs with instantaneous voltage at the turning ON and OFF of the circuit.

When using the pulse drive care must be taken to keep the average current within the rated figures. Also, the circuit should be designed so as to be subjected to reverse voltage when turning off the LEDs.

● Storage:

In order to avoid the absorption of moisture, it is recommended to solder LEDs as soon as possible after unpacking the sealed envelope.

If the envelope is still packed, to store it in the environment as following:

- (1) Temperature : 5°C-30°C(41°F) Humidity : RH 60% Max.
- (2) After this bag is opened, devices that will be applied to infrared reflow, vapor-phase reflow, or equivalent soldering process must be:
 - a. Completed within 168 hours.
 - b. Stored at less than 30% RH.
- (3) Devices require baking before mounting, if:
 - 2a or 2b is not met.
- (4) If baking is required, devices must be baked under below conditions:
 - 48 hours at 60°C±3°C.

● Package and Label of Products:

- (1) Package: Products are packed in one bag of 2000 pcs (one taping reel) and a label is attached to each bag.
- (2) Label:

