



Specification for Approval

- DEVICE NUMBER: BL-HZD39B-C
- CUSTOMER:

**SAMPLES
ATTACHED AREA**

| DATE | PAGE | | | | | | | | | | CONTENTS |
|-----------|------|-----|-----|-----|-----|-----|-----|-----|-----|--|------------------|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | |
| 2019/1/15 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | | Initial Released |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |

FOR CUSTOMER'S APPROVAL STAMP OR SIGNATURE

| APPROVED | PURCHASE | MANUFACTURE | QUALITY | ENGINEERING |
|----------|----------|-------------|---------|-------------|
| | | | | |

佰鴻工業股份有限公司
 BRIGHT LED ELECTRONICS CORP.
 新北市板橋區和平路 19 號 3 樓
 3F., No.19, He Ping Road,
 Ban Qiao Dist., New Taipei City,
 Taiwan
 Tel: +886-2-29591090
 Fax: +886-2-29547006/29558809
www.brtled.com

| ISSUED | APPROVED | PREPARED |
|--------|----------|----------|
| 張孝嚴 | 謝皓翔 | 熊燦芬 |


● Features:

1. Emitted Color : Cool White
2. Lens Appearance: Yellow diffuse.
3. (4.0x0.8x1.4mm) standard package
4. Suitable for all SMT assembly methods.
5. Compatible with infrared and vapor phase reflow solder process.
6. Compatible with automatic placement equipment.
7. This product doesn't contain restriction Substance, comply ROHS standard.

● Applications:

1. Automotive : Dashboards, stop lamps, turn signals.
2. Backlighting : LCDs.
3. Status indicators : Consumer & industrial electronics.
4. General use.

● Package Dimensions:

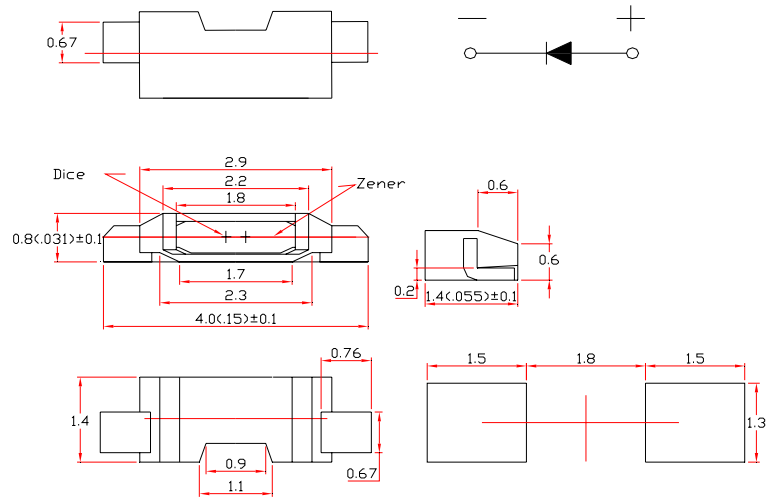

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.10\text{mm}$ (0.004") unless otherwise specified.
3. Specifications are subject to change without notice.

● Absolute Maximum Ratings($T_a=25^\circ\text{C}$)







| Parameter | Symbol | Rating | Unit |
|--------------------------|----------|-----------|------------------|
| Power Dissipation | Pd | 96 | mW |
| Forward Current | I_F | 30 | mA |
| Peak Forward Current * 1 | I_{FP} | 100 | mA |
| Operating Temperature | Topr | -40~85 | $^\circ\text{C}$ |
| Storage Temperature | Tstg | -40~85 | $^\circ\text{C}$ |
| Soldering Temperature | Tsol | See Page7 | - |

* 1 Condition for I_{FP} is pulse of 1/10 duty and 30 msec width.


● Electrical and optical characteristics(Ta=25°C)

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|--------------------------|-------------------|-----------------------|------|------|------|------|
| Forward Voltage | VF | I _F =20mA | - | 2.9 | - | V |
| Luminous Intensity | I _v | I _F =20 mA | | 2200 | - | mcd |
| Chromaticity Coordinates | x | I _F =20 mA | 0.24 | 0.25 | 0.27 | - |
| | y | I _F =20 mA | 0.21 | 0.25 | 0.28 | - |
| Reverse Current | I _R | VR=5V | - | - | 10 | μA |
| Viewing Angle | 2θ _{1/2} | I _F =20 mA | - | 120 | - | deg |


● Typical Electro-Optical Characteristics Curves

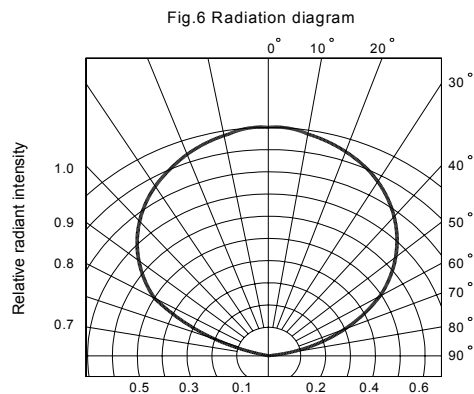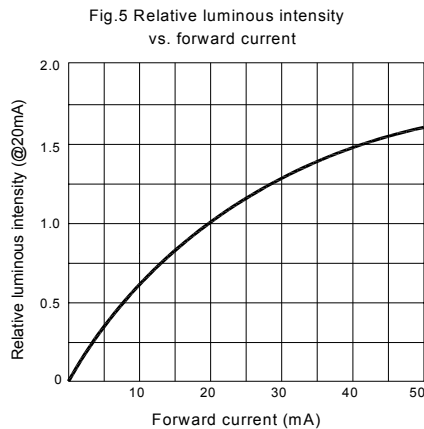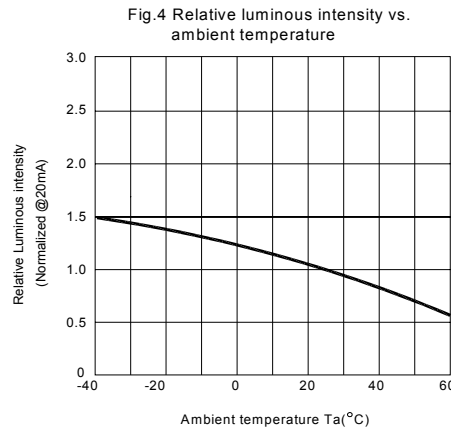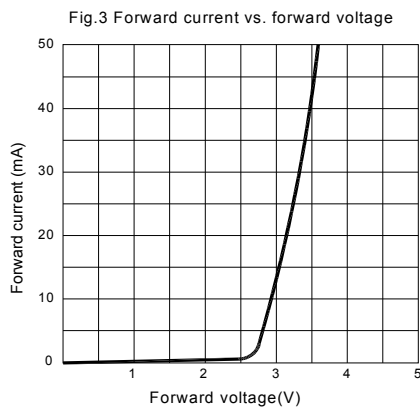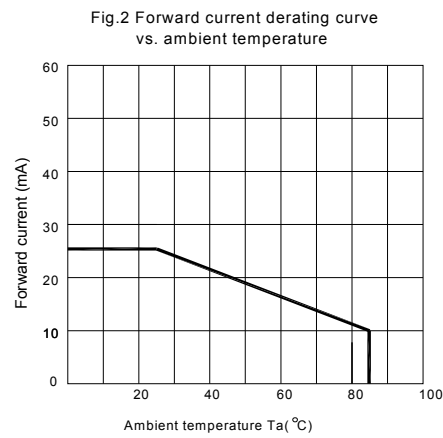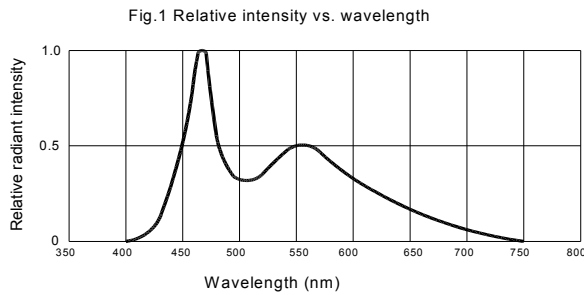

● Tapping and packaging specifications(Units: mm)

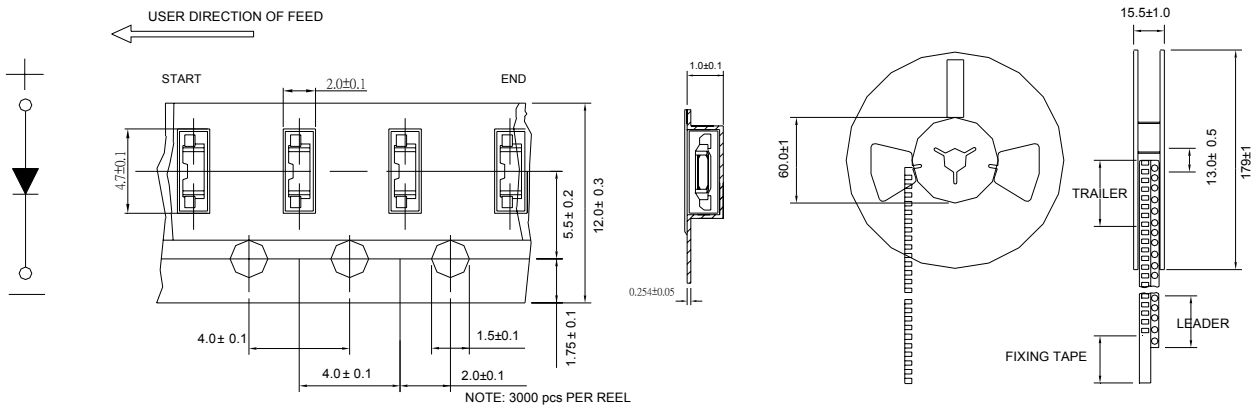

● Package Method(Units: mm)

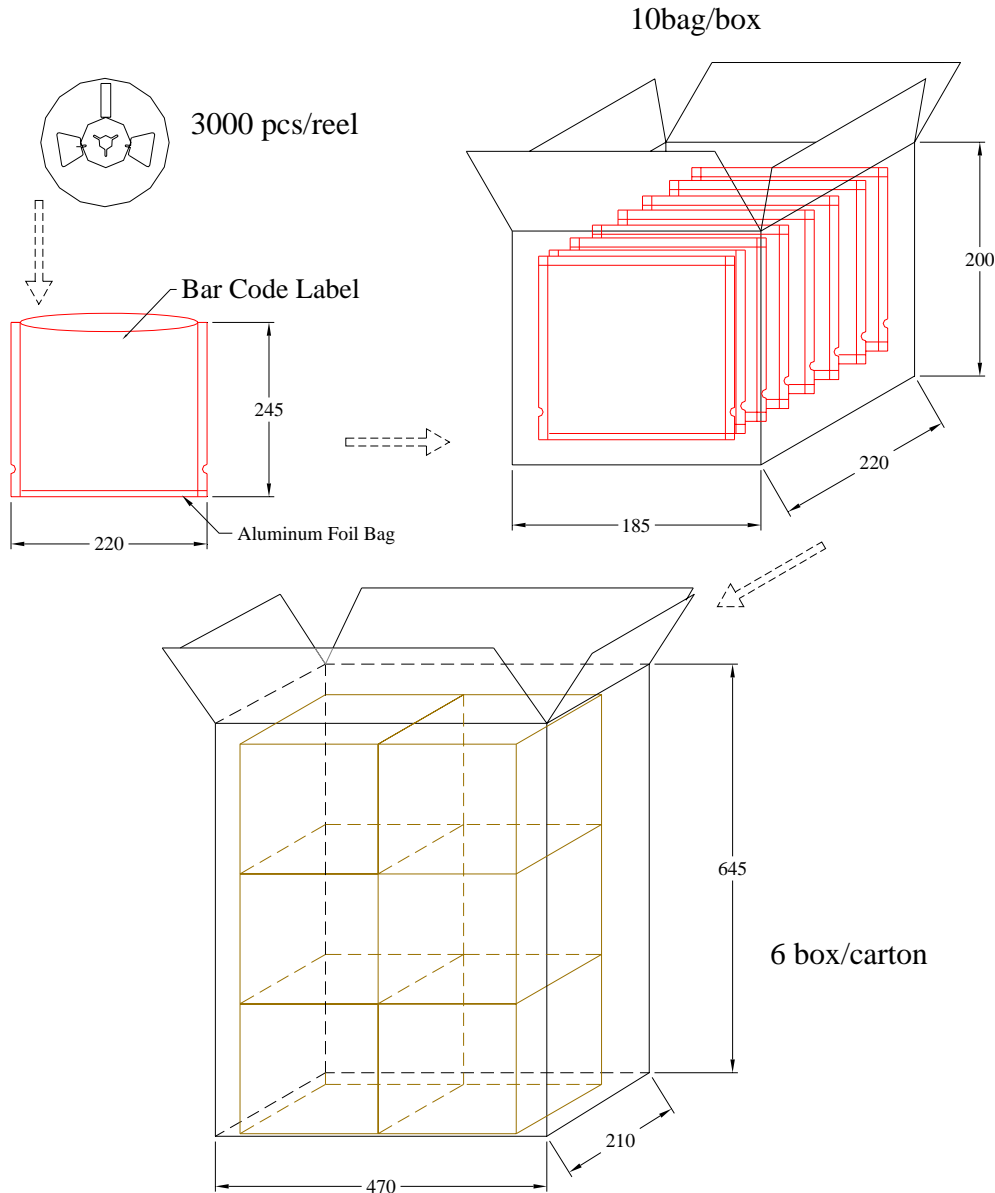

● **Bin Limits**


Intensity Bin Limits (@20mA):

| BIN CODE | Min. (mcd) | Max. (mcd) |
|----------|------------|------------|
| T | 1800 | 1900 |
| U | 1900 | 2000 |
| V | 2000 | 2100 |
| W | 2100 | 2200 |
| X | 2200 | 2300 |
| Y | 2300 | 2400 |
| Z | 2400 | 2500 |
| A | 2500 | 2600 |

VF Bin Limits (@20mA):

| BIN CODE | Min.(v) | Max.(v) |
|----------|---------|---------|
| F1 | 2.6 | 2.7 |
| F2 | 2.7 | 2.8 |
| G1 | 2.8 | 2.9 |
| G2 | 2.9 | 3.0 |
| H1 | 3.0 | 3.1 |
| H2 | 3.1 | 3.2 |


Color Bin Limits (@20mA)

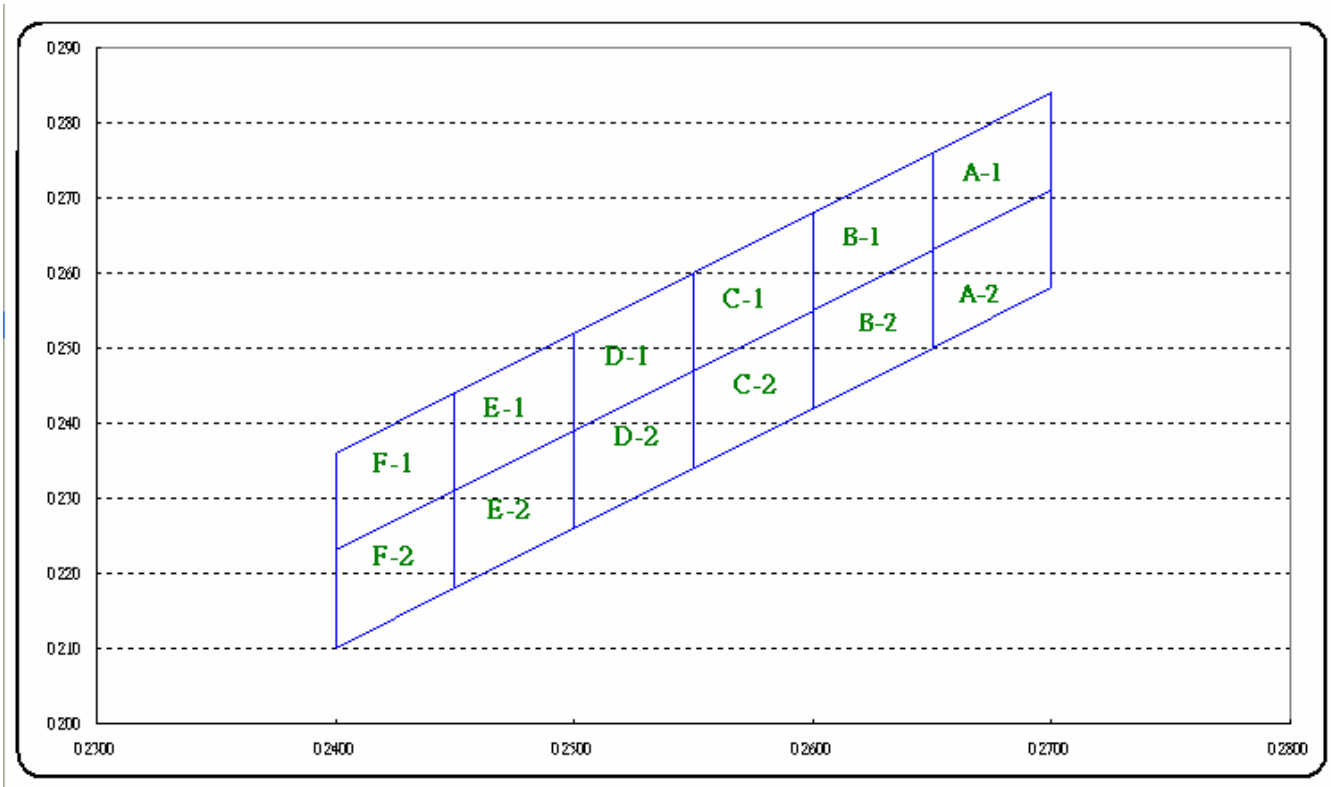

Color Bin Limits(@20mA):

| BIN | Chromaticity Coordinates | | | | |
|-----|--------------------------|--------|--------|--------|--------|
| | X | Y | Z | u' | v' |
| A-1 | X | 0.2650 | 0.2700 | 0.2700 | 0.2650 |
| | Y | 0.2500 | 0.2580 | 0.2710 | 0.2630 |
| A-2 | X | 0.2650 | 0.2700 | 0.2700 | 0.2650 |
| | Y | 0.2630 | 0.2710 | 0.2840 | 0.2760 |
| B-1 | X | 0.2600 | 0.2650 | 0.2650 | 0.2600 |
| | Y | 0.2420 | 0.2500 | 0.2630 | 0.2550 |
| B-2 | X | 0.2600 | 0.2650 | 0.2650 | 0.2600 |
| | Y | 0.2550 | 0.2630 | 0.2760 | 0.2680 |
| C-1 | X | 0.2550 | 0.2600 | 0.2600 | 0.2550 |
| | Y | 0.2340 | 0.2420 | 0.2550 | 0.2470 |
| C-2 | X | 0.2550 | 0.2600 | 0.2600 | 0.2550 |
| | Y | 0.2470 | 0.2550 | 0.2680 | 0.2600 |
| D-1 | X | 0.2500 | 0.2550 | 0.2550 | 0.2500 |
| | Y | 0.2260 | 0.2340 | 0.2470 | 0.2390 |
| D-2 | X | 0.2500 | 0.2550 | 0.2550 | 0.2500 |
| | Y | 0.2390 | 0.2470 | 0.2600 | 0.2520 |
| E-1 | X | 0.2450 | 0.2500 | 0.2500 | 0.2450 |
| | Y | 0.2180 | 0.2260 | 0.2390 | 0.2310 |
| E-2 | X | 0.2450 | 0.2500 | 0.2500 | 0.2450 |
| | Y | 0.2310 | 0.2390 | 0.2520 | 0.2440 |
| F-1 | X | 0.2400 | 0.2450 | 0.2450 | 0.2400 |
| | Y | 0.2100 | 0.2180 | 0.2310 | 0.2230 |
| F-2 | X | 0.2400 | 0.2450 | 0.2450 | 0.2400 |
| | Y | 0.2230 | 0.2310 | 0.2440 | 0.2360 |

CCT : Tolerance for each Bin limit is $\pm 100K$

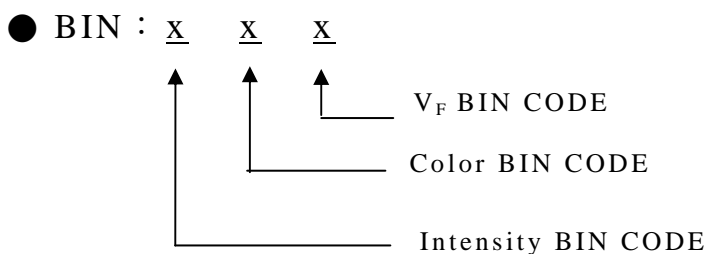

Notes:

1. I_v : Tolerance for each Bin limit is $\pm 10 \%$
2. Color : Tolerance for each Bin limit is ± 0.005
3. Bin categories are established for classification of products.
Products may not be available in all bin categories.

● Reliability Test

| Classification | Test Item | Reference Standard | Test Conditions | Result |
|--------------------|--|---|--|--------|
| Endurance Test | Operation Life | MIL-STD-750:1026 MIL-STD-883:1005 JIS-C-7021 :B-1 | Connect with a power $I_f=20\text{mA}$ T_a =Under room temperature Test time=1,000hrs | 0/20 |
| | High Temperature High Humidity Storage | MIL-STD-202:103B JIS-C-7021 :B-11 | $T_a=+65^\circ\text{C}\pm 5^\circ\text{C}$ RH=90%-95% Test time=240hrs | 0/20 |
| | High Temperature Storage | MIL-STD-883:1008 JIS-C-7021 :B-10 | High $T_a=+85^\circ\text{C}\pm 5^\circ\text{C}$ Test time=1,000hrs | 0/20 |
| | Low Temperature Storage | JIS-C-7021 :B-12 | Low $T_a=-35^\circ\text{C}\pm 5^\circ\text{C}$ Test time=1,000hrs | 0/20 |
| Environmental Test | Temperature Cycling | MIL-STD-202:107D MIL-STD-750:1051 MIL-STD-883:1010 JIS-C-7021 :A-4 | $-35^\circ\text{C} \sim +25^\circ\text{C} \sim +85^\circ\text{C} \sim +25^\circ\text{C}$ 60min 20min 60min 20min Test Time=5cycle | 0/20 |
| | Thermal Shock | MIL-STD-202:107D MIL-STD-750:1051 MIL-STD-883:1011 | $-35^\circ\text{C}\pm 5^\circ\text{C} \sim +85^\circ\text{C}\pm 5^\circ\text{C}$ 20min 20min Test Time=10cycle | 0/20 |
| | Solder Resistance | MIL-STD-202:201A MIL-STD-750:2031 JIS-C-7021 :A-1 | Preheating : $140^\circ\text{C}-160^\circ\text{C}$, within 2 minutes. Operation heating : 260°C (Max.), within 10seconds. (Max.) | 0/20 |


● Judgment criteria of failure for the reliability

| Measuring items | Symbol | Measuring conditions | Judgement criteria for failure |
|--------------------|--------------------|----------------------|--------------------------------|
| Forward voltage | V_F (V) | $I_F=20\text{mA}$ | Over $U_x1.2$ |
| Reverse current | $I_R(\mu\text{A})$ | $V_R=5\text{V}$ | Over U_x2 |
| Luminous intensity | I_v (mcd) | $I_F=20\text{mA}$ | Below $SX0.5$ |

Note: 1.U means the upper limit of specified characteristics. S means initial value.

2.Measurment shall be taken between 2 hours and after the test pieces have been returned to normal ambient conditions after completion of each test.

● IR-Reflow Soldering

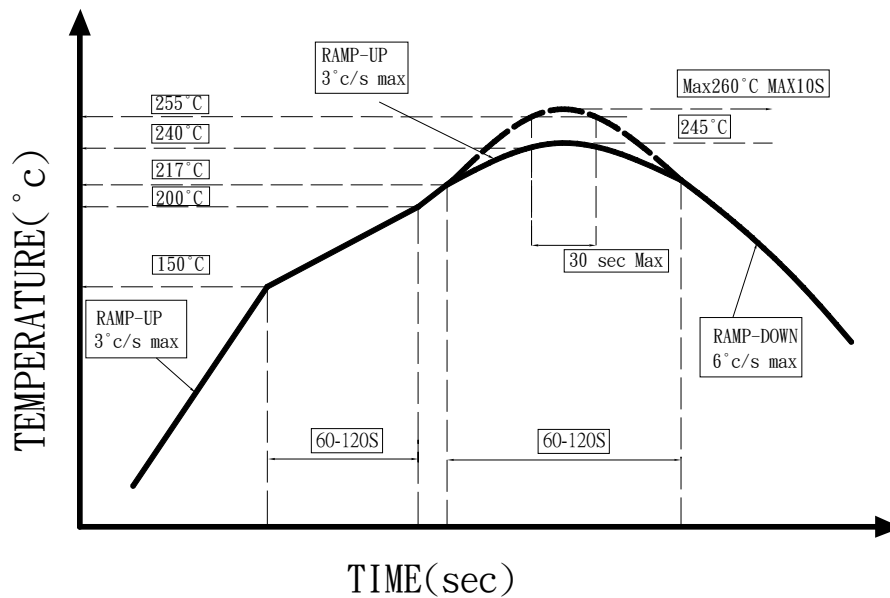

1. Avoid any external stress applied to the resin while the LEDs are at high temperature, especially during soldering .
2. Avoid rapid cooling or any excess vibration during temperature ramp-down process
3. Although the soldering condition is recommended above, soldering at the lowest possible temperature is feasible for the LEDs

● IRON Soldering

350°C Within 3 sec, one time only.

● **Handling :**

Care must be taken not to cause to the resin portion of BRIGHT LEDs while it is exposed to high temperature.

Care must be taken not rub the epoxy resin portion of BRIGHT LEDs with hard or sharp article such as the sand blast and the metal hook.

● **Notes for designing:**

Care must be taken to provide the current limiting resistor in the circuit so as to drive the BRIGHT LEDs within the rated figures. Also, caution should be taken not to overload BRIGHT LEDs with instantaneous voltage at the turning ON and OFF of the circuit.

When using the pulse drive care must be taken to keep the average current within the rated figures. Also, the circuit should be designed so as be subjected to reverse voltage when turning off the BRIGHT LEDs.

● **Storage:**

In order to avoid the absorption of moisture, it is recommended to solder BRIGHT LEDs as soon as possible after unpacking the sealed envelope.

If the envelope is still packed, to store it in the environment as following:

- (1) Temperature : 5°C-30°C (41°F) Humidity : RH 60% Max.
- (2) After this bag is opened, devices that will be applied to infrared reflow, vapor-phase reflow, or equivalent soldering process must be:
 - a. Completed within 24 hours.
 - b. Stored at less than 20% RH.
- (3) Devices require baking before mounting, if:
 - (2) a or (2) b is not met.
- (4) If baking is required, devices must be baked under below conditions:
 - 48 hours at 60°C±5°C.

● **Package and Label of Products:**

- (1) Package: Products are packed in one bag of 3000 pcs (one taping reel) and a label is attached on each bag.
- (2) Label:

