

LR2128A

Preliminary

LINEAR INTEGRATED CIRCUIT

**300mA SELECTABLE
FIXED/ADJUSTABLE LOW
DROPOUT LINEAR
REGULATOR**

■ DESCRIPTION

As a low dropout linear regulator, the UTC **LR2128A** only needs low input voltage (2.5~6V) and can deliver current to 300mA for setting the output voltage.

The UTC **LR2128A** is an ideal for being used in such battery-powered equipments notebook, personal computer and cellular phone. Its typical dropout voltage is 230mV at loading current 300mA.

For setting the output voltage, the UTC **LR2128A** has two output voltage operation modes: fixed mode senses the output voltage on V_{OUT} , ADJ mode needs two resistors as a voltage divider.

To protect itself against current over-loads and over temperature, the UTC **LR2128A** has current limit and thermal shutdown functions.

■ FEATURES

- * Operating Voltage: 2.5~6V
- * Low Voltage Dropout
- * Output Current Guaranteed 300mA
- * For Setting Output Voltage Two Modes
 - Fixed mode :Fixed Output Voltage 1~5V
 - ADJ mode: Adjustable Output Voltage 0.8~5.5V
- * Internal Current Limit Protection
- * With Soft-Start
- * Internal thermal Protection
- * Work stably with Low ESR Ceramics Capacitor


■ ORDERING INFORMATION

Ordering Number	Package	Packing
LR2128AG-xx-AF5-R	SOT-25	Tape Reel


Note: xx: Output Voltage, Refer to Marking Information.

LR2128AG-xx-AF5-R	(1)Packing Type (2)Package Type (3)Output Voltage Code (4)Green Package	(1) R: Tape Reel (2) AF5: SOT-25 (3) xx: refer to Marking Information (4) G: Halogen Free and Lead Free
-------------------	--	--

■ MARKING INFORMATION

PACKAGE	VOLTAGE CODE	MARKING
SOT-25	25: 2.5V	 L8AXX → Output Voltage


■ PIN CONFIGURATION

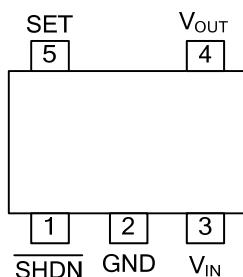

■ PIN DESCRIPTION

PIN NO	PIN NAME	DESCRIPTION
1	SHDN	Control pin for shutdown
		Logic High: enable
		Logic Low: shutdown
2	GND	Ground
3	V _{IN}	Voltage supply
4	V _{OUT}	Output pin
5	SET	When this pin is connected to ground, turns to fixed output voltage operation. When this pin is connected to an external resistor divider, turns to adjustable output voltage mode operation.

■ BLOCK DIAGRAM

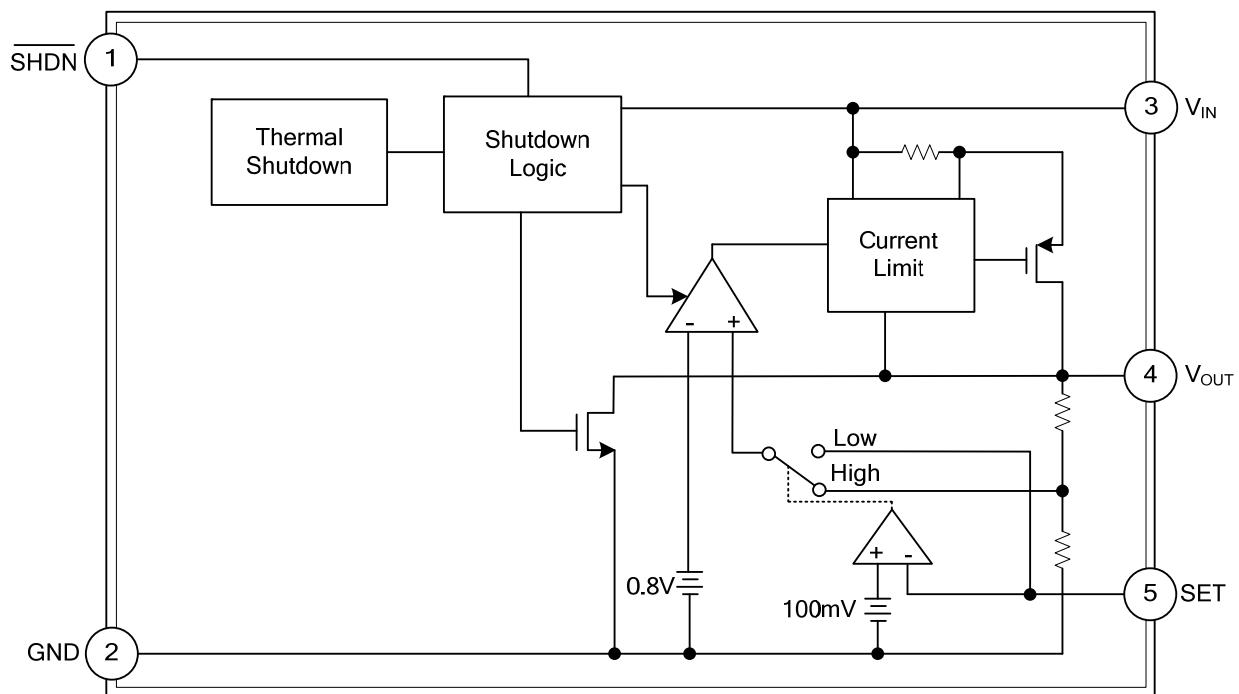

■ ABSOLUTE MAXIMUM RATING ($T_A=25^\circ\text{C}$, Unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
V_{IN} Supply Voltage (V_{IN} to GND)	V_{IN}	-0.3 ~ +6.5	V
SHDN Input Voltage (\overline{SHDN} to GND)	$V_{\overline{SHDN}}$	-0.3 ~ +6.5	V
Power Dissipation	P_D	380	mW
Junction Temperature	T_J	-40 ~ +125	°C
Storage Temperature	T_{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	RATINGS	UNIT
V_{IN} Supply Voltage	V_{IN}	2.5 ~ 6	V
Output Voltage	V_{OUT}	0.8 ~ 5.5	V
V_{OUT} Output Current	I_{OUT}	0 ~ 300	mA
Input Capacitor	C_{IN}	0.22 ~ 100	μF
Output Capacitor	C_{OUT}	1.5 ~ 33	μF
Junction Temperature	T_{OPR}	-40 ~ +85	°C


■ ELECTRICAL CHARACTERISTICS

($V_{IN}=V_{OUT}+1\text{V}$ (min $V_{IN}=2.8\text{V}$), $I_{OUT}=0\sim 300\text{mA}$, $C_{IN}=1\mu\text{F}$, $C_{OUT}=2.2\mu\text{F}$, $T_A=25^\circ\text{C}$, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}		0.8		5.5	V
Input Voltage	V_{IN}		2.5		6	V
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	$\Delta V_{OUT}\%/\Delta V_{IN}$, $I_{OUT}=10\text{mA}$	-0.07		+0.07	%/V
Load Regulation	$\frac{\Delta V_{OUT}}{V_{OUT}}$	$\Delta V_{OUT}\%/V_{OUT}$	-0.4		+0.4	%/V
Output Voltage Accuracy		Fixed output voltage, $I_{OUT}=10\text{mA}$	-2		+2	%
Reference Voltage	V_{REF}	Measured on SET, $V_{IN}=2.8\text{V}$, $I_{OUT}=10\text{mA}$	0.784	0.8	0.816	V
Quiescent Current	I_Q	$I_{OUT}=10\text{mA}\sim 300\text{mA}$		90	160	μA
Dropout Voltage	V_D	$V_{OUT}=2.5\text{V}$, $I_{OUT}=300\text{mA}$		230	360	mV
		$V_{OUT}=3.3\text{V}$, $I_{OUT}=300\text{mA}$		170	300	mV
Power Supply Ripple Rejection Ratio	PSRR	$f=10\text{kHz}$, $I_{OUT}=300\text{mA}$		45		dB
Output Voltage Noise	eN	$f=80\text{Hz}\sim 100\text{KHz}$, $I_{OUT}=300\text{mA}$		160		μV _{RMS}
Current Limit	I_{LIMIT}		300			mA
Shutdown Threshold	V_{IH}		1.6			V
	V_{IL}				0.4	V
Shutdown Supply Current	I_{OFF}	$\overline{SHDN}=\text{Low}$, $V_{IN}=6\text{V}$		0.1	1	μA
V_{OUT} Discharge MOSFET $R_{DS(ON)}$		$\overline{SHDN}=\text{Low}$		60		Ω
Thermal Shutdown Temperature	T_{SHDN}			150		°C
Thermal Shutdown Hysteresis	DT_{SHDN}			20		°C
SET Input Threshold for Fixed/Adjustable Output Voltage Mode				80		mV
SET Input Bias Current			100		100	nA
Soft-Start Interval	T_{SS}			60		μs

■ TYPICAL APPLICATION CIRCUIT

For Fixed Output Voltage Mode

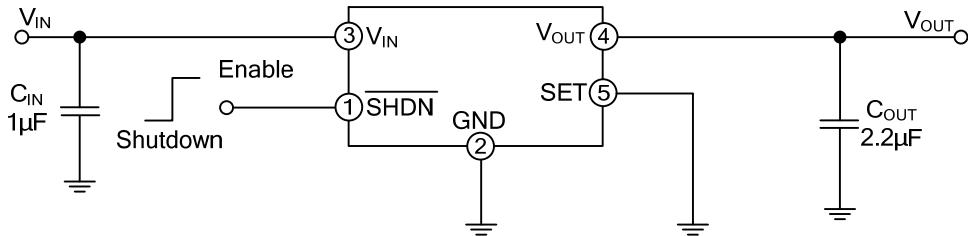

For Adjustable Output Voltage Mode

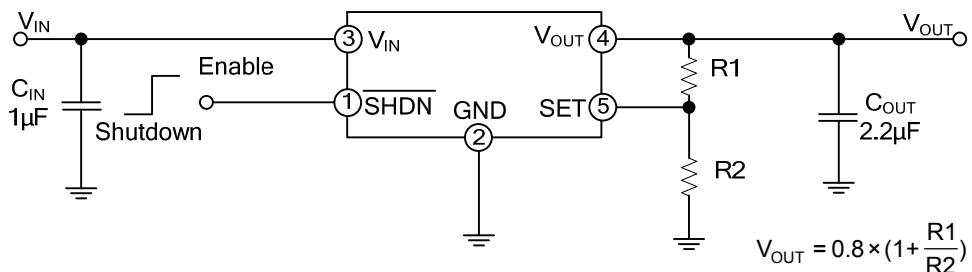

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.