



LR2128B

Preliminary

LINEAR INTEGRATED CIRCUIT

300mA SELECTABLE FIXED/ADJUSTABLE LOW DROPOUT LINEAR REGULATOR


■ DESCRIPTION

As a low dropout linear regulator, the UTC **LR2128B** only needs low input voltage (2.5~6V) and can deliver current to 300mA for setting the output voltage.

The UTC **LR2128B** is an ideal for being used in such battery-powered equipments notebook, personal computer and cellular phone. Its typical dropout voltage is 230mV at loading current 300mA.

For setting the output voltage, the UTC **LR2128B** has two output voltage operation modes: fixed mode senses the output voltage on V_{OUT} , ADJ mode needs two resistors as a voltage divider.

To protect itself against current over-loads and over temperature, the UTC **LR2128B** has current limit and thermal shutdown functions.



SOT-25

■ FEATURES

- * Operating Voltage: 2.5~6V
- * Low Voltage Dropout
- * Output Current Guaranteed 300mA
- * For Setting Output Voltage Two Modes
 - Fixed mode :Fixed Output Voltage 1~5V
 - ADJ mode: Adjustable Output Voltage 0.8~5.5V
- * Internal Current Limit Protection
- * With Soft-Start
- * Internal thermal Protection
- * Work stably with Low ESR Ceramics Capacitor


■ ORDERING INFORMATION

Ordering Number	Package	Packing
LR2128BG-xx-AF5-R	SOT-25	Tape Reel


Note: xx: Output Voltage, Refer to Marking Information.

LR2128BG-xx-AF5-R	(1) Packing Type	(1) R: Tape Reel
	(2) Package Type	(2) AF5: SOT-25
	(3) Output Voltage Code	(3) xx: refer to Marking Information
	(4) Green Package	(4) G: Halogen Free and Lead Free

MARKING INFORMATION

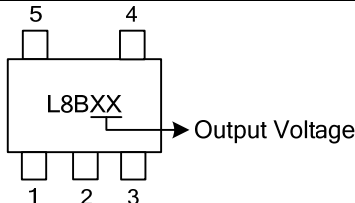PACKAGE	VOLTAGE CODE	MARKING
SOT-25	25: 2.5V	


PIN CONFIGURATION



PIN DESCRIPTION

PIN NO	PIN NAME	DESCRIPTION
1	V_{IN}	Voltage supply
2	GND	Ground
3	$\overline{\text{SHDN}}$	Control pin for shutdown
		Logic High: enable
		Logic Low: shutdown
4	SET	When this pin is connected to ground, turns to fixed output voltage operation. When this pin is connected to an external resistor divider, turns to adjustable output voltage mode operation.
5	V_{OUT}	Output pin

■ BLOCK DIAGRAM

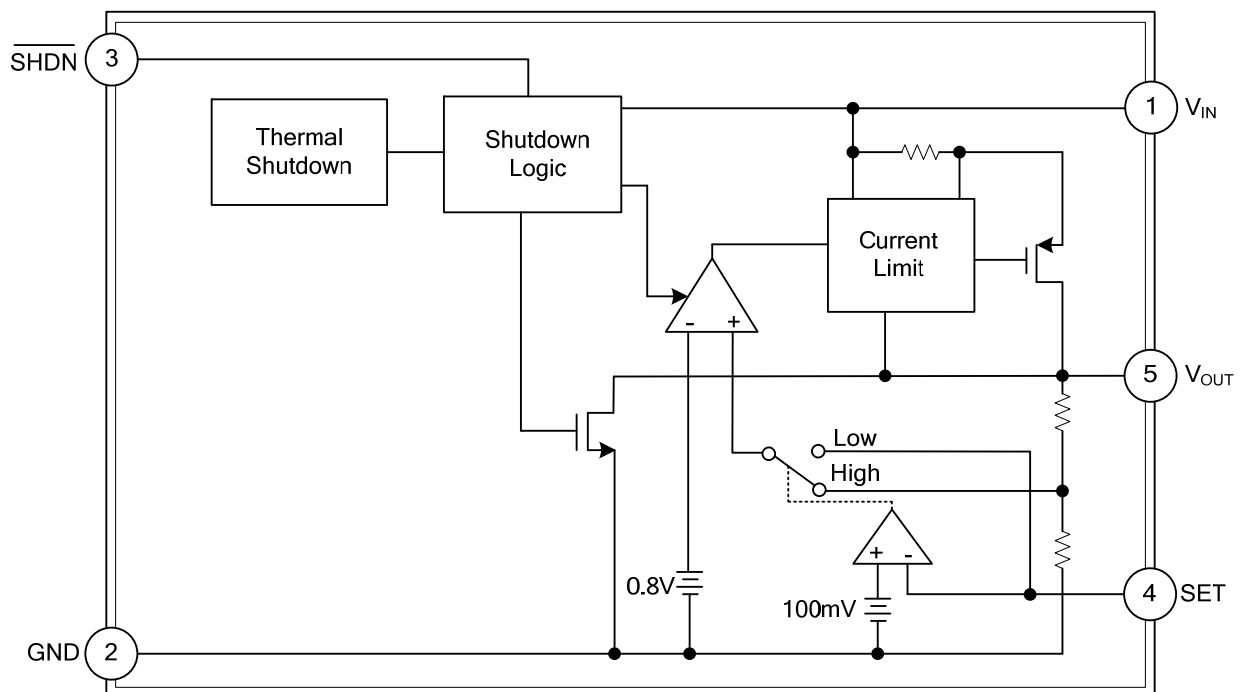

■ ABSOLUTE MAXIMUM RATING (T_A=25°C, Unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
V _{IN} Supply Voltage (V _{IN} to GND)	V _{IN}	-0.3 ~ +6.5	V
SHDN Input Voltage (SHDN to GND)	V _{SHDN}	-0.3 ~ +6.5	V
Power Dissipation	P _D	380	mW
Junction Temperature	T _J	-40 ~ +125	°C
Storage Temperature	T _{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	RATINGS	UNIT
V _{IN} Supply Voltage	V _{IN}	2.5 ~ 6	V
Output Voltage	V _{OUT}	0.8 ~ 5.5	V
V _{OUT} Output Current	I _{OUT}	0 ~ 300	mA
Input Capacitor	C _{IN}	0.22 ~ 100	μF
Output Capacitor	C _{OUT}	1.5 ~ 33	μF
Junction Temperature	T _{OPR}	-40 ~ +85	°C


■ ELECTRICAL CHARACTERISTICS

(V_{IN}=V_{OUT}+1V (min V_{IN}=2.8V), I_{OUT}=0~300mA, C_{IN}=1μF, C_{OUT}=2.2μF, T_A=25°C, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}		0.8		5.5	V
Input Voltage	V _{IN}		2.5		6	V
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	$\Delta V_{OUT}\% / \Delta V_{IN}$, I _{OUT} =10mA	-0.07		+0.07	%/V
Load Regulation	$\frac{\Delta V_{OUT}}{V_{OUT}}$	$\Delta V_{OUT}\% / V_{OUT}$	-0.4		+0.4	%/V
Output Voltage Accuracy		Fixed output voltage, I _{OUT} =10mA	-2		+2	%
Reference Voltage	V _{REF}	Measured on SET, V _{IN} =2.8V, I _{OUT} =10mA	0.784	0.8	0.816	V
Quiescent Current	I _Q	I _{OUT} =10mA~300mA		90	160	μA
Dropout Voltage	V _D	V _{OUT} =2.5V, I _{OUT} =300mA		230	360	mV
		V _{OUT} =3.3V, I _{OUT} =300mA		170	300	mV
Power Supply Ripple Rejection Ratio	PSRR	f=10kHz, I _{OUT} =300mA		45		dB
Output Voltage Noise	eN	f=80Hz~100KHz, I _{OUT} =300mA		160		μV _{RMS}
Current Limit	I _{LIMIT}		300			mA
Shutdown Threshold	V _{IH}		1.6			V
	V _{IL}				0.4	V
Shutdown Supply Current	I _{OFF}	SHDN =Low, V _{IN} =6V		0.1	1	μA
V _{OUT} Discharge MOSFET R _{DS(ON)}		SHDN =Low		60		Ω
Thermal Shutdown Temperature	T _{SHDN}			150		°C
Thermal Shutdown Hysteresis	DT _{SHDN}			20		°C
SET Input Threshold for Fixed/Adjustable Output Voltage Mode				80		mV
SET Input Bias Current			100		100	nA
Soft-Start Interval	T _{SS}			60		μs

■ TYPICAL APPLICATION CIRCUIT

For Fixed Output Voltage Mode

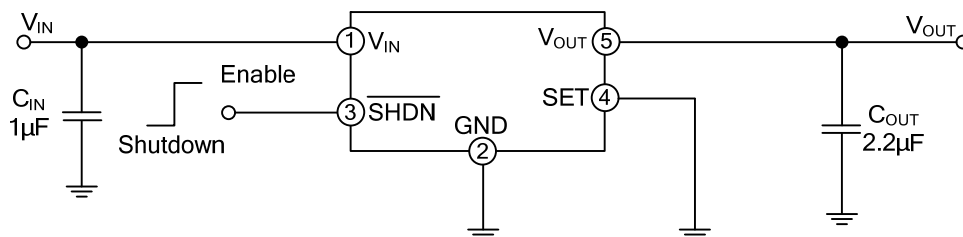

For Adjustable Output Voltage Mode

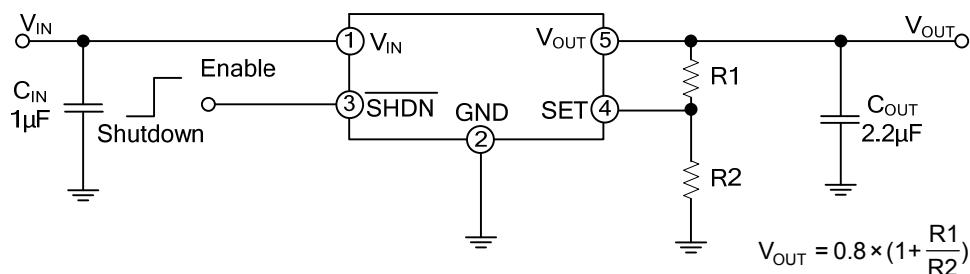

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.