



## LR9107

Preliminary

CMOS IC


### OUTPUT CAPACITOR-LESS LOW VOLTAGE 200mA LDO REGULATOR

#### DESCRIPTION

The UTC **LR9107** is a CMOS-based low dropout regulator with high output voltage accuracy, low dropout, high PSRR and low quiescent current.

The UTC **LR9107** includes a voltage reference unit, an error amplifier, current limit circuit, resistors for setting output voltage, and a chip enable circuit. With its low power consumption, excellent line and load transient response, the UTC **LR9107** is well suited for low power handheld communication equipment.

Since the output capacitor and noise bypass capacitor are able to be reduced, high density mounting on boards are possible.



SOT-25

#### FEATURES

- \* Quiescent current: Typ. 9.5 $\mu$ A
- \* Low  $V_{IN}$  and wide  $V_{IN}$  range: 1.4V~5.25V
- \* Guarantee output current: 200mA
- \*  $V_{OUT}$  accuracy:  $\pm 1\%$
- \* Ripple Rejection: Typ. 70dB ( $f=1\text{kHz}, V_{OUT}\leq 1.2\text{V}$ )  
Typ. 65dB ( $f=1\text{kHz}, 1.2\text{V}<V_{OUT}<2.2\text{V}$ )  
Typ. 60dB ( $f=1\text{kHz}, V_{OUT}\geq 2.2\text{V}$ )
- \* Temperature-drift coefficient of output voltage: Typ.  $\pm 100\text{ppm}/^\circ\text{C}$
- \* Low output noise: 60 $\mu\text{V}_{rms}$  (10Hz~100kHz)
- \* Quiescent current: 35 $\mu$ A


#### ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
LR9107xL-xx-AF5-R	LR9107xG-xx-AF5-R	SOT-25	Tape Reel


Note: xx: Output Voltage, refer to Marking Information.

LR9107xG-xx-AF5-R	(1) Packing Type (2) Package Type (3) Output Voltage Code (4) Green Package (5) Active	(1) R: Tape Reel (2) AF5: SOT-25 (3) xx: refer to Marking Information (4) G: Halogen Free and Lead Free, L: Lead Free (5) B: without auto discharge function D: with auto discharge function
-------------------	--	---

## MARKING

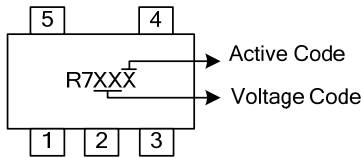PACKAGE	VOLTAGE CODE	MARKING
SOT-25	18: 1.8V 28: 2.8V	



## PIN CONFIGURATION



## PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	$V_{IN}$	Power Input Pin
2	GND	Ground
3	CE	Enable Pin. This pin should not be floating. Driving this pin "1" enables the regulator, while "0" shutdown the regulator.
4	NC	No Connection
5	$V_{OUT}$	Power Output Pin

## BLOCK DIAGRAM

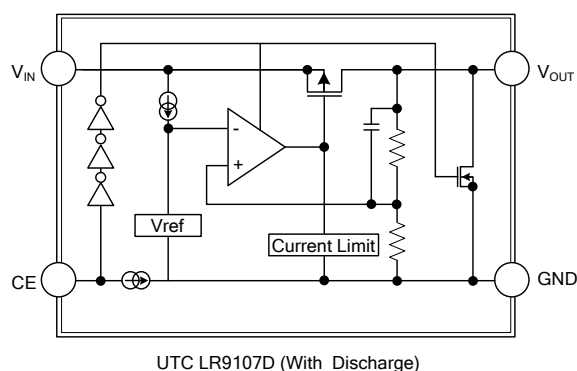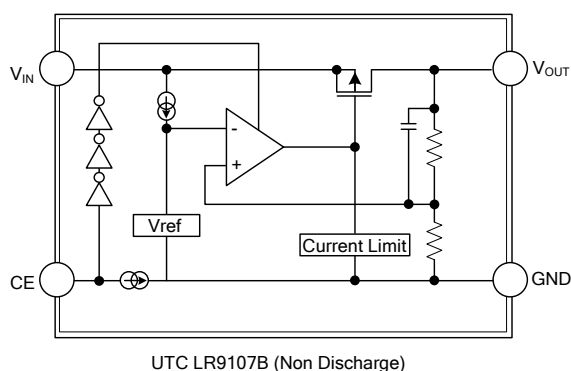

■ ABSOLUTE MAXIMUM RATINGS ( $T_A=25^{\circ}\text{C}$ , unless otherwise specified.)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	$V_{IN}$	6.0	V
Input Voltage CE	$V_{CE}$	6.0	V
Output Voltage	$V_{OUT}$	-0.3 ~ $V_{IN}+0.3$	V
Output Current	$I_{OUT}$	300	mA
Power Dissipation	$P_D$	380	mW
Operating Temperature	$T_A$	-40 ~ +85	$^{\circ}\text{C}$
Storage Temperature	$T_{STG}$	-55 ~ +125	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS ( $T_A=25^{\circ}\text{C}$ , unless otherwise specified.)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	$V_{IN}$	1.7 ~ 5.25	V
Output Current	$I_{OUT}$	0 ~ 150	mA
Operating Ambient Temperature	$T_A$	-40 ~ +85	$^{\circ}\text{C}$

■ ELECTRICAL CHARACTERISTICS

( $V_{CE}=V_{IN}=V_{OUT}+1.0\text{V}$ ,  $C_{IN}=C_{OUT}=0.47\mu\text{F}$ ,  $I_{OUT}=1.0\text{mA}$ ,  $T_A=25^{\circ}\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage	$V_{IN}$	$T_A=-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$			5.25	V
Output Voltage Accuracy (Note 6)	$V_{OC}$	$V_{IN}=(V_{OUT-NOM}+1.0\text{V})\sim 5.25\text{V}$ , $T_A=+25^{\circ}\text{C}$ $I_{OUT}=1\text{mA}\sim 200\text{mA}$ , $T_A=-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$	-1		+1	%
Line Regulation ( $dV_{OUT}/dV_{IN}/V_{OUT}$ )	$\Delta V_{OUT}/\Delta V_{IN}$	$V_{IN}=(V_{OUT-NOM}+1.0\text{V})\sim 5.25\text{V}$ , $I_{OUT}=1.0\text{mA}$		0.02	0.1	%/V
Load Regulation ( $dV_{OUT}/V_{OUT}/dI_{OUT}$ )	$\Delta V_{OUT}/\Delta I_{OUT}$	$V_{IN}=V_{OUT-NOM}+1.0\text{V}$ , $I_{OUT}=1\text{mA}\sim 200\text{mA}$		0.5	1.0	%/A
Quiescent Current (Note 2)	$I_Q$	$I_{OUT}=0\text{mA}$		9.5	25	$\mu\text{A}$
$I_{STANDBY}$	$I_{STANDBY}$	$V_{CE}=0\text{V}$ (Disabled)		0.1	3.0	$\mu\text{A}$
Output Current	$I_{OUT}$		200			mA
Fold-Back Short Current (Note 3)	$I_{SC}$	$V_{OUT}$ short to ground		50		mA
Ripple Rejection (Note 4)	RR	$V_{OUT}\leq 1.2\text{V}$ , $f=1\text{kHz}$ $1.2\text{V}<V_{OUT}<2.2\text{V}$ , $V_{IN}=[V_{OUT}+1\text{V}]$ , $V_{OUT}\geq 2.2\text{V}$ , $I_{OUT}=30\text{mA}$		70 65 60		dB
Dropout Voltage (Note 1)	$V_{DROP}$	$I_{OUT}=200\text{mA}$		0.44 0.35 0.27		V
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T}$	$I_{OUT}=30\text{mA}$ , $T_A=-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$		$\pm 100$		ppm/ $^{\circ}\text{C}$
CE Pull-Down Current	$I_{PD}$			0.1		$\mu\text{A}$
CE Input Low Voltage	$V_{CEL}$				0.4	V
CE Input High Voltage	$V_{CEH}$		1.0			V
On Resistance of N-channel for Auto-Discharge (Note 5)	$R_{ON}$	$V_{IN}=4.0\text{V}$ , $V_{EN}=0\text{V}$ (Disabled)		30		$\Omega$

Notes: 1. Dropout voltage ( $V_{DROP}$ ) is the voltage difference between the input and the output at which the output voltage drops 2% below its nominal value.

2. Quiescent current ( $I_Q$ ) is the current difference between the input and the output.


3. Short circuit current ( $I_{SC}$ ) is measured with  $V_{OUT}$  pulled to GND.

4. This specification is guaranteed by design.


5. UTC LR9107 has 2 options for output, built-in discharge and non-discharge.

6. Potential multiple grades based on following output voltage accuracy.


## ■ TEST CIRCUITS

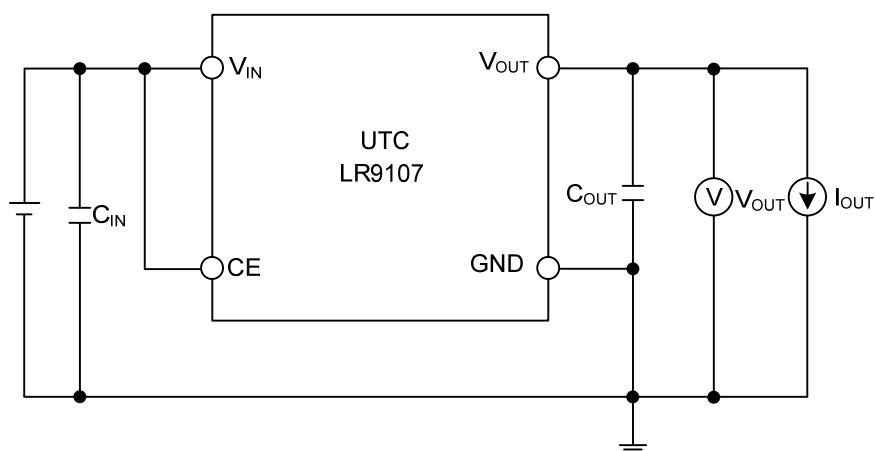

Basic Test Circuit

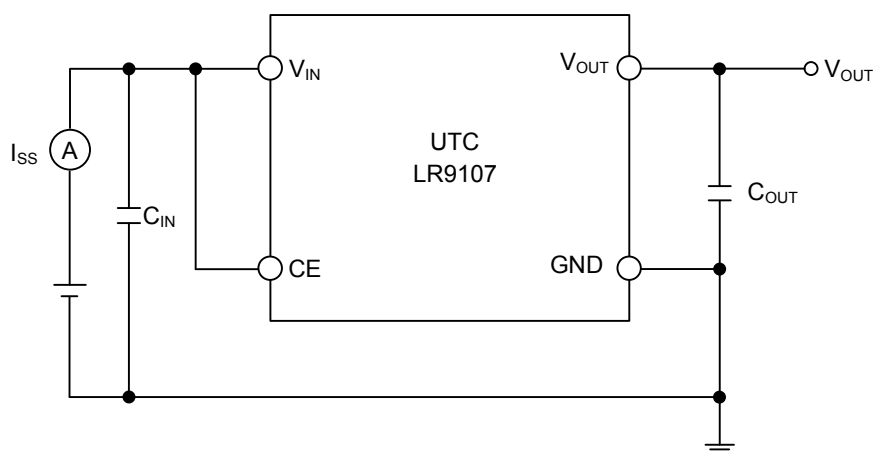


Test Circuit for Supply Current

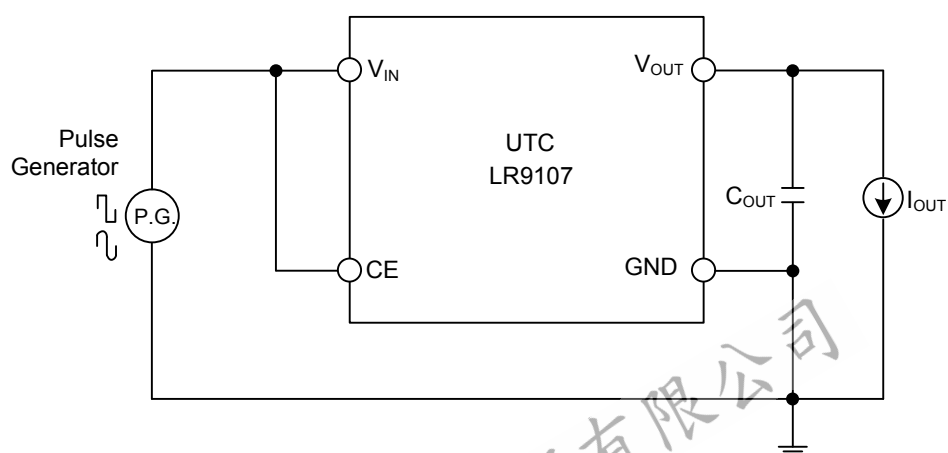


Test Circuit for Ripple Rejection

# ■ TEST CIRCUITS (Cont.)

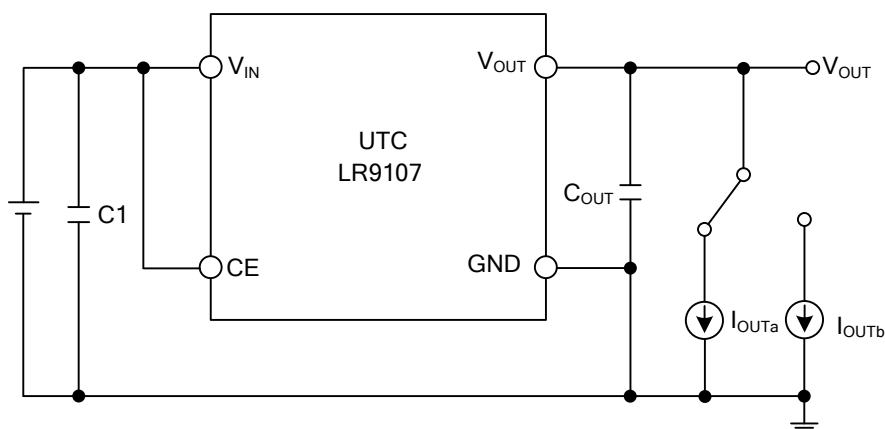

Test Circuit for Load Transient Response

# ■ TYPICAL APPLICATION CIRCUIT

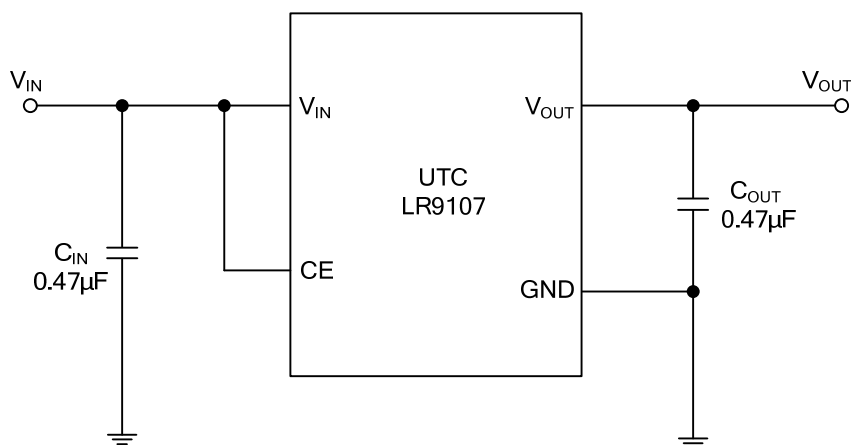

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.