


凯美系列：TU

智寶系列：TC

低阻抗、长寿命系列


- 耐久性：105℃ 6000~10000小时
- 推荐应用：适用于AV(TV,视频,音频),OA/HA/通讯, 开关电源, 适配器, 监视器/电脑, 变频器/逆变器
- 符合相应RoHS产品



规格表

项目	性能									
工作温度范围	-40 ~ +105℃									
额定电压范围	6.3~100VDC									
额定电容量范围	8.2 ~ 8200 $\mu$ F									
静电容量容许差	$\pm 20\%$ (120Hz, 20℃)									
漏电流 (20℃)	I=0.01CV 或者 3 $\mu$ A 中任意一个较大值。(施加额定电压2分钟后测量) I: 漏电流 ( $\mu$ A) C: 静电容量 ( $\mu$ F) V: 额定电压 (VDC)									
损失角正切值 (MAX) ( $\tan \delta$ )(120Hz, 20℃)	WV	6.3	10	16	25	35	50	63	80	100
	$\tan \delta$	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.08
当标称电容量超过1000 $\mu$ F时, 每增加1000 $\mu$ F, 则损失角规格值应增加0.02。										
温度特性 阻抗(Z)比 (MAX)	WV	6.3	10	16	25	35	50	63	80	100
	Z(120Hz)	6.3	10	16	25	35	50	63	80	100
	Z-25℃ / Z+20℃	4	3	2	2	2	2	2	2	2
	Z-40℃ / Z+20℃	8	6	4	3	3	3	3	3	3
耐久性	在105℃环境中, 不超过额定电压的范围下叠加额定纹波电流, 连续加载额定电压6000~10000 小时后, 待温度恢复到20℃ 进行测量时, 应满足以下要求。									
	静电容量变化率	在初始值的 $\pm 25\%$ 以内 (6.3V,10V: $\pm 30\%$ )								
	损失角正切值	不超过规格值的200%								
	漏电流	低于规格值								
	D $\Phi$	5-6.3 $\Phi$		8 $\Phi$		10~18 $\Phi$				
	Life	6000小时		8000小时		10000小时				
高温无负荷特性	在105℃环境中, 无负荷放置1000小时后, 待温度恢复到20℃ 进行测量时, 应满足同耐久性一样的特性变化要求。									

尺寸图

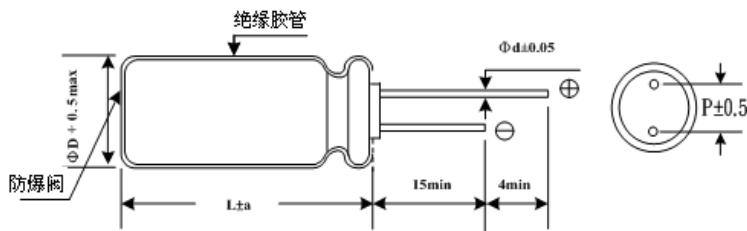

ΦD	5	6.3	8	10	13	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
a	1.5	1.5	1.5	1.5	2.0	2.0	2.0

纹波电流频率修正系数

频率 (Hz)	120	1K	10K	100K
8.2 ~ 33 $\mu$ F	0.42	0.70	0.90	1.00
47 ~ 270 $\mu$ F	0.50	0.73	0.92	1.00
330 ~ 680 $\mu$ F	0.55	0.77	0.94	1.00
820 ~ 1800 $\mu$ F	0.60	0.80	0.96	1.00
2200 ~ 8200 $\mu$ F	0.70	0.85	0.98	1.00

凯美系列：TU

智寶系列：TC

■标准品规格一览表

额定电压 (浪涌电压) (V)	静电容量 ( $\mu$ F)	尺寸 $\Phi$ DxL(mm)	纹波电流 (mA/rms,105°C) (100KHz)	阻抗 ( $\Omega$ ,20°C) (100KHz)	额定电压 (浪涌电压) (V)	静电容量 ( $\mu$ F)	尺寸 $\Phi$ DxL(mm)	纹波电流 (mA/rms,105°C) (100KHz)	阻抗 ( $\Omega$ ,20°C) (100KHz)	
6.3V (8)	220	5x11	345	0.242	35V (44)	220	8x12	945	0.060	
	470	6.3x11	540	0.103		270	8x16	1250	0.050	
	820	8x12	945	0.062		330	10x12.5	1330	0.041	
	1200	8x16	1250	0.050		390	8x20	1500	0.032	
		10x12.5	1330	0.043		470	10x16	1760	0.030	
	1500	8x20	1500	0.032		560	10x20	1960	0.025	
	1800	10x16	1760	0.031		680	10x25	2250	0.023	
	2200	10x20	1960	0.022		1000	13x20	2480	0.025	
	2700	10x25	2250	0.020		1200	13x25	2900	0.022	
	3900	13x20	2480	0.019		1500	13x30	3450	0.018	
	4700	13x25	2900	0.017			16x20	3250	0.020	
	5600	13x30	3450	0.014		1800	13x35	3570	0.018	
	6800	16x20	3250	0.017		2200	16x25	3630	0.015	
		13x35	3570	0.013						
8200	16x25	3630	0.014							
10V (13)	150	5x11	345	0.242	50V (63)	27	5x11	238	0.340	
	330	6.3x11	540	0.103		56	6.3x11	385	0.140	
	680	8x12	945	0.062		100	8x12	724	0.074	
	1000	8x16	1250	0.050		120	8x16	950	0.061	
		10x12.5	1330	0.043		150	10x12.5	979	0.061	
	1500	8x20	1500	0.032		180	8x20	1190	0.046	
		10x16	1760	0.031		220	10x16	1370	0.042	
	1800	10x20	1960	0.022		270	10x20	1580	0.030	
	2200	10x25	2250	0.020		330	10x25	1870	0.028	
	3300	13x20	2480	0.019		470	13x20	2050	0.027	
	3900	13x25	2900	0.017		560	13x25	2410	0.023	
	4700	13x30	3450	0.014		680	13x30	2860	0.021	
		16x20	3250	0.017		820	13x35	2960	0.019	
	5600	13x35	3570	0.013			16x20	2730	0.023	
6800	16x25	3630	0.014	1000	16x25	3010	0.021			
16V (20)	100	5x11	345	0.242	63V (79)	18	5x11	173	1.000	
	220	6.3x11	540	0.103		47	6.3x11	278	0.560	
	470	8x12	945	0.062		82	8x12	525	0.264	
	680	8x16	1250	0.050		100	8x16	688	0.192	
		10x12.5	1330	0.043		120	10x12.5	725	0.180	
	1000	8x20	1500	0.032		150	8x20	861	0.144	
		10x16	1760	0.031		180	10x16	998	0.132	
	1500	10x20	1960	0.025		270	10x20	1200	0.094	
	1800	10x25	2250	0.025			13x16	1200	0.098	
	2200	13x20	2480	0.025		330	10x25	1410	0.083	
	2700	13x25	2900	0.022		390	13x20	1570	0.072	
	3300	13x30	3450	0.018		470	13x25	1990	0.052	
		16x20	3250	0.020		560	13x30	2410	0.042	
	3900	13x35	3570	0.017			16x20	2100	0.052	
4700	16x25	3630	0.018	680	13x35	2620	0.040			
25V (32)	68	5x11	345	0.242	80V (100)	820	13x40	2940	0.032	
	150	6.3x11	540	0.103			16x25	2730	0.038	
	330	8x12	945	0.062		1200	18x20	2500	0.046	
	390	8x16	1250	0.050			16x32	2990	0.029	
	470	10x12.5	1330	0.043		1500	18x25	2800	0.037	
	560	8x20	1500	0.032			16x36	3040	0.025	
	680	10x16	1760	0.031		1800	18x32	3300	0.030	
	820	10x20	1960	0.025			16x40	3570	0.023	
	1000	10x25	2250	0.022		2200	18x36	3570	0.024	
	1500	13x20	2480	0.021			18x40	3670	0.022	
	1800	13x25	2900	0.020		180	12	5x11	163	1.400
	2200	13x30	3450	0.016			33	6.3x11	267	0.570
		16x20	3250	0.019			56	8x12	462	0.360
	2700	13x35	3570	0.015			68	8x16	585	0.250
3300	16x25	3630	0.016	82	10x12.5		624	0.230		
35V (44)	47	5x11	345	0.220	100		8x20	735	0.190	
	100	6.3x11	540	0.094	120	10x16	780	0.170		
					180	10x20	1040	0.120		
						13x16	975	0.130		

凯美系列：TU

智寶系列：TC

■标准品规格一览表

额定电压 (浪涌电压) (V)	静电容量 ( $\mu$ F)	尺寸 $\Phi$ D $\times$ L(mm)	纹波电流 (mA/rms,105 $^{\circ}$ C) (100KHz)	阻抗 ( $\Omega$ ,20 $^{\circ}$ C) (100KHz)	额定电压 (浪涌电压) (V)	静电容量 ( $\mu$ F)	尺寸 $\Phi$ D $\times$ L(mm)	纹波电流 (mA/rms,105 $^{\circ}$ C) (100KHz)	阻抗 ( $\Omega$ ,20 $^{\circ}$ C) (100KHz)
80V (100)	220	10x25	1170	0.110	100V (125)	68	8x20	735	0.190
	270	13x20	1430	0.085		82	10x16	780	0.170
	330	13x25	1620	0.060		100	10x20	1040	0.120
	390	13x30	1950	0.051			13x16	975	0.130
		16x20	1750	0.058		120	10x25	1170	0.110
	470	13x35	2140	0.043		150	13x20	1430	0.085
	560	13x40	2340	0.036		220	13x25	1620	0.060
		16x25	2210	0.044		270	13x30	1950	0.051
		18x20	1950	0.054			16x20	1750	0.058
	680	16x32	2400	0.033		330	13x35	2140	0.043
	820	16x36	2600	0.029		390	13x40	2340	0.036
		18x25	2270	0.038			16x25	2210	0.044
	1000	16x40	2860	0.027			18x20	1950	0.054
		18x32	2470	0.031		470	16x32	2400	0.033
1200	18x36	2860	0.027	18x25	2270		0.038		
1500	18x40	3510	0.026	560	16x36	2600	0.029		
100V (125)	8.2	5x11	163		1.400	18x32	2470	0.031	
	18	6.3x11	267	0.570	680	16x40	2860	0.027	
	33	8x12	462	0.360		18x36	2860	0.027	
	47	8x16	585	0.250	820	18x40	3510	0.026	
	56	10x12.5	624	0.230					