



U74ACT04

CMOS IC


HEX INVERTERS

DESCRIPTION

The UTC **U74ACT04** contains six independent inverters and each of them performs the Boolean function $Y = \bar{A}$.

FEATURES

* Inputs are TTL Voltage Compatible

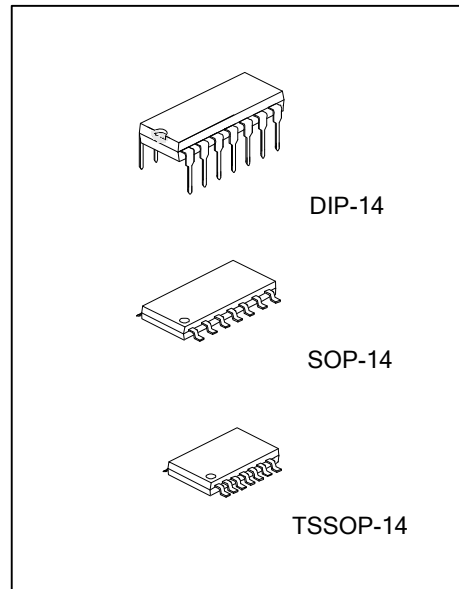


ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74ACT04L-D14-T	U74ACT04G-D14-T	DIP-14	Tube
U74ACT04L-S14-R	U74ACT04G-S14-R	SOP-14	Tape Reel
U74ACT04L-P14-R	U74ACT04G-P14-R	TSSOP-14	Tape Reel

<p>U74ACT04G-D14-T</p> <p>(1) Packing Type (2) Package Type (3) Green Package</p>	<p>(1) T: Tube, R: Tape Reel (2) D14: DIP-14, S14: SOP-14, P14: TSSOP-14 (3) G: Halogen Free and Lead Free, L: Lead Free</p>
---	--


MARKING

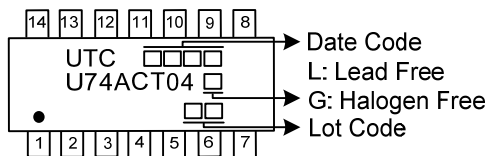

■ PIN CONFIGURATION

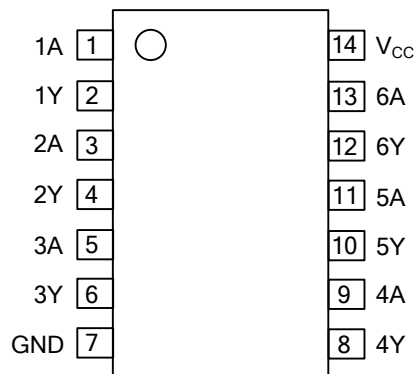

■ FUNCTIONAL DIAGRAM

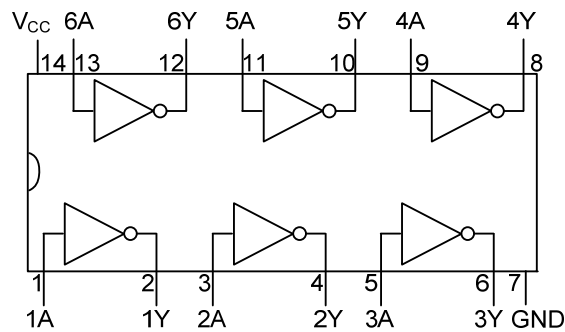


■ FUNCTION TABLE

INPUT(A)	OUTPUT(Y)
L	H
H	L

Note: H=High level; L=Low Level

■ LOGIC DIAGRAM



FLYING 汎翔國際有限公司
www.flying1688.com

■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
DC Supply Voltage	V_{CC}	-0.5 ~ 7	V
Input Voltage	V_{IN}	-0.5 ~ $V_{CC}+0.5$	V
Output Voltage	V_{OUT}	-0.5 ~ $V_{CC}+0.5$	V
DC Input Clamp Current	For $V_{IN} < 0$ or $V_{IN} > V_{CC}$	I_{IK}	±20 mA
DC Output Clamp Current	For $V_{OUT} < 0$ or $V_{OUT} > V_{CC}$	I_{OK}	±20 mA
Continuous Output Current	For $V_{OUT}=0$ to V_{CC}	I_{OUT}	±50 mA
Continuous Current Through V_{CC} or GND			±200 mA
Operating Temperature	T_{OPR}	-40 ~ +85	°C
Storage Temperature	T_{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	81	°C/W
		112	
		141	

■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
Supply Voltage	V_{CC}		4.5		5.5	V	
High Level Input Voltage	V_{IH}	$V_{CC}=4.5\sim 5.5\text{V}$	2			V	
Low Level Input Voltage	V_{IL}	$V_{CC}=4.5\sim 5.5\text{V}$			0.8	V	
High Level Output Voltage	V_{OH}	$V_{CC}=4.5\text{V}$	$I_{OUT}=-50\mu\text{A}$	4.4	4.49	V	
		$V_{CC}=5.5\text{V}$		5.4	5.49	V	
		$V_{CC}=4.5\text{V}$	$I_{OUT}=-24\text{mA}$	3.86		V	
		$V_{CC}=5.5\text{V}$		4.86		V	
Low Level Output Voltage	V_{OL}	$V_{CC}=4.5\text{V}$	$I_{OUT}=-50\mu\text{A}$		0.001	0.1	V
		$V_{CC}=5.5\text{V}$			0.001	0.1	V
		$V_{CC}=4.5\text{V}$	$I_{OUT}=24\text{mA}$			0.36	V
		$V_{CC}=5.5\text{V}$				0.36	V
Input Leakage Current	$I_{I(Leak)}$	$V_{CC}=5.5\text{V}$, $V_{IN}=V_{CC}$ or GND			±0.1	μA	
Quiescent Device Current	I_Q	$V_{CC}=5.5\text{V}$, $V_{IN}=V_{CC}$ or GND, $I_{OUT}=0$			2	μA	
Additional quiescent Supply Current	ΔI_Q	$V_{CC}=5.5\text{V}$, One input at 3.4V, Other inputs at GND or V_{CC}		0.6		mA	
Input Capacitance	C_{IN}	$V_{CC}=5\text{V}$, $V_{IN}=V_{CC}$ or GND		4.5		pF	

■ SWITCHING SPECIFICATIONS ($T_A=25^\circ\text{C}$, Input t_R , $t_F = 2.5\text{ns}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation Delay, A to Y	t_{PLH}	$V_{CC}=5\pm 0.5\text{V}$, $C_L=50\text{pF}$, $R_L=500\Omega$	1	6	8.5	ns
	t_{PHL}	$V_{CC}=5\pm 0.5\text{V}$, $C_L=50\text{pF}$, $R_L=500\Omega$	1	5.5	8	ns
Power Dissipation Capacitance (Notes 1, 2)	C_{PD}	$V_{CC}=5\text{V}$, $C_L=50\text{pF}$, $f=1\text{MHZ}$		45		pF

Notes: 1. C_{PD} is used to determine the dynamic power consumption, per inverter.

2. $P_D = V_{CC}^2 f_i (C_{PD} + C_L)$ where f_i = Input Frequency, C_L = Output Load Capacitance, V_{CC} = Supply Voltage.

■ TEST CIRCUITS AND WAVEFORMS

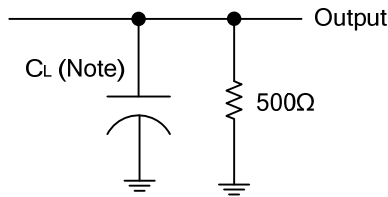


Fig.1: Load circuitry for switching times.
 Note: C_L includes probe and jig capacitance.

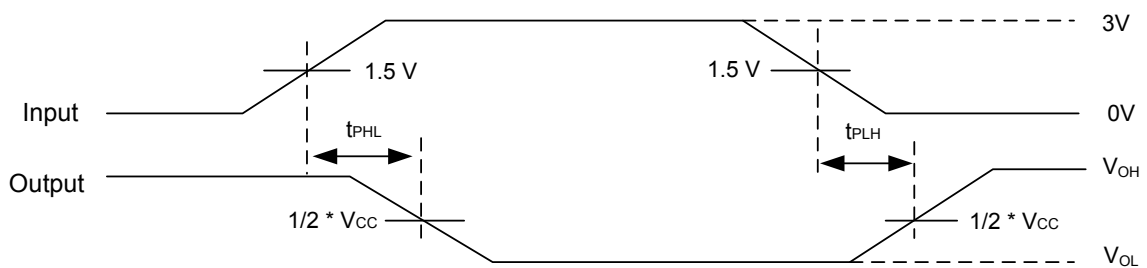


Fig.2: Propagation delay from Input(A) to Output(Y).

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.