



U74AHC06

CMOS IC


INVERTER WITH OPEN-DRAIN OUTPUT

DESCRIPTION

The **U74AHC06** is six independent inverters, and the output of the inverter is an open drain. Each inverter provides the Function $Y = \overline{A}$.

FEATURES

- * Operate from 2V to 5.5V
- * High noise immunity
- * Low power dissipation
- * Balanced propagation delays
- * Output capability standard (open drain)

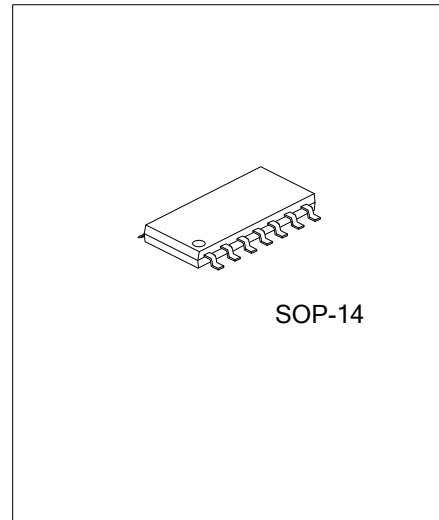


ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74AHC06L-S14-R	U74AHC06G-S14-R	SOP-14	Tape Reel

<p>U74AHC06G-S14-R</p> <ul style="list-style-type: none"> (1) Packing Type (2) Package Type (3) Green Package 	<ul style="list-style-type: none"> (1) R: Tape Reel (2) S14: SOP-14 (3) G: Halogen Free and Lead Free, L: Lead Free
--	--

MARKING

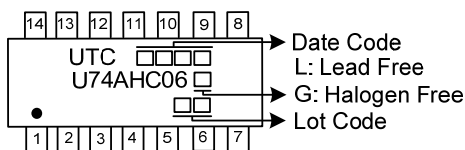

■ PIN CONFIGURATION

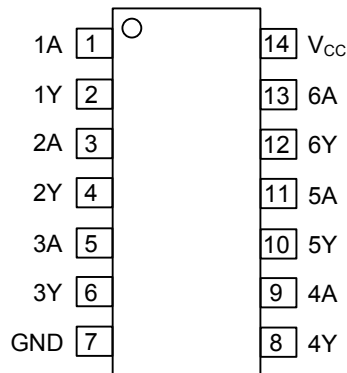


■ FUNCTION TABLE


INPUT A	OUTPUT Y
H	L
L	Z

Note: H: HIGH voltage level; L: LOW voltage level, Z: HIGH impedance OFF-state.

■ LOGIC SYMBOL



Logic symbol



IEC logic symbol

FLYING 汎翔國際有限公司
www.flying1688.com

■ ABSOLUTE MAXIMUM RATING (unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	-0.5 ~ +7	V
Input Voltage	V_{IN}	-0.5 ~ +7	V
Output Voltage (Active Mode)	V_{OUT}	$V_{CC} + 0.5$	V
V_{CC} or GND Current	I_{CC}	±75	mA
Output Sink Current ($V_{OUT} > -0.5V$)	I_{OUT}	±25	mA
Input Clamp Current ($V_{IN} < -0.5V$)	I_{IK}	-20	mA
Output Clamp Current ($V_{OUT} < -0.5V$)	I_{OK}	±20	mA
Storage Temperature	T_{STG}	-65 ~ + 150	°C

Notes: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
 2. Absolute maximum ratings are those values beyond which the device could be permanently damaged.
 Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	76	°C/W

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}		2.0	5.0	5.5	V
Input Voltage	V_{IN}		0		5.5	V
Output Voltage	V_{OUT}	Active Mode	0		V_{CC}	V
		High-impedance Mode	0		6.0	V
High-Level Input Voltage	V_{IH}	$V_{CC} = 2.0V$	1.5			V
		$V_{CC} = 3.0V$	2.1			V
		$V_{CC} = 5.5V$	3.85			V
Low-Level Input Voltage	V_{IL}	$V_{CC} = 2.0V$			0.5	V
		$V_{CC} = 3.0V$			0.9	V
		$V_{CC} = 5.5V$			1.65	V
Input Transition Rise or Fall Rate	$\Delta t/\Delta v$	$V_{CC} = 3.3 \pm 0.3V$			100	ns/V
		$V_{CC} = 5.0 \pm 0.5V$			20	ns/V
Operating Temperature	T_A		-40	+25	+85	°C

■ STATIC CHARACTERISTICS ($T_A = 25^\circ C$)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
Low-Level Output Voltage	V_{OL}	$I_{OL} = 50\mu A$	$V_{CC} = 2.0V$			0.1	V
			$V_{CC} = 3.0V$			0.1	
			$V_{CC} = 4.5V$			0.1	
		$I_{OL} = 4 mA$	$V_{CC} = 3.0V$			0.36	
		$I_{OL} = 8mA$	$V_{CC} = 4.5V$			0.36	
Input Leakage Current	$I_{I(LEAK)}$	$V_{IN} = 5.5V$ or GND, $V_{CC} = 0V$ to 5.5V			0.1	μA	
3-state Output OFF-state Current	I_{OZ}	$V_{IN} = V_{IH}$ or V_{IL} , $V_{OUT} = V_{CC}$ or GND, $V_{CC} = 5.5V$			±0.25	μA	
Quiescent Supply Current	I_{CC}	$V_{IN} = V_{CC}$ or GND, $I_{OUT} = 0$, $V_{CC} = 5.5V$			2	μA	
Input Capacitance	C_{IN}			1.5	10	pF	

■ SWITCHING CHARACTERISTICS (T_A=25°C)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Propagation Delay, From Input(A) To Output(Y)	t _{PZL}	V _{CC} = 3.3±0.3 V	C _L = 15 pF		3.7	7.0	ns
			C _L = 50 pF		5.2	10.0	
	t _{PLZ}	V _{CC} = 3.3±0.3 V	C _L = 15 pF		4.8	6.4	
			C _L = 50 pF		6.9	10.0	
Propagation Delay, From Input(A) To Output(Y)	t _{PZL}	V _{CC} = 5±0.5 V	C _L = 15 pF		2.7	4.9	ns
			C _L = 50 pF		3.8	7.0	
	t _{PLZ}	V _{CC} = 5±0.5 V	C _L = 15 pF		3.0	4.1	
			C _L = 50 pF		4.3	6.5	


FLYING 汎翔國際有限公司
 www.flying1688.com

■ TEST CIRCUIT AND WAVEFORMS

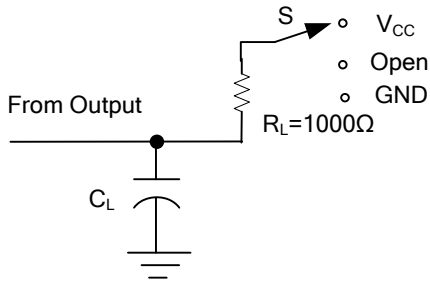

TEST	S
t_{PLH}/t_{PHL}	Open
t_{PHZ}/t_{PZH}	GND
t_{PLZ}/t_{PZL}	V_{CC}

Test circuit for measuring propagation delay

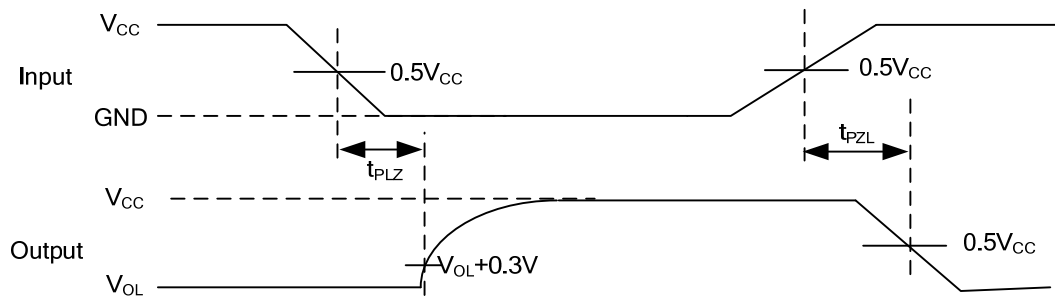

Waveforms showing the Input(A) to Output(Y) propagation delays.

Note: C_L includes probe and jig capacitance.

All input pulses are supplied by generators having the following characteristics: $P_{RR} \leq 1\text{MHz}$, $Z_o = 50\Omega$, $t_r \leq 3\text{ns}$, $t_f \leq 3\text{ns}$.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.