

U74AHC1G66

CMOS IC


BILATERAL SWITCH

■ DESCRIPTION

The UTC **U74AHC1G66** is an analog switch which transmits signals from pin(Y or Z) to pin (Z or Y) with an active HIGH enable input pin (E). When pin E is LOW, the switch is turned off.

■ FEATURES

- * Operation voltage range: 2~5.5V
- * Low power dissipation
- * Very low ON-resistance: 26Ω (typ.) at V_{cc}=3.0V
16Ω (typ.) at V_{cc}=4.5V
14Ω (typ.) at V_{cc}=5.5V

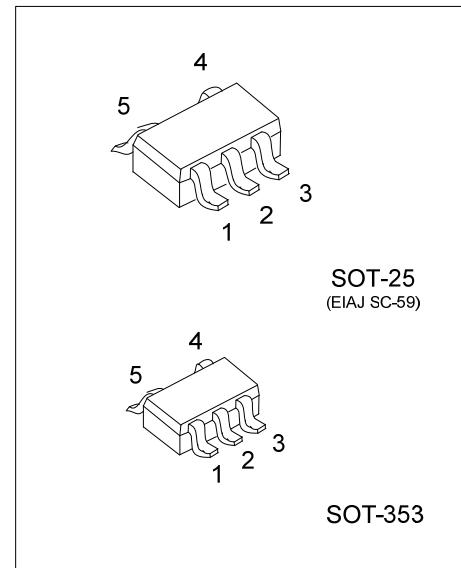


■ ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74AHC1G66L-AF5-R	U74AHC1G66G-AF5-R	SOT-25	Tape Reel
U74AHC1G66L-AL5-R	U74AHC1G66G-AL5-R	SOT-353	Tape Reel

U74AHC1G66G-AF5-R	<ul style="list-style-type: none"> (1)Packing Type (2)Package Type (3)Green Package 	<ul style="list-style-type: none"> (1) R: Tape Reel (2) AF5: SOT-25, AL5: SOT-353 (3) G: Halogen Free and Lead Free, L: Lead Free
-------------------	--	--

■ MARKING

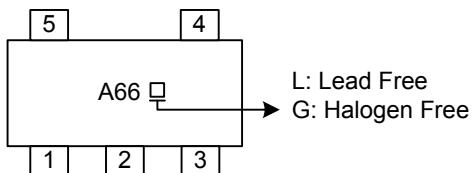

■ PIN CONFIGURATION





■ PIN DESCRIPTION

PIN NO.	SYMBOL	DESCRIPTION
1	Y	independent input/output
2	Z	independent output/input
3	GND	ground
4	E	enable input
5	V _{CC}	supply voltage

■ FUNCTION TABLE (each gate)

INPUT E	SWITCH
H	ON
L	OFF

■ LOGIC DIAGRAM (positive logic)

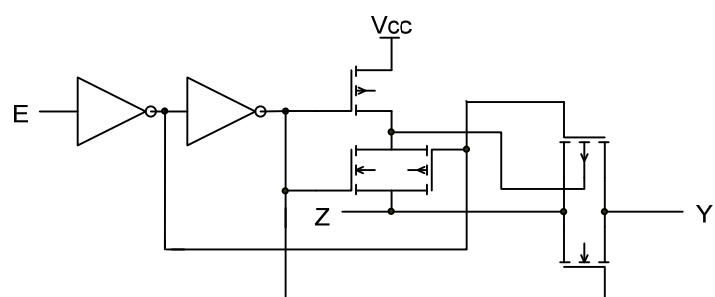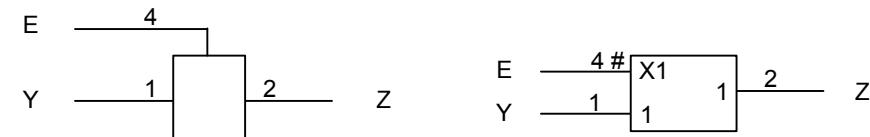

■ ABSOLUTE MAXIMUM RATINGS (unless otherwise specified)(Note 2)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V _{CC}	-0.5~7	V
Enable Input Voltage	V _E	-0.5~7	V
Enable Input Clamp Current	I _{EK}	-20	mA
Switch Diode Current	I _{SK}	±20	mA
On-State Switch Current(-0.5V<V _{OS} <V _{CC} +0.5V)	I _S	±25	mA
V _{CC} or GND Current	I _{CC}	±75	mA
Power Dissipation	P _D	250	mW
Storage Temperature	T _{STG}	-65 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

- The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
- To avoid drawing V_{CC} current out of pin Z, when switch current flows into pin Y, the voltage drop across the bidirectional switch must not exceed 0.4V. If the switch current flows into pin Z, no V_{CC} current will flow out of pin Y. In this case there is no limit for the voltage drop across the switch, but the voltage at pins Y and Z may not exceed V_{CC} or GND.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V _{CC}		2	5.0	5.5	V
Enable Input Voltage	V _E		0		5.5	V
Switch Voltage	V _S		0		V _{CC}	V
Input Transition Rise or Fall Rate	$\frac{\Delta t}{\Delta V}$	V _{CC} =3.3+0.3V V _{CC} =5.0+0.5V			100 20	ns/V
Operating Temperature	T _A		-40	25	125	°C

■ STATIC CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage	High-Level V _{IH}	V _{CC} =2.0V	1.5			V
		V _{CC} =3.0V	2.1			V
		V _{CC} =5.5V	3.85			V
	Low-Level V _{IL}	V _{CC} =2.0V			0.5	V
		V _{CC} =3.0V			0.9	V
		V _{CC} =5.5V			1.65	V
Enable Input Leakage Current	I _{E(LEAK)}	V _{CC} =5.5V, V _E =V _{CC} or GND			0.1	µA
State Switch Current	OFF	V _{CC} =5.5V, V _s =V _{CC} -GND			0.1	µA
	ON	V _{CC} =5.5V			0.1	µA
ON-Resistance (Peak) (Note)	R _{ON(Peak)}	V _{CC} =2.0V, V _{IS} =V _{CC} to GND, I _S =1mA		148		Ω
		V _{CC} =3.0V~3.6V, V _{IS} =V _{CC} to GND, I _S =10mA		28	50	Ω
		V _{CC} =4.5V~5.5V, V _{IS} =V _{CC} to GND, I _S =10mA		15	30	Ω
ON-Resistance (Rail)	R _{ON(Rail)}	V _{CC} =2.0V, V _{IS} =V _{CC} , I _S =1mA		28		Ω
		V _{CC} =2.0V, V _{IS} =GND, I _S =1mA		30		Ω
		V _{CC} =3.0V~3.6V, V _{IS} =V _{CC} , I _S =10mA		18	50	Ω
		V _{CC} =3.0V~3.6V, V _{IS} =GND, I _S =10mA		20	50	Ω
		V _{CC} =4.5V~5.5V, V _{IS} =V _{CC} , I _S =10mA		13	22	Ω
		V _{CC} =4.5V~5.5V, V _{IS} =GND, I _S =10mA		15	22	Ω
Quiescent Supply Current	I _Q	V _{CC} =5.5V, V _E =V _{CC} or GND, V _s =GND or V _{CC} , V _{OS} =V _{CC} or GND			1.0	µA
Enable Input Capacitance	C _E	V _E =V _{CC} or GND		2	10	pF
Maximum Switch Capacitance	C _S	Independent PO		4	10	pF

Note: With supply voltages at or near 2V, the analog switch on-state resistance becomes very nonlinear.

Only digital signals should be transmitted at these low supply voltages.

■ DYNAMIC CHARACTERISTICS ($T_A=25^\circ C$)

Input: $t_R, t_F \leq 3\text{ns}$; PRR $\leq 1\text{MHz}$, All typical values are measured at $V_{CC}=2\text{V}$; $V_{CC}=3.3\text{V}$ or $V_{CC}=5\text{V}$.

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation Delay From Y/Z TO Z/Y	t_{PHL} / t_{PLH}	$V_{CC} = 2.0\text{V}, C_L = 50\text{pF}$		2.2	5	ns
Turn-On Time From E TO Z/Y	t_{PZH} / t_{PZL}	$V_{CC} = 2.0\text{V}, C_L = 15\text{pF}$		7	25	ns
		$V_{CC} = 2.0\text{V}, C_L = 50\text{pF}$		11	35	ns
Turn-Off Time From E TO Z/Y	t_{PHZ} / t_{PLZ}	$V_{CC} = 2.0\text{V}, C_L = 15\text{pF}$		9	25	ns
		$V_{CC} = 2.0\text{V}, C_L = 50\text{pF}$		13	35	ns
Propagation Delay From Y/Z TO Z/Y	t_{PHL} / t_{PLH}	$V_{CC} = 3.0\text{V} \sim 3.6\text{V}, C_L = 50\text{pF}$		1	2	ns
Turn-On Time From E TO Z/Y	t_{PZH} / t_{PZL}	$V_{CC} = 3.0\text{V} \sim 3.6\text{V}, C_L = 15\text{pF}$		4	11	ns
		$V_{CC} = 3.0\text{V} \sim 3.6\text{V}, C_L = 50\text{pF}$		5.8	15	ns
Turn-Off Time From E TO Z/Y	t_{PHZ} / t_{PLZ}	$V_{CC} = 3.0\text{V} \sim 3.6\text{V}, C_L = 15\text{pF}$		6	11	ns
		$V_{CC} = 3.0\text{V} \sim 3.6\text{V}, C_L = 50\text{pF}$		8.4	15	ns
Propagation Delay From Y/Z TO Z/Y	t_{PHL} / t_{PLH}	$V_{CC} = 4.5\text{V} \sim 5.5\text{V}, C_L = 50\text{pF}$		0.6	1	ns
Turn-On From E TO Z/Y	t_{PZH} / t_{PZL}	$V_{CC} = 4.5\text{V} \sim 5.5\text{V}, C_L = 15\text{pF}$		3	8	ns
		$V_{CC} = 4.5\text{V} \sim 5.5\text{V}, C_L = 50\text{pF}$		4.4	11	ns
Turn-Off Time From E TO Z/Y	t_{PHZ} / t_{PLZ}	$V_{CC} = 4.5\text{V} \sim 5.5\text{V}, C_L = 15\text{pF}$		5	8	ns
		$V_{CC} = 4.5\text{V} \sim 5.5\text{V}, C_L = 50\text{pF}$		6.1	11	ns

Recommended conditions and typical values. GND=0; $t_R=t_F=3\text{ns}$

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Sine-Wave Distortion at $f=1\text{kHz}$		$V_{CC}=3.0\text{V} \sim 3.6\text{V}, V_{IS(P-P)}=2.5\text{V}, R_L=10\text{k}\Omega, C_L=50\text{pF}$		0.025		%
		$V_{CC}=4.5\text{V} \sim 5.5\text{V}, V_{IS(P-P)}=4.0\text{V}, R_L=10\text{k}\Omega, C_L=50\text{pF}$		0.015		%
Sine-Wave Distortion at $f=10\text{kHz}$		$V_{CC}=3.0\text{V} \sim 3.6\text{V}, V_{IS(P-P)}=2.5\text{V}, R_L=10\text{k}\Omega, C_L=50\text{pF}$		0.025		%
		$V_{CC}=4.5\text{V} \sim 5.5\text{V}, V_{IS(P-P)}=4.0\text{V}, R_L=10\text{k}\Omega, C_L=50\text{pF}$		0.015		%
Switch OFF Signal Feed-Through (Note 1)		$V_{CC}=3.0\text{V} \sim 3.6\text{V}, R_L=600\Omega, C_L=50\text{pF}, F=1\text{MHz}$		-50		dB
		$V_{CC}=4.5\text{V} \sim 5.5\text{V}, R_L=600\Omega, C_L=50\text{pF}, F=1\text{MHz}$		-50		dB
Minimum Frequency Response (-3dB) (Note 2)	f_{MAX}	$V_{CC}=3.0\text{V} \sim 3.6\text{V}, R_L=50\Omega, C_L=10\text{pF}$		230		MHz
		$V_{CC}=4.5\text{V} \sim 5.5\text{V}, R_L=50\Omega, C_L=10\text{pF}$		280		MHz

OPERATING CHARACTERISTICS

Power Dissipation Capacitance	Cpd	$C_L=50\text{pF}, f=10\text{MHz}, V_{CC}=5$		13		pF
-------------------------------	-----	---	--	----	--	----

Notes: 1. Adjust input voltage V_{IS} is 0dbm level (0dbm=1mW into 600Ω)

2. Adjust input voltage V_{IS} is 0dbm level at V_{OS} for 1MHz (0dbm=1mW into 50Ω)



UNISONIC TECHNOLOGIES CO., LTD
www.unisonic.com.tw

■ TEST CIRCUIT AND WAVEFORMS

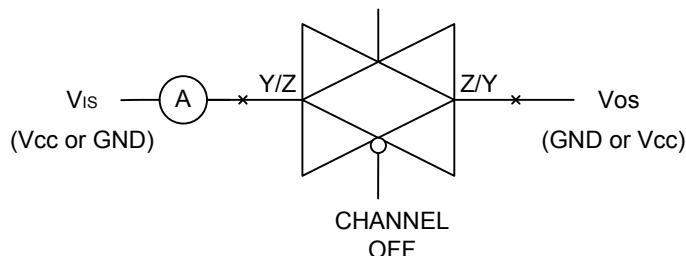


Fig-1 OFF-State Switch Leakage Current Test Circuit

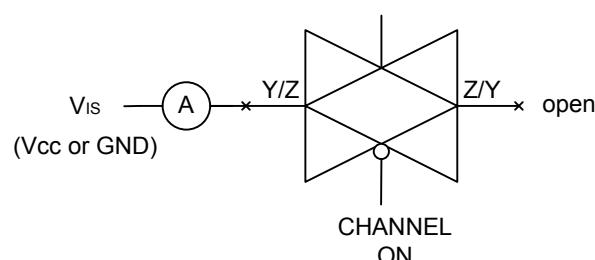


Fig-2 ON-State Leakage Current Test Circuit

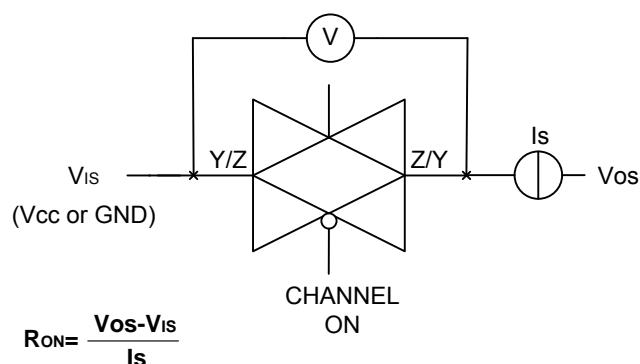


Fig-3 ON-State Resistance Test Circuit

■ TEST CIRCUIT AND WAVEFORMS(Cont.)

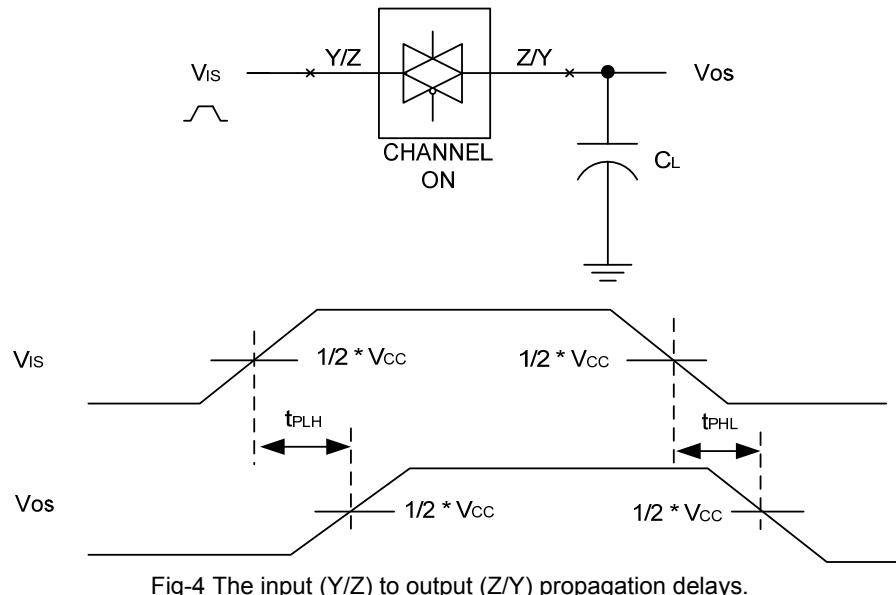


Fig-4 The input (Y/Z) to output (Z/Y) propagation delays.

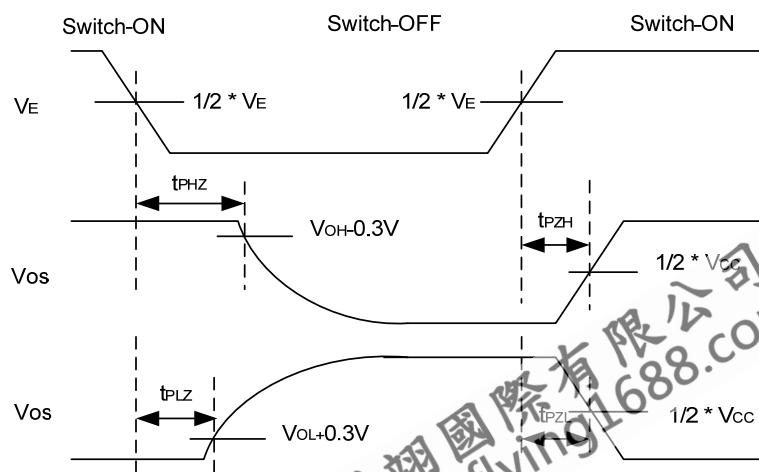
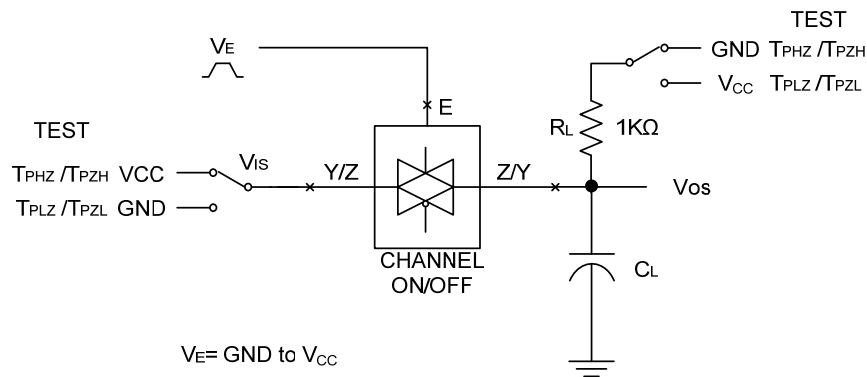


Fig-5 The switch-on and switch-off times.

■ TEST CIRCUIT AND WAVEFORMS(Cont.)

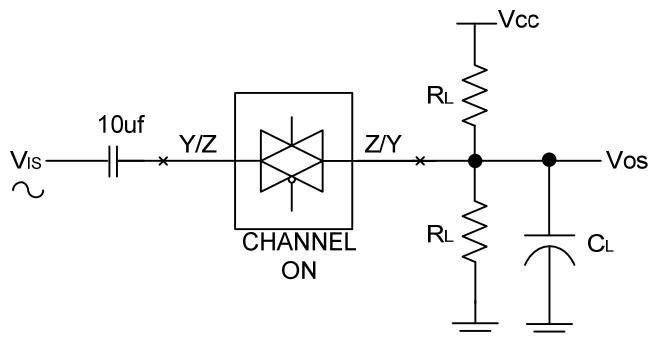


Fig-6 Sine-Wave Distortion

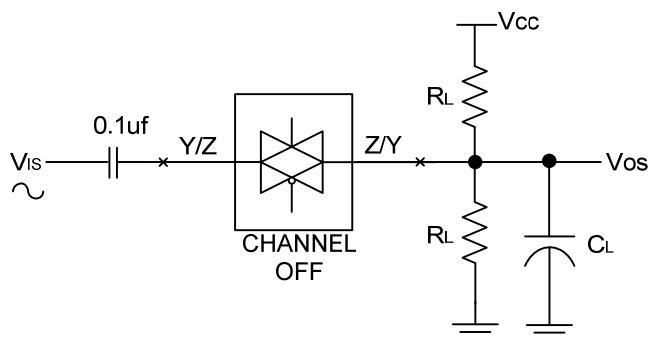


Fig-7 Feed-through Attenuation (Switch OFF)

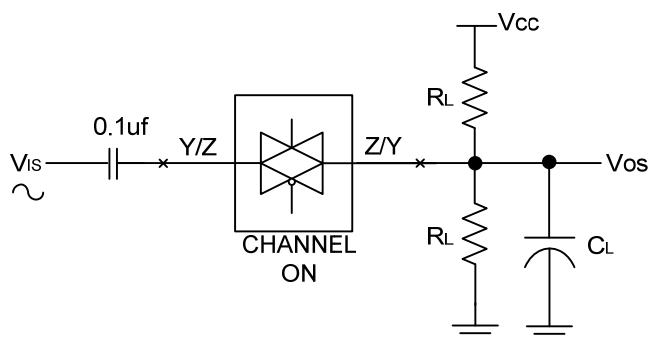


Fig-8 Minimum Frequency Response

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.