



UNISONIC TECHNOLOGIES CO., LTD

**U74LV00**

**CMOS IC**


**QUADRUPLE 2-INPUT  
NAND GATE**

#### ■ DESCRIPTION

The **U74LV00** is designed for 2V to 5.5V  $V_{CC}$  operation.

The **U74LV00** provides the function  $Y=A \bullet B$  or  $Y=\bar{A} + \bar{B}$  in positive logic.

The device is fully specified for partial-power-down applications using  $I_{off}$ . The  $I_{off}$  circuitry disables the outputs, preventing damaging current backflow through the devices when it is powered down.



TSSOP-14

#### ■ FEATURES


- \* 2V to 5.5V  $V_{CC}$  Operation
- \* Max  $t_{PD}$  of 6.5ns at 5V
- \* Typical  $V_{OLP}$  (Output Ground Bounce) < 0.8V at  $V_{CC}=3.3V, T_A=25^\circ C$
- \* Typical  $V_{OHV}$  (output  $V_{OH}$  Undershoot) > 2.3V at  $V_{CC}=3.3V, T_A=25^\circ C$
- \* Support Mixed-Mode Voltage Operation on All Ports
- \*  $I_{off}$  Supports Partial-Power-Down Mode Operation

#### ■ ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free	TSSOP-14	Tape Reel

<p>U74LV00G-P14-R</p>	<p>(1)Packing Type (2)Package Type (3)Green Package</p> <p>(1) R: Tape Reel (2) P14: TSSOP-14 (3) G: Halogen Free and Lead Free, L: Lead Free</p>
-----------------------	---

#### ■ MARKING

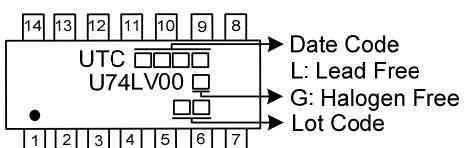

■ PIN CONFIGURATION

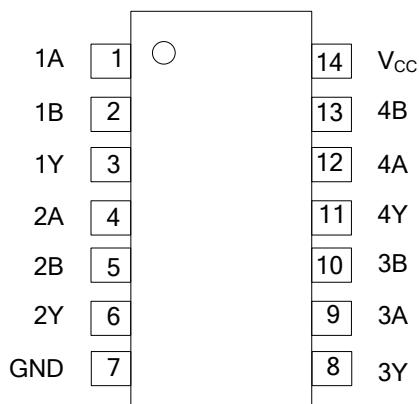


■ FUNCTION TABLE


INPUT(nA)	INPUT(nB)	OUTPUT(nY)
H	H	L
H	L	H
L	H	H
L	L	H

Note: H: HIGH voltage level; L: LOW voltage level.

■ LOGIC DIAGRAM (Positive Logic)

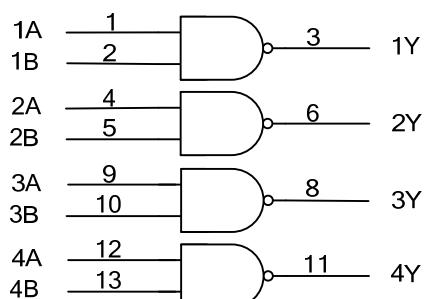

Logic Symbol

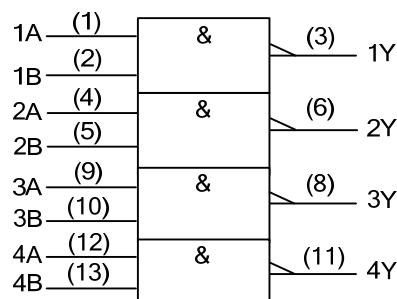

IEC Logic Symbol

### ■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V_{CC}$	-0.5 ~ 7	V
Input Voltage range(see note 2)	$V_{IN}$	-0.5 ~ 7	V
Voltage range applied to any output in the high-impedance or power-off state(see note 2)	$V_O$	-0.5 ~ 7	V
Output Voltage range(see note 2 and 3)	$V_O$	-0.5 ~ $V_{CC}+0.5$	V
Continuous current through $V_{CC}$ or GND	$I_{CC}$	$\pm 50$	mA
Input Clamp Current ( $V_{IN}<0$ )	$I_{IK}$	-20	mA
Output Clamp Current ( $V_{OUT}<0$ or $V_{OUT}>V_{CC}$ )	$I_{OK}$	-50	mA
Continuous output current	$I_O$	$\pm 25$	mA
Storage temperature ranges	$T_{STG}$	-65 ~ +150	°C

Note: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. The input and output negative-voltage ratings may be exceeded if the output current ratings are observed.

3. The value is limited to 5.5V maximum.

### ■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	$\theta_{JA}$	113	°C/W

### ■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	$V_{CC}$	Operating	2		5.5	V
High-Level Input Voltage	$V_{IH}$	$V_{CC}=2V$	1.5			V
		$V_{CC}=2.3V$ to $2.7V$	$V_{CC}\times 0.7$			
		$V_{CC}=3V$ to $3.6V$	$V_{CC}\times 0.7$			
		$V_{CC}=4.5V$ to $5.5V$	$V_{CC}\times 0.7$			
Low-Level Input Voltage	$V_{IL}$	$V_{CC}=2V$		0.5		V
		$V_{CC}=2.3V$ to $2.7V$			$V_{CC}\times 0.3$	
		$V_{CC}=3V$ to $3.6V$			$V_{CC}\times 0.3$	
		$V_{CC}=4.5V$ to $5.5V$			$V_{CC}\times 0.3$	
Input Voltage	$V_{IN}$		0		5.5	V
Output Voltage	$V_{OUT}$		0		$V_{CC}$	V
Input transition rise or fall time	$\Delta t/\Delta v$	$V_{CC}=2.3V$ to $2.7V$			200	ns/V
		$V_{CC}=3V$ to $3.6V$			100	
		$V_{CC}=4.5V$ to $5.5V$			20	
Operating free-air Temperature	$T_A$		-40		85	°C

Note: All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation.

■ ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ C$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-Level Output Voltage	$V_{OH}$	$V_{CC}=2V$ to $5.5V$ , $I_{OH}=-50\mu A$	$V_{CC}-0.1$			V
		$V_{CC}=2.3V$ , $I_{OH}=-2mA$	2			
		$V_{CC}=3V$ , $I_{OH}=-6mA$	2.48			
		$V_{CC}=4.5V$ , $I_{OH}=-12mA$	3.8			
Low-Level Output Voltage	$V_{OL}$	$V_{CC}=2V$ to $5.5V$ , $I_{OL}=50\mu A$			0.1	V
		$V_{CC}=2.3V$ , $I_{OL}=2mA$			0.4	
		$V_{CC}=3V$ , $I_{OL}=6mA$			0.44	
		$V_{CC}=4.5V$ , $I_{OL}=12mA$			0.55	
Input Leakage Current	$I_{I(LEAK)}$	$V_{IN}=5.5V$ or GND, $V_{CC}=0$ to $5.5V$			$\pm 1$	$\mu A$
Quiescent Supply Current	$I_Q$	$V_{IN}=V_{CC}$ or GND, $I_{OUT}=0$ , $V_{CC}=5.5V$			20	$\mu A$
Power OFF Leakage Current	$I_{off}$	$V_{IN}$ or $V_{OUT}=0$ to $5.5V$			5	$\mu A$
Input Capacitance	$C_{IN}$	$V_{IN}=V_{CC}$ or GND, $V_{CC}=3.3V$		3.3		$pF$
		$V_{IN}=V_{CC}$ or GND, $V_{CC}=5V$		3.3		

■ SWITCHING CHARACTERISTICS ( $T_A=25^\circ C$ )

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation Delay From Input (nA or nB) To Output(nY)	$t_{PD}$	$V_{CC}=2.5\pm 0.2V$	$C_L=15pF$		7.1	12.9
			$C_L=50pF$		9.6	16.6
		$V_{CC}=3.3V\pm 0.3V$	$C_L=15pF$		5	7.9
			$C_L=50pF$		6.9	11.4
		$V_{CC}=5\pm 0.5V$	$C_L=15pF$		3.6	5.5
			$C_L=50pF$		4.9	7.5

■ NOISE CHARACTERISTICS ( $T_A=25^\circ C$ ,  $V_{CC}=3.3V$ ,  $C_L=50pF$ )


PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Quiet Output, Maximum Dynamic $V_{OL}$	$V_{OL(P)}$		0.2	0.8	V
Quiet Output, Minimum Dynamic $V_{OL}$	$V_{OL(V)}$		-0.1	-0.8	V
Quiet Output, Minimum Dynamic $V_{OH}$	$V_{OH(V)}$		3.1		V
High-Lelel Dynamic Input Voltage	$V_{IH(D)}$	2.31			V
Low-Level Dynamic Input Voltage	$V_{IL(D)}$			0.99	V

Note: Characteristics are for surface-mount packages only.


■ OPERATING CHARACTERISTICS ( $T_A=25^\circ C$ )

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	$C_{PD}$	$V_{CC}=3.3V$		9.5		$pF$
		$V_{CC}=5V$	$C_L=50pF$ , $f=10MHz$	11		

■ TEST CIRCUIT AND WAVEFORMS

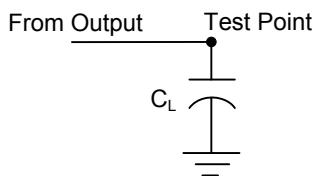

TEST CIRCUIT

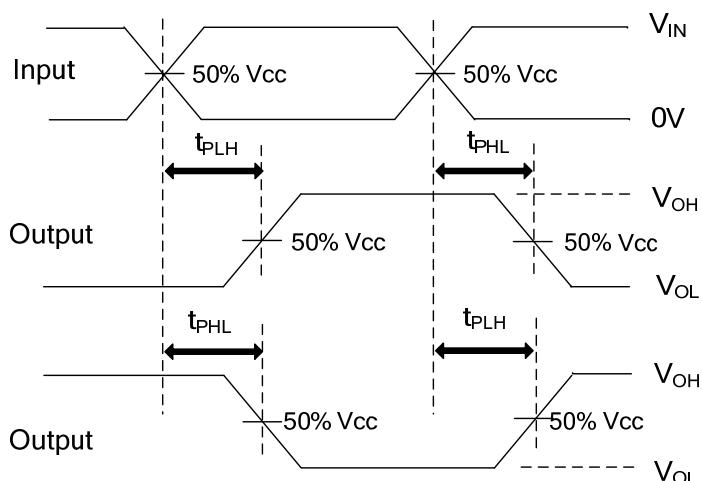

PROPAGATION DELAY TIMES

- Note:
1.  $C_L$  includes probe and jig capacitance.
  2. All input pulses are supplied by generators having the following characteristics:  
PRR  $\leq 1\text{MHz}$ ,  $Z_0=50\Omega$ ,  $t_r \leq 3\text{ns}$ ,  $t_f \leq 3\text{ns}$

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.