



U74LVC17A

CMOS IC

HEX SCHMITT-TRIGGER BUFFER

DESCRIPTION


The UTC **U74LVC17A** is a high-performance, low-power, low-voltage, Si-gate CMOS device and provides six non-inverting buffers with Schmitt trigger action. It is capable for transforming slowly changing input signals into sharply defined, jitter-free output signals.

FEATURES

- * Operate From 1.65V to 5.5V
- * 5 V Tolerant Input/Output For Interfacing With 5 V Logic
- * ±32 mA Output Drive ($V_{CC} = 4.5V$)
- * CMOS Low-Power Consumption And High Noise Immunity
- * I_{OFF} Supports Partial-Power-Down Mode Operation
- * Latch-Up Performance Exceeds 100 mA

ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74LVC17AL-S14-R	U74LVC17AG-S14-R	SOP-14	Tape Reel
U74LVC17AL-P14-R	U74LVC17AG-P14-R	TSSOP-14	Tape Reel

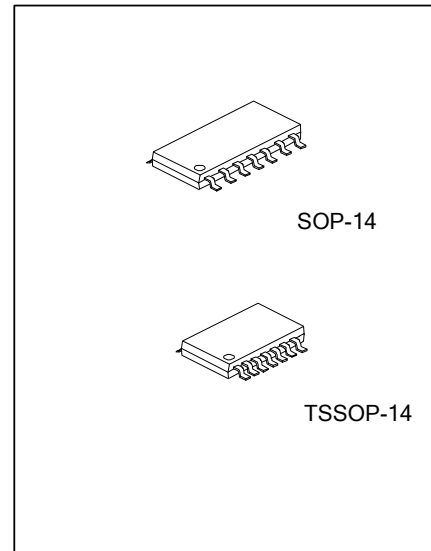


<p>U74LVC17AG-S14-R</p> <ul style="list-style-type: none"> (1) Packing Type (2) Package Type (3) Green Package 	<ul style="list-style-type: none"> (1) R: Tape Reel (2) S14: SOP-14, P14: TSSOP-14 (3) G: Halogen Free and Lead Free, L: Lead Free
---	---

MARKING

SOP-14	TSSOP-14
<p>14 13 12 11 10 9 8 → Date Code UTC □ □ □ □ → L: Lead Free U74LVC17A □ → G: Halogen Free ● □ □ □ → Lot Code 1 2 3 4 5 6 7</p>	<p>14 13 12 11 10 9 8 → Date Code UTC □ □ □ □ → L: Lead Free U74LVC17A □ → G: Halogen Free ● □ □ □ → Lot Code 1 2 3 4 5 6 7</p>



■ PIN CONFIGURATION

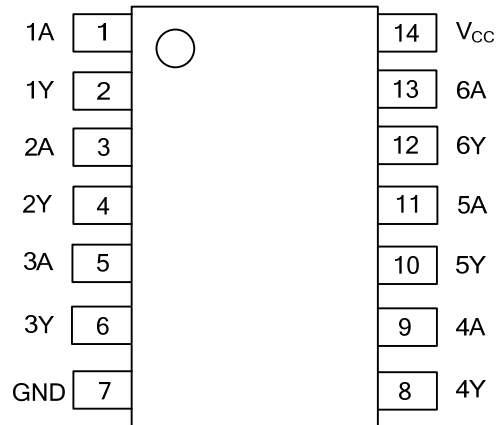


■ FUNCTION TABLE (Each Gate)

INPUT(A)	OUTPUT(Y)
L	L
H	H

Note: H=High level, L=Low Level

■ LOGIC SYMBOL (Each Gate)



FLYING 汎翔國際有限公司
www.flying1688.com

■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	-0.5 ~ 6.5	V
Input Voltage (Note 2)	V_{IN}	-0.5 ~ 6.5	V
Output Voltage (Note 2,3)	High-Impedance	-0.5 ~ 6.5	V
	Power-Off State		
	High State	-0.5 ~ $V_{CC}+0.5$	V
	Low State		
Input Clamp Current	I_{IK}	-50	mA
Output Clamp Current	I_{OK}	-50	mA
Output Current	I_{OUT}	± 50	mA
V_{CC} or GND Current	I_{CC}	± 100	mA
Junction Temperature	T_J	+150	$^{\circ}C$
Storage Temperature	T_{STG}	-65 ~ +150	$^{\circ}C$

- Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
 2. The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.
 3. The value of V_{CC} is provided in the recommended operating conditions table.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}	Operating	1.65		5.5	V
High-Level Input Voltage	V_{T^+}	$V_{CC} = 1.65\text{ V}$	0.70		1.40	V
		$V_{CC} = 2.3\text{ V}$	1.00		1.70	V
		$V_{CC} = 3.0\text{ V}$	1.30		2.20	V
		$V_{CC} = 4.5\text{ V}$	1.90		3.10	V
		$V_{CC} = 5.5\text{ V}$	2.20		3.70	V
Low-Level Input Voltage	V_{T^-}	$V_{CC} = 1.65\text{ V}$	0.30		0.70	V
		$V_{CC} = 2.3\text{ V}$	0.40		1.00	V
		$V_{CC} = 3.0\text{ V}$	0.60		1.30	V
		$V_{CC} = 4.5\text{ V}$	1.10		2.00	V
		$V_{CC} = 5.5\text{ V}$	1.40		2.50	V
Hysteresis Voltage	ΔV_T	$V_{CC} = 1.65\text{ V}$	0.30		0.80	V
		$V_{CC} = 2.3\text{ V}$	0.40		0.90	V
		$V_{CC} = 3.0\text{ V}$	0.40		1.10	V
		$V_{CC} = 4.5\text{ V}$	0.60		1.30	V
		$V_{CC} = 5.5\text{ V}$	0.70		1.40	V
Input Voltage	V_{IN}		0		5.5	V
Output Voltage	V_{OUT}	High or Low State	0		V_{CC}	V
Ambient Operating Temperature	T_{OPR}		-40		85	$^{\circ}C$

Note: All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation.

■ ELECTRICAL CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-Level Output Voltage	V _{OH}	V _{CC} =1.65~5.5V, I _{OH} =-100μA	V _{CC} -0.1			V
		V _{CC} =1.65V, I _{OH} =-4mA	1.20			
		V _{CC} =2.3V, I _{OH} =-8mA	1.90			
		V _{CC} =3.0V, I _{OH} =-16mA	2.40			
		V _{CC} =3.0V, I _{OH} =-24mA	2.30			
		V _{CC} =4.5V, I _{OH} =-32mA	3.80			
Low-Level Output Voltage	V _{OL}	V _{CC} =1.65~5.5V, I _{OL} =100μA			0.10	V
		V _{CC} =1.65V, I _{OL} =4mA			0.45	
		V _{CC} =2.3V, I _{OL} =8mA			0.30	
		V _{CC} =3.0V, I _{OL} =12mA			0.40	
		V _{CC} =3.0V, I _{OL} =24mA			0.55	
		V _{CC} =4.5V, I _{OL} =32mA			0.55	
Input Leakage Current	I _{I(LEAK)}	V _{IN} = 0 to 5.5V, V _{CC} = 0~5.5 V			±5	μA
Power OFF Leakage Current	I _{OFF}	V _{IN} or V _O =5.5V, V _{CC} = 0			±10	μA
Quiescent Supply Current	I _Q	V _{IN} = V _{CC} or GND, I _O = 0, V _{CC} = 1.65~5.5 V			10	μA
Additional Quiescent Supply Current	ΔI _Q	One input at V _{CC} -0.6v, Other inputs at V _{CC} or GND, I _O = 0, V _{CC} = 3~5.5 V			500	μA
Input Capacitance	C _{IN}	V _O = V _{CC} or GND, V _{CC} = 3.3 V		4		pF


■ SWITCHING CHARACTERISTICS (See Test Circuit And Waveforms)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
Propagation Delay nA to nY	t _{PLH} / t _{PHL}	C _L =30pF	V _{CC} =1.8V±0.15V, R _L =1KΩ	3.9		9.3	ns
			V _{CC} =2.5V±0.2V, R _L =500Ω	1.9		5.7	ns
		C _L =50pF	V _{CC} =3.3V±0.3V, R _L =500Ω	2.2		5.4	ns
			V _{CC} =5.0V±0.5V, R _L =500Ω	1.5		4.3	ns

■ OPERATING CHARACTERISTICS (T_A=25°C, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C _{PD}	f=10MHZ	V _{CC} =1.8V		17	pF
			V _{CC} =2.5V		18	pF
			V _{CC} =3.3V		19	pF
			V _{CC} =5V		21	pF

■ TEST CIRCUITS AND WAVEFORMS

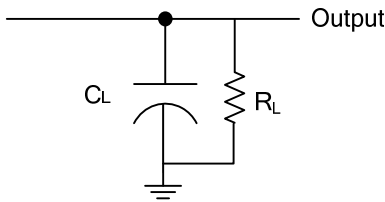

V_{CC}	V_{IN}	t_R, t_F	V_M	C_L	R_L
1.65V~1.95V	V_{CC}	$\leq 2\text{ns}$	$V_{CC}/2$	30pF	1k Ω
2.3V~2.7V	V_{CC}	$\leq 2\text{ns}$	$V_{CC}/2$	30pF	500 Ω
3.0V~3.6V	3V	$\leq 2.5\text{ns}$	1.5V	50pF	500 Ω
4.5V~5.5V	V_{CC}	$\leq 2.5\text{ns}$	$V_{CC}/2$	50pF	500 Ω

Definitions for test circuit: R_L = Load resistance, C_L = Load capacitance including jig and probe capacitance.

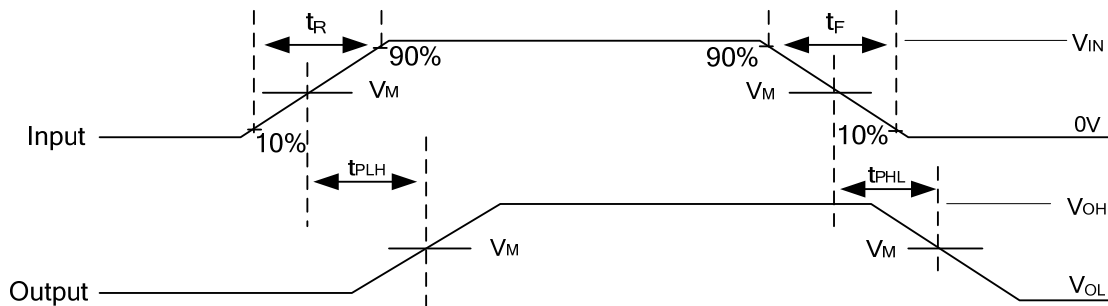

- Notes: 1. V_{OL} and V_{OH} are typical output drop that occur with the output load.
 2. t_{PLH} and t_{PHL} are the same as t_{PD} .

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.