



U74LVC1G08

CMOS IC

2-INPUT AND GATE


DESCRIPTION

The **U74LVC1G08** is a 2-input AND gate which provides the Function $Y=A \times B$.

This device has power-down protective circuit to prevent device form destruction when it is powered down.

FEATURES

- * Operation Voltage Range: 1.6V ~ 5.5V
- * Low Power Current: $I_{CC}=10\mu A$ (Max.)
- * $\pm 24mA$ Output Drive ($V_{CC}=3.0V$)
- * Power Down Protection

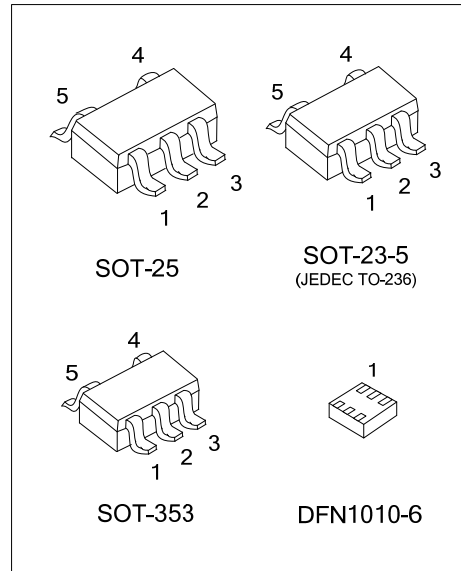

ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74LVC1G08L-AE5-R	U74LVC1G08G-AE5-R	SOT-23-5	Tape Reel
U74LVC1G08L-AF5-R	U74LVC1G08G-AF5-R	SOT-25	Tape Reel
U74LVC1G08L-AL5-R	U74LVC1G08G-AL5-R	SOT-353	Tape Reel
U74LVC1G08L-K06-1010-R	U74LVC1G08G-K06-1010-R	DFN1010-6	Tape Reel


<p>U74LVC1G08G-AE5-R</p>	<p>(1) R: Tape Reel (2) AE5: SOT-23-5, AF5: SOT-25, AL5: SOT-353 K06-1010: DFN1010-6 (3) G: Halogen Free and Lead Free, L: Lead Free</p>
--------------------------	---

MARKING

SOT-23-5 / SOT-25 / SOT-353	DFN1010-6




■ PIN CONFIGURATION

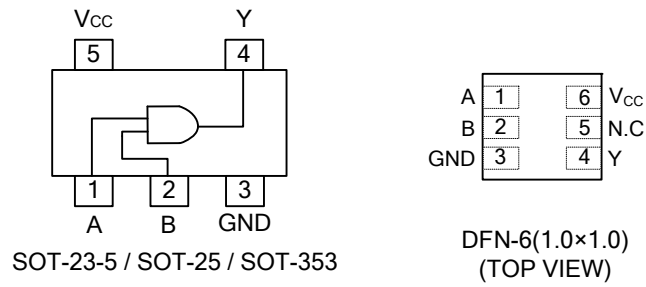

■ FUNCTION TABLE (each gate)

INPUT		OUTPUT
A	B	Y
L	L	L
L	H	L
H	L	L
H	H	H

■ LOGIC DIAGRAM (positive logic)

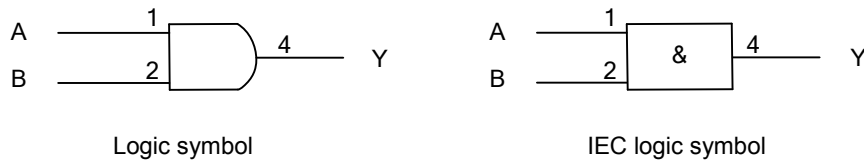

FLYING 汎翔國際有限公司
www.flying1688.com

■ ABSOLUTE MAXIMUM RATING (T_A=25°C, unless otherwise specified) (Note 2)

PARAMETER	SYMBOL	TEST CONDITIONS	RATINGS	UNIT
Supply Voltage	V _{CC}		-0.5~6.5	V
Input Voltage	V _{IN}		-0.5~6.5	V
Output Voltage	V _{OUT}	Output in the high or low state	-0.5~V _{CC} +0.5	V
		Output in the power-off state	-0.5~6.5	V
Continuous V _{CC} or GND Current	I _{CC}		±100	mA
Continuous Output Current	I _{OUT}		±50	mA
Input Clamp Current	I _{IK}	V _{IN} <0	-50	mA
Output Clamp Current	I _{OK}	V _{OUT} <0	-50	mA
Storage Temperature Range	T _{STG}		-65 ~+150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
 2. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	SOT-23-5	280	°C/W
	SOT-25	230	°C/W
	SOT-353	350	°C/W
	DFN1010-6	250	°C/W

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V _{CC}	Operating	1.65		5.5	V
		Data retention only	1.5			V
Input Voltage	V _{IN}		0		5.5	V
Output Voltage	V _{OUT}	High or low state	0		V _{CC}	V
Input Transition Rise or Fall Rate	Δt/Δv	V _{CC} =1.8V±0.15V			20	ns/V
		V _{CC} =2.5V±0.2V				
		V _{CC} =3.3V±0.3V			10	ns/V
		V _{CC} =5V±0.5V			5	ns/V
Operating Temperature	T _A		-40		125	°C

■ STATIC CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-Level Input Voltage	V _{IH}	V _{CC} = 1.65V~1.95V	0.65×V _{CC}			V
		V _{CC} = 2.3V~2.7V	1.7			
		V _{CC} = 3.0V~3.6V	2			
		V _{CC} = 4.5V~5.5V	0.7×V _{CC}			
Low-Level Input Voltage	V _{IL}	V _{CC} = 1.65V~1.95V			0.35×V _{CC}	V
		V _{CC} = 2.3V~2.7V			0.7	
		V _{CC} = 3.0V~3.6V			0.8	
		V _{CC} = 4.5V~5.5V			0.3×V _{CC}	
High-Level Output Voltage	V _{OH}	V _{CC} = 1.65V ~ 5.5V, I _{OH} = -100μA	V _{CC} -0.1			V
		V _{CC} = 1.65V, I _{OH} = -4mA	1.2			
		V _{CC} = 2.3V, I _{OH} = -8mA	1.9			
		V _{CC} = 3.0V, I _{OH} = -16mA	2.4			
		V _{CC} = 3.0V, I _{OH} = -24mA	2.3			
		V _{CC} = 4.5V, I _{OH} = -32mA	3.8			

■ STATIC CHARACTERISTICS (Cont.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Low-Level Output Voltage	V_{OL}	$V_{CC}=1.65V \sim 5.5V, I_{OL}=100\mu A$			0.1	V
		$V_{CC}=1.65V, I_{OL}=4mA$			0.45	
		$V_{CC}=2.3V, I_{OL}=8mA$			0.3	
		$V_{CC}=3.0V$ $I_{OL}=16mA$ $I_{OL}=24mA$			0.4 0.55	
		$V_{CC}=4.5V, I_{OL}=32mA$			0.55	
Input Leakage Current	$I_{I(LEAK)}$	$V_{CC}=0V \sim 5.5V, V_{IN}=5.5V$ or GND			± 5	μA
Power OFF Leakage Current	I_{OFF}	$V_{CC}=0V, V_{IN}$ or $V_{OUT}=5.5V$			± 10	μA
Quiescent Supply Current	I_Q	$V_{CC}=1.65V \sim 5.5V, V_{IN}=5.5V$ or GND $I_{OUT}=0$			10	μA
Additional Quiescent Supply Current	ΔI_Q	$V_{CC}=3V \sim 5.5V$, One input at $V_{CC}-0.6V$, other inputs at V_{CC} or GND			500	μA
Input Capacitance	C_{IN}	$V_{CC}=3.3V, V_{IN}=V_{CC}$ or GND		4		pF


■ DYNAMIC CHARACTERISTICS ($T_A=25^\circ C$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
Propagation delay from input (A or B) to output(Y)	t_{PLH}/t_{PHL}	$C_L=15pF$	$V_{CC}=1.8V \pm 0.15V$	1.5		7.2	ns
			$V_{CC}=2.5V \pm 0.2V$	0.7		4.4	ns
			$V_{CC}=3.3V \pm 0.3V$	0.8		3.6	ns
			$V_{CC}=5V \pm 0.5V$	0.8		3.4	ns
		$C_L=30$ or $50pF$	$V_{CC}=1.8V \pm 0.15V$	2.4		8	ns
			$V_{CC}=2.5V \pm 0.2V$	1.1		5.5	ns
			$V_{CC}=3.3V \pm 0.3V$	1		4.5	ns
			$V_{CC}=5V \pm 0.5V$	1		4	ns

■ OPERATING CHARACTERISTICS ($f=10MHz, T_A=25^\circ C$, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C_{PD}	$V_{CC}=1.8V$		21		pF
		$V_{CC}=2.5V$		24		pF
		$V_{CC}=3.3V$		26		pF
		$V_{CC}=5V$		31		pF

■ TEST CIRCUIT AND WAVEFORMS

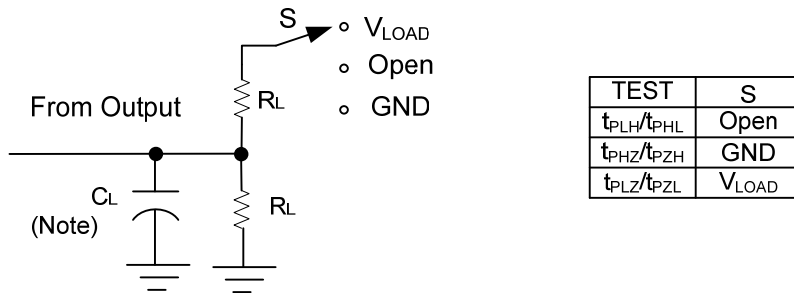

Note: C_L includes probe and jig capacitance.

V_{CC}	V_{IN}	t_R/t_F	V_M	V_{LOAD}	C_L	R_L	V_{Δ}
$1.8V \pm 0.15V$	V_{CC}	$\leq 2ns$	$V_{CC}/2$	$2 \times V_{CC}$	15pF	1M Ω	0.15V
$2.5V \pm 0.2V$	V_{CC}	$\leq 2ns$	$V_{CC}/2$	$2 \times V_{CC}$	15pF	1M Ω	0.15V
$3.3V \pm 0.3V$	3 V	$\leq 2.5ns$	1.5V	6V	15pF	1M Ω	0.3V
$5V \pm 0.5V$	V_{CC}	$\leq 2.5ns$	$V_{CC}/2$	$2 \times V_{CC}$	15pF	1M Ω	0.3V
$1.8V \pm 0.15V$	V_{CC}	$\leq 2ns$	$V_{CC}/2$	$2V_{CC}$	30pF	1K Ω	0.15V
$2.5V \pm 0.2V$	V_{CC}	$\leq 2ns$	$V_{CC}/2$	$2 \times V_{CC}$	30pF	500 Ω	0.15V
$3.3V \pm 0.3V$	3 V	$\leq 2.5ns$	1.5V	6V	50pF	500 Ω	0.3V
$5V \pm 0.5V$	V_{CC}	$\leq 2.5ns$	$V_{CC}/2$	$2 \times V_{CC}$	50pF	500 Ω	0.3V

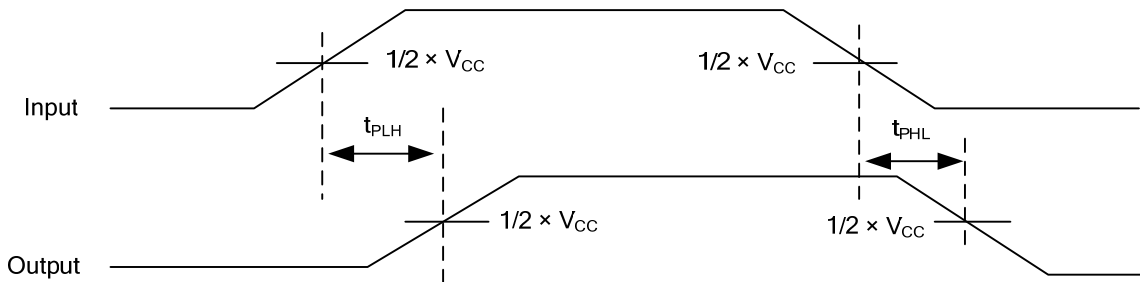

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.