


**U74LVC1G32****CMOS IC****SINGLE 2-INPUT POSITIVE-OR GATE****■ DESCRIPTION**

The **U74LVC1G32** is a single 2-input OR gate which provides the Function  $Y=A+B$  in positive logic circuit.

This device has power-down protective circuit to prevent the device from destruction when it is powered down.


**■ FEATURES**

- \* Operation Voltage Range: 1.6V ~ 5.5V
- \* Low Power Current:  $I_{cc}=10\mu A$  (Max.)
- \*  $\pm 24mA$  Output Drive ( $V_{cc}=3.0V$ )
- \* Power Down Protection

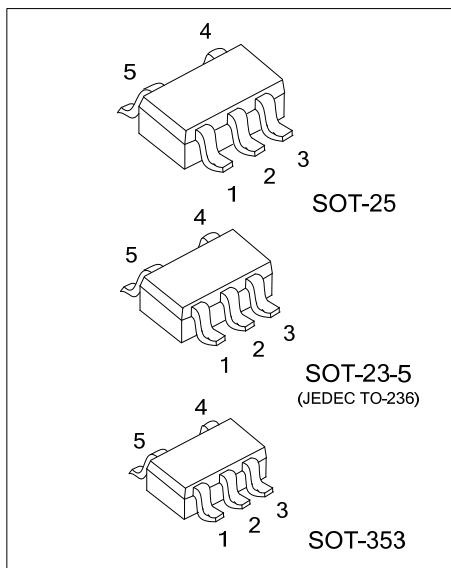
**■ ORDERING INFORMATION**

Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74LVC1G32L-AE5-R	U74LVC1G32G-AE5-R	SOT-23-5	Tape Reel
U74LVC1G32L-AF5-R	U74LVC1G32G-AF5-R	SOT-25	Tape Reel
U74LVC1G32L-AL5-R	U74LVC1G32G-AL5-R	SOT-353	Tape Reel

U74LVC1G32G-AF5-R 	(1)Packing Type (2)Package Type (3)Green Package	(1) R: Tape Reel (2) AE5: SOT-23-5, AF5: SOT-25, AL5: SOT-353 (3) G: Halogen Free and Lead Free, L: Lead Free
-----------------------	--------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------

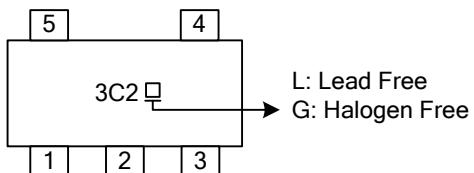**■ MARKING**

## ■ PIN CONFIGURATION




## ■ FUNCTION TABLE


INPUT(A)	INPUT(B)	OUTPUT(Y)
H	X	H
X	H	H
L	L	L

Note: H: HIGH voltage level; L: LOW voltage level; X: Don't care.

## ■ LOGIC DIAGRAM (Positive Logic)

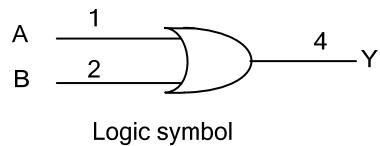

Logic symbol

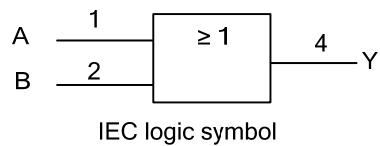

IEC logic symbol

### ■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	TEST CONDITIONS	RATINGS	UNIT
Supply Voltage	$V_{CC}$		-0.5 ~ +6.5	V
Input Voltage	$V_{IN}$		-0.5 ~ +6.5	V
Output Voltage	$V_{OUT}$	Output in the high or low state	-0.5 ~ $V_{CC}+0.5$	V
		Output in the high-impedance or power-off state	-0.5 ~ +6.5	V
$V_{CC}$ or GND Current	$I_{CC}$		$\pm 100$	mA
Continuous Output Current	$I_{OUT}$	$V_{OUT}=0 \sim V_{CC}$	$\pm 50$	mA
Input Clamp Current	$I_{IK}$	$V_{IN}<0$	-50	mA
Output Clamp Current	$I_{OK}$	$V_{OUT}<0$	-50	mA
Operating Temperature	$T_{OPR}$		-40 ~ + 125	°C
Storage Temperature	$T_{STG}$		-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

### ■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junctions to Ambient	SOT-23-5	280	°C/W
	SOT-25	230	
	SOT-353	350	

### ■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	$V_{CC}$	Operating	1.65		5.5	V
		Data retention only	1.5			V
Input Voltage	$V_{IN}$		0		5.5	V
Output Voltage	$V_{OUT}$	High or low state	0		$V_{CC}$	V
Input Transition Rise or Fall Rate	$\Delta t/\Delta v$	$V_{CC}=1.8V\pm 0.15V$			20	ns/V
		$V_{CC}=2.5V\pm 0.2V$			10	ns/V
		$V_{CC}=3.3V\pm 0.3V$			5	ns/V
		$V_{CC}=5V\pm 0.5V$				
Operating Temperature	$T_A$		-40		125	°C

■ ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-Level Input Voltage	$V_{IH}$	$V_{CC}=1.65\text{V} \sim 1.95\text{V}$	$0.65 \times V_{CC}$			V
		$V_{CC}=2.3\text{V} \sim 2.7\text{V}$	1.7			V
		$V_{CC}=3\text{V} \sim 3.6\text{V}$	2			V
		$V_{CC}=4.5\text{V} \sim 5.5\text{V}$	$0.7 \times V_{CC}$			V
Low-Level Input Voltage	$V_{IL}$	$V_{CC}=1.65\text{V} \sim 1.95\text{V}$		$0.35 \times V_{CC}$		V
		$V_{CC}=2.3\text{V} \sim 2.7\text{V}$		0.7		V
		$V_{CC}=3\text{V} \sim 3.6\text{V}$		0.8		V
		$V_{CC}=4.5\text{V} \sim 5.5\text{V}$		$0.3 \times V_{CC}$		V
High-Level Output Voltage	$V_{OH}$	$V_{CC}=1.65 \sim 5.5\text{V}, I_{OH}=-100\mu\text{A}$	$V_{CC}-0.1$			V
		$V_{CC}=1.65\text{V}, I_{OH}=-4\text{mA}$	1.2			V
		$V_{CC}=2.3\text{V}, I_{OH}=-8\text{mA}$	1.9			V
		$V_{CC}=3.0\text{V}$	$I_{OH}=-16\text{mA}$	2.4		V
			$I_{OH}=-24\text{mA}$	2.3		V
Low-Level Output Voltage	$V_{OL}$	$V_{CC}=4.5\text{V}, I_{OH}=-32\text{mA}$	3.8			V
		$V_{CC}=1.65 \sim 5.5\text{V}, I_{OL}=100\mu\text{A}$			0.1	V
		$V_{CC}=1.65\text{V}, I_{OL}=4\text{mA}$			0.45	V
		$V_{CC}=2.3\text{V}, I_{OL}=8\text{mA}$			0.3	V
		$V_{CC}=3.0\text{V}$	$I_{OL}=16\text{mA}$		0.4	V
			$I_{OL}=24\text{mA}$		0.55	V
		$V_{CC}=4.5\text{V}, I_{OL}=32\text{mA}$			0.55	V
Input Leakage Current	$I_{I(LEAK)}$	$V_{CC}=0 \sim 5.5\text{V}, V_{IN}=5.5\text{V}$ or GND			$\pm 5$	$\mu\text{A}$
Power OFF Leakage Current	$I_{OFF}$	$V_{CC}=0\text{V}, V_{IN}$ or $V_{OUT}=5.5\text{V}$			$\pm 10$	$\mu\text{A}$
Quiescent Supply Current	$I_Q$	$V_{CC}=1.65 \sim 5.5\text{V}, V_{IN}=5.5\text{V}$ or GND, $I_{OUT}=0$			10	$\mu\text{A}$
Additional Quiescent Supply Current Per Input Pin	$\Delta I_Q$	$V_{CC}=3 \sim 5.5\text{V}$ , One input at $V_{CC}-0.6\text{V}$ , Other inputs at $V_{CC}$ or GND			500	$\mu\text{A}$
Input Capacitance	$C_{IN}$	$V_{CC}=3.3\text{V}, V_{IN}=V_{CC}$ or GND		4		pF


■ SWITCHING CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation delay from input (A) to output(Y)	$t_{PLH} / t_{PHL}$	$V_{CC}=1.8 \pm 0.15\text{V}$	1.9		7.2	ns
		$V_{CC}=2.5 \pm 0.2\text{V}$	0.8		4.4	ns
		$V_{CC}=3.3 \pm 0.3\text{V}$	0.9		3.6	ns
		$V_{CC}=5 \pm 0.5\text{V}$	0.8		3.4	ns
		$C_L=15\text{pF}, R_L=1\text{M}\Omega$	$V_{CC}=1.8 \pm 0.15\text{V}$	2.8		8
		$C_L=30\text{pF}, R_L=1\text{K}\Omega$	$V_{CC}=2.5 \pm 0.2\text{V}$	1.2		5.5
		$C_L=30\text{pF}, R_L=500\Omega$	$V_{CC}=3.3 \pm 0.3\text{V}$	1.1		4.5
		$C_L=50\text{pF}, R_L=500\Omega$	$V_{CC}=5 \pm 0.5\text{V}$	1		4
						ns
						ns

■ OPERATING CHARACTERISTICS ( $f=10\text{MHz}, T_A = 25^\circ\text{C}$ , unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	$C_{PD}$	$V_{CC}=1.8\text{V}$		20		pF
		$V_{CC}=2.5\text{V}$		20		pF
		$V_{CC}=3.3\text{V}$		21		pF
		$V_{CC}=5\text{V}$		22		pF

■ TEST CIRCUIT AND WAVEFORMS

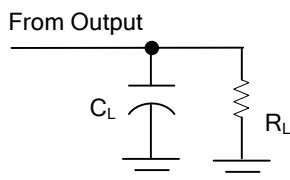

TEST CIRCUIT

$V_{CC}$	INPUTS		$V_M$	$C_L$	$R_L$
	$V_{IN}$	$t_R, t_F$			
$1.8V \pm 0.15V$	$V_{CC}$	$\leq 2ns$	$V_{CC}/2$	$15pF$	$1M\Omega$
$2.5V \pm 0.2V$	$V_{CC}$	$\leq 2ns$	$V_{CC}/2$	$15pF$	$1M\Omega$
$3.3V \pm 0.3V$	$3V$	$\leq 2.5ns$	$1.5V$	$15pF$	$1M\Omega$
$5V \pm 0.5V$	$V_{CC}$	$\leq 2.5ns$	$V_{CC}/2$	$15pF$	$1M\Omega$
$1.8V \pm 0.15V$	$V_{CC}$	$\leq 2ns$	$V_{CC}/2$	$30pF$	$1K\Omega$
$2.5V \pm 0.2V$	$V_{CC}$	$\leq 2ns$	$V_{CC}/2$	$30pF$	$500\Omega$
$3.3V \pm 0.3V$	$3V$	$\leq 2.5ns$	$1.5V$	$50pF$	$500\Omega$
$5V \pm 0.5V$	$V_{CC}$	$\leq 2.5ns$	$V_{CC}/2$	$50pF$	$500\Omega$

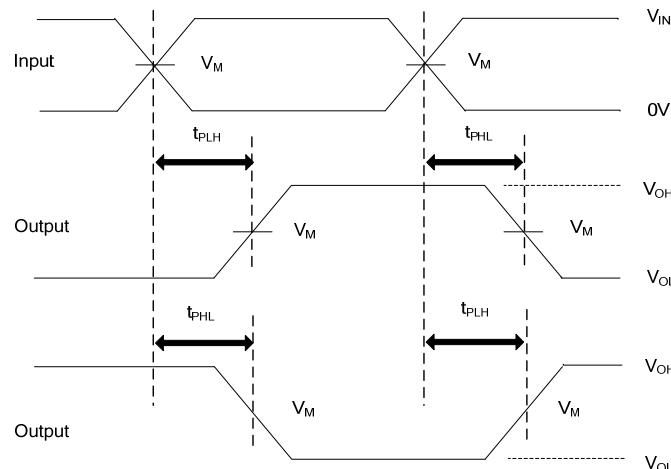

PROPAGATION DELAY TIMES

Notes: 1.  $C_L$  includes probe and jig capacitance.

2. All input pulses are supplied by generators having the following characteristics:  $P_{RR} \leq 10MHz$ ,  $Z_0 = 50\Omega$ .

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.