



## UBCR308

TRIAC

### 8A TRIAC

#### DESCRIPTION



The UTC **UBCR308** is an 8A standard triac.

The UTC **UBCR308** is suitable for use in inversion operation of capacitor motor, washing machine and other general controlling devices.

#### FEATURES

- \*  $I_{T(RMS)}$ : 8A
- \*  $V_{DRM}$ : 700V
- \*  $I_{FGT}$ ,  $I_{RGT}$ ,  $I_{RGTIII}$ : 30mA

#### SYMBOL

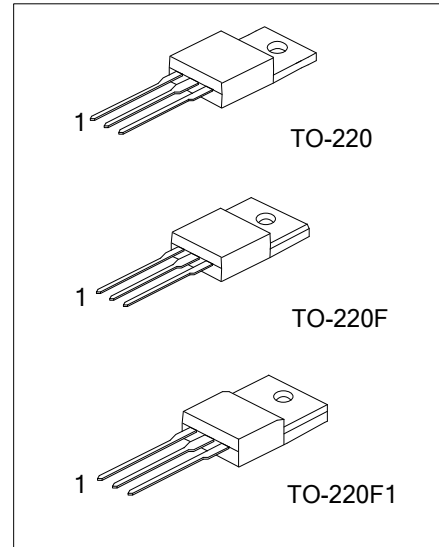


#### ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UBCR308L-x-TA3-T	UBCR308G-x-TA3-T	TO-220	MT1	MT2	G	Tube
UBCR308L-x-TF1-T	UBCR308G-x-TF1-T	TO-220F1	MT1	MT2	G	Tube
UBCR308L-x-TF3-T	UBCR308G-x-TF3-T	TO-220F	MT1	MT2	G	Tube

Note: Pin Assignment: MT1: MT1 MT2: MT2 G: Gate

<p>UBCR308G-x-TA3-T</p> <p>(1) Packing Type (2) Package Type (3) <math>V_{DRM}</math> (4) Green Package</p>	<p>(1) T: Tube (2) TA3: TO-220, TF3: TO-220F, TF1: TO-220F1 (3) 7: 700V (4) G: Halogen Free and Lead Free, L: Lead Free</p>
---	---

#### MARKING

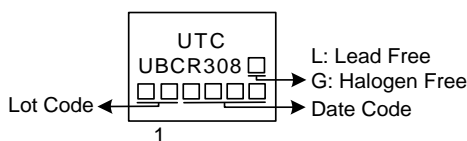

## ■ ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub>=25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Repetitive Peak Off-State Voltage (Note)	V <sub>DRM</sub> / V <sub>RRM</sub>	700	V
On-State RMS Current (Commercial Frequency, Sine Full Wave 360° Conduction, T <sub>C</sub> =88°C)	I <sub>T(RMS)</sub>	8	A
Surge On-State Current (60Hz Sinewave 1 Full Cycle, Peak Value, Non-Repetitive)	I <sub>TSM</sub>	80	A
I <sup>2</sup> t for Fusing (Value Corresponding to 1 Cycle of Half Wave 60Hz, Surge On-State Current)	I <sup>2</sup> t	26	A <sup>2</sup> s
Peak Gate Current	I <sub>GM</sub>	2	A
Peak Gate Power Dissipation	P <sub>GM</sub>	5	W
Average Gate Power Dissipation	P <sub>G(AV)</sub>	0.5	W
Peak Gate Voltage	V <sub>GM</sub>	10	V
Isolation Voltage (Note)	V <sub>ISO</sub>	2000	V
Operating Junction Temperature	T <sub>J</sub>	-40 ~ +125	°C
Storage Junction Temperature	T <sub>STG</sub>	-40 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

## ■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Case	TO-220	2.0	°C/W
	TO-220F/TO-220F1	3.7	°C/W

The contact thermal resistance  $\theta_{CF}$  in case of greasing is 0.5°C/W.

## ■ ELECTRICAL CHARACTERISTICS (T<sub>J</sub>=25 °C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Repetitive Peak Off-State Current	I <sub>DRM</sub>	T <sub>J</sub> =125°C, V <sub>DRM</sub> Applied			2.0	mA
On-State Voltage	V <sub>TM</sub>	T <sub>C</sub> =25°C, I <sub>TM</sub> =12A, Instantaneous Measurement			1.6	V
Gate Trigger Voltage (Note 2)	V <sub>GT</sub>	T <sub>J</sub> =25°C, V <sub>D</sub> =6V, R <sub>L</sub> = 6Ω, R <sub>G</sub> =330Ω	T2+G+		1.5	V
			T2+G-		1.5	V
			T2-G-		1.5	V
Gate Trigger Current (Note 2)	I <sub>GT</sub>	T <sub>J</sub> =25°C, V <sub>D</sub> =6V, R <sub>L</sub> = 6Ω, R <sub>G</sub> =330Ω	T2+G+		30 (Note 4)	mA
			T2+G-		30 (Note 4)	mA
			T2-G-		30 (Note 4)	mA
Gate Non-Trigger Voltage	V <sub>GD</sub>	T <sub>J</sub> =125°C, V <sub>D</sub> =1/2 V <sub>DRM</sub>	0.2			V
Critical Rate of Rise of Off-State commutation Voltage (Note 3)	(dv/dt) <sub>c</sub>	T <sub>J</sub> =125°C	10			V/μs


Notes: 1. Gate open.

2. Measurement using the gate trigger characteristics measurement circuit.

3. Test conditions of the critical-rate of rise of off-state commutation voltage is shown in the table below.


4. High sensitivity (I<sub>GT</sub>≤20mA) is also available. (I<sub>GT</sub> item: 1)

■ **COMMUTATING VOLTAGE AND CURRENT WAVEFORMS (INDUCTIVE LOAD)**

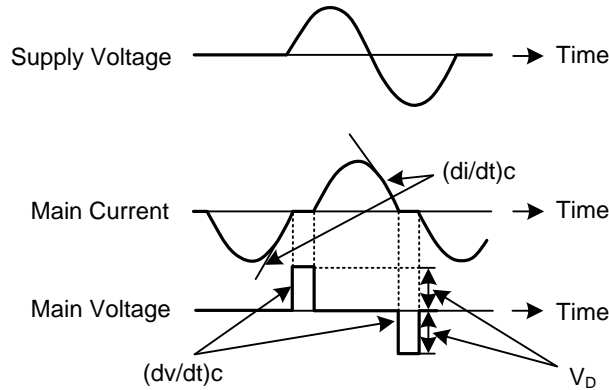

- Test conditions:
1. Junction temperature:  $T_J=125^{\circ}\text{C}$
  2. Rate of decay of on-state commutating current:  $(di/dt)_c=-4.0\text{A/ms}$
  3. Peak off-state voltage:  $V_D=400\text{V}$

■ **TEST CIRCUITS**

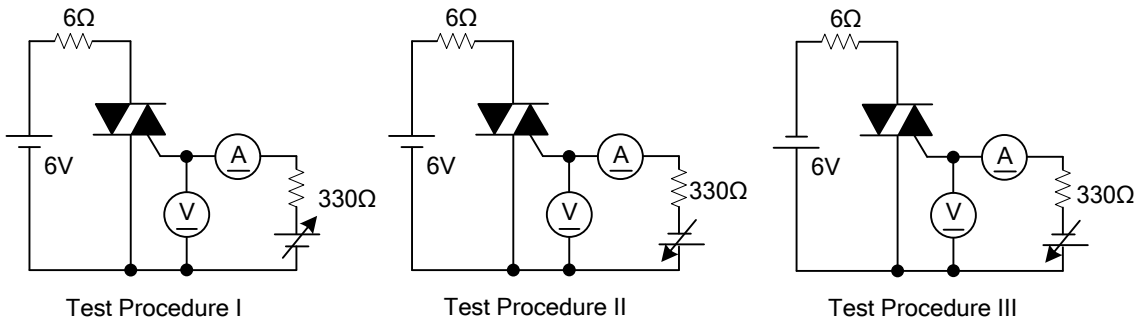

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.