UP2790

Power MOSFET

SWITCHING N- AND P-CHANNEL POWER MOSFET



SOP-8

■ DESCRIPTION

The UTC **UP2790** uses advanced technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with low gate voltages. This device is suitable for use in Motor Drive application.

■ FEATURES

* Low on-state resistance:
  N-channel: V_{GS} =10V, I_D=3A; $R_{DS(ON)}$ = 28 mΩ (Max.)
  V_{GS}=4.5V, I_D=3A; $R_{DS(ON)}$ = 40 mΩ (Max.)
  P-channel: V_{GS}= -10V, I_D=-3A; $R_{DS(ON)}$ = 60 mΩ (Max.)
  V_{GS}=-4.5V, I_D=-3A; $R_{DS(ON)}$ = 80 mΩ (Max.)
* Low input capacitance
  N-channel : C_{ISS} with 500 pF (Typ.)
  P-channel : C_{ISS} with 460 pF (Typ.)
* Built-in gate protection diode

■ SYMBOL

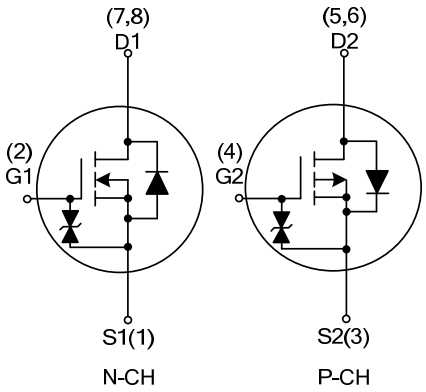

■ ORDERING INFORMATION

Ordering Number	Package	Pin Assignment								Packing
		1	2	3	4	5	6	7	8	
UP2790G-S08-R	SOP-8	S	G	S	G	D	D	D	D	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

UP2790G-S08-R
(1) Packing Type
(2) Package Type
(3) Green Package

(1) R: Tape Reel
(2) S08: SOP-8
(3) G: Halogen Free and Lead Free

Copyright © 2014 Unisonic Technologies Co., Ltd

■ MARKING



■ PIN CONFIGURATION

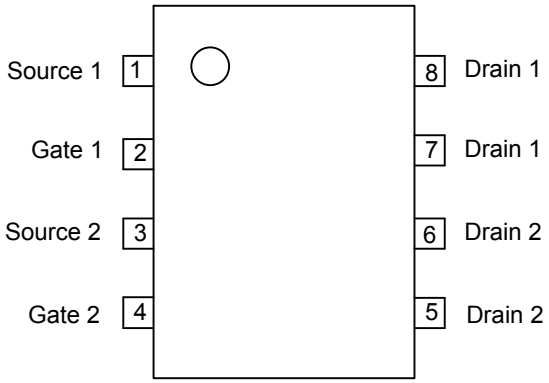

■ ABSOLUTE MAXIMUM RATINGS (T_A =25°C, unless otherwise specified)

N-Channel

PARAMETER	SYMBOL	RATINGS	UNIT
Drain to Source Voltage (V_{GS}=0V)	V_{DSS}	30	V
Gate to Source Voltage (V_{DS}=0V)	V_{GSS}	±20	V
Continuous Drain Current	I_D	6	A
Pulsed Drain Current (Note 2)	I_{DM}	24	A
Single Avalanche Current (Note 3)	I_{AS}	6	A
Single Avalanche Energy (Note 3)	E_{AS}	3.6	mJ
Power Dissipation (Note 4)	P_D	1.7	W
Junction Temperature	T_J	+150	°C
Storage Temperature	T_{STG}	-55 ~ +150	°C

P-Channel

PARAMETER	SYMBOL	RATINGS	UNIT
Drain to Source Voltage (V_{GS}=0V)	V_{DSS}	-30	V
Gate to Source Voltage (V_{DS}=0V)	V_{GSS}	±20	V
Drain Current (DC)	I_D	-6	A
Pulsed Drain Current (Note 2)	I_{DM}	-24	A
Single Avalanche Current (Note 3)	I_{AS}	-6	A
Single Avalanche Energy (Note 3)	E_{AS}	3.6	mJ
Power Dissipation (Note 4)	P_D	1.7	W
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. P_W≤10 μs, Duty Cycle≤1%

3. Mounted on ceramic substrate of 2000 mm^2 x 1.6 mm

4. L = 0.1mH, VDD = $\frac{1}{2}$ x V_{DSS}, RG = 25 Ω, Starting TJ = 25°C

■ ELECTRICAL CHARACTERISTICS (T_A =25°C, unless otherwise specified)

N-Channel

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}=0V, I_D=250uA	30			V
Drain-Source Leakage Current	I_{DSS}	V_{DS} =30 V, V_{GS} =0 V			10	μA
Gate- Source Leakage Current	I_{GSS}	V_{GS} = ±16 V, V_{DS}=0 V			±10	μA
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{GS(TH)}$	V_{DS} =10V, I_D =1mA	1.5		2.5	V
Static Drain-Source On-State Resistance (Note)	$R_{DS(ON)}$	V_{GS} =10 V, I_D =3 A		21	28	mΩ
		V_{GS} =4.5 V, I_D =3 A		28	40	mΩ
		V_{GS} =4.0 V, I_D =3 A		34	53	mΩ
DYNAMIC PARAMETERS						
Input Capacitance	C_{ISS}	V_{DS} =10 V, V_{GS} =0 V, f=1MHz		500		pF
Output Capacitance	C_{OSS}			135		pF
Reverse Transfer Capacitance	C_{RSS}			77		pF
SWITCHING PARAMETERS						
Turn-ON Delay Time	$t_{D(ON)}$	V_{DD}=15V, V_{GS}=10 V, I_D=3 A, R_G=10 Ω		9.2		ns
Turn-ON Rise Time	t_R			8.8		ns
Turn-OFF Delay Time	$t_{D(OFF)}$			28		ns
Turn-OFF Fall-Time	t_F			7.4		ns
Total Gate Charge	Q_G	V_{DD} =24 V, V_{GS} =10 V, I_D =6 A		12.6		nC
Gate to Source Charge	Q_{GS}			1.7		nC
Gate to Drain Charge	Q_{GD}			3.8		nC
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Drain-Source Diode Forward Voltage	V_{SD}	I_S = 6 A, V_{GS} =0V (Note)		0.85		V
Diode Continuous Forward Current	I_S				6	A
Diode Pulse Current	I_{SM}				24	A

P-Channel

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}=0V, I_D=250uA	-30			V
Drain-Source Leakage Current	I_{DSS}	V_{DS} =-30 V, V_{GS} =0 V			-10	μA
Gate- Source Leakage Current	I_{GSS}	V_{GS} = ±16 V, V_{DS}=0 V			±10	μA
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{GS(TH)}$	V_{DS} =-10V, I_D =-1mA	-1.0		-2.5	V
Static Drain-Source On-State Resistance (Note)	$R_{DS(ON)}$	V_{GS} =-10 V, I_D =-3 A		43	60	mΩ
		V_{GS} =-4.5 V, I_D =-3 A		58	80	mΩ
		V_{GS} =-4.0 V, I_D =-3 A		65	110	mΩ
DYNAMIC PARAMETERS						
Input Capacitance	C_{ISS}	V_{DS} =-10 V, V_{GS} =0 V, f=1.0MHz		460		pF
Output Capacitance	C_{OSS}			130		pF
Reverse Transfer Capacitance	C_{RSS}			77		pF
SWITCHING PARAMETERS						
Turn-ON Delay Time	$t_{D(ON)}$	V_{DD}=-15V, V_{GS}=-10 V, I_D=-3 A , R_G=10 Ω,		8.5		ns
Turn-ON Rise Time	t_R			4.8		ns
Turn-OFF Delay Time	$t_{D(OFF)}$			42		ns
Turn-OFF Fall-Time	t_F			19		ns
Total Gate Charge	Q_G	V_{DD} =-24 V, V_{GS} =-10 V, I_D =-6 A		11		nC
Gate Source Charge	Q_{GS}			1.7		nC
Gate Drain Charge	Q_{GD}			3.3		nC

■ ELECTRICAL CHARACTERISTICS(Cont.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Drain-Source Diode Forward Voltage	V_{SD}	I_S = -6A, V_{GS} =0V (Note)		0.92		V
Diode Continuous Forward Current	I_S				-6	A
Diode Pulse Current	I_{SM}				-24	A

Note: Pulsed

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.