



US222

Preliminary

LINEAR INTEGRATED CIRCUIT

0.5A TO 2.0A HIGH-SIDE POWER DISTRIBUTION SWITCHES

DESCRIPTION

The UTC **US222** are low voltage cost-effective high-side power switches with flag function. These devices are particularly suitable for self-powered and bus-powered USB applications. The build-in N-MOSFET's $R_{DS(ON)}$ which meets the requirements of USB voltage drop is as low as 85 mΩ.

The UTC **US222** contains a charge pump circuitry to drive the internal MOSFET switch and also incorporate such protection circuits: soft-start circuit protect these devices from being damaged by limiting inrush current during plug-in; thermal shutdown circuit is used to prevent catastrophic switch failure from high-current loads. UVLO is used to ensure that the device remains off unless there is a valid input voltage present. A flag output is designed to indicate fault conditions to the local USB controller.


FEATURES

- * Low MOSFET On Resistance: 85mΩ
- * Compliant to USB Specifications
- * Available 4 Versions of Continuous Load: 0.5A/1.0A/1.5A/2.0A
- * Logic Level Enable Pin: Available with Active-high or Active-low Version
- * Low Supply Current: 68μA (Typ.)
- * Low Shutdown Current: 1.0μA (Max)
- * Soft Start-up
- * Under-voltage Lockout
- * Over-current Protection
- * Over Temperature Protection
- * Load Short Protection with Fold-back
- * Deglitched FLAG Output with Open Drain
- * No Reverse Current When Power Off
- * With Output Shutdown Pull-low Resistor


ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
US222XXL-AF5-R	US222XXG-AF5-R	SOT-25	Tape Reel


<p>US222XXG-AF5-R</p> <ul style="list-style-type: none"> (1)Packing Type (2)Package Type (3)Green Package (4)Active (5)Current Limit 	<ul style="list-style-type: none"> (1) R: Tape Reel (2) AF5: SOT-25 (3) G: Halogen Free and Lead Free, L: Lead Free (4) L: Low, H: High (5) A: 2.0A, B: 1.5A, C: 1.0A, D: 0.5A
---	---

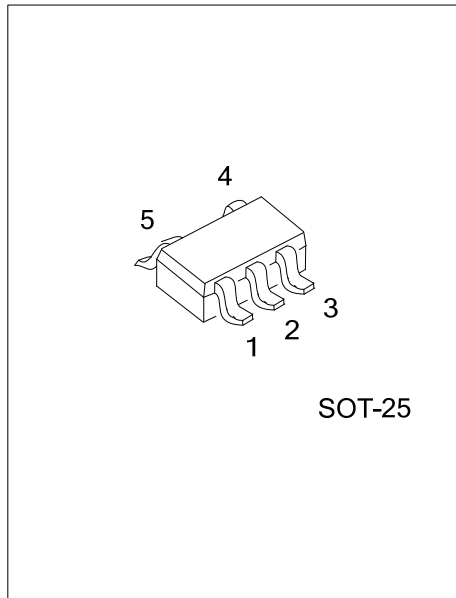

MARKING




PIN CONFIGURATION



PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	V _{OUT}	Switch output voltage
2	GND	Ground
3	FLAG	Fault flag pin, output with open drain, need a pull-up resistor in application, active low to indicate OCP or OTP
4	EN	Chip enable control input, active low or high
5	V _{IN}	Supply input pin

BLOCK DIAGRAM

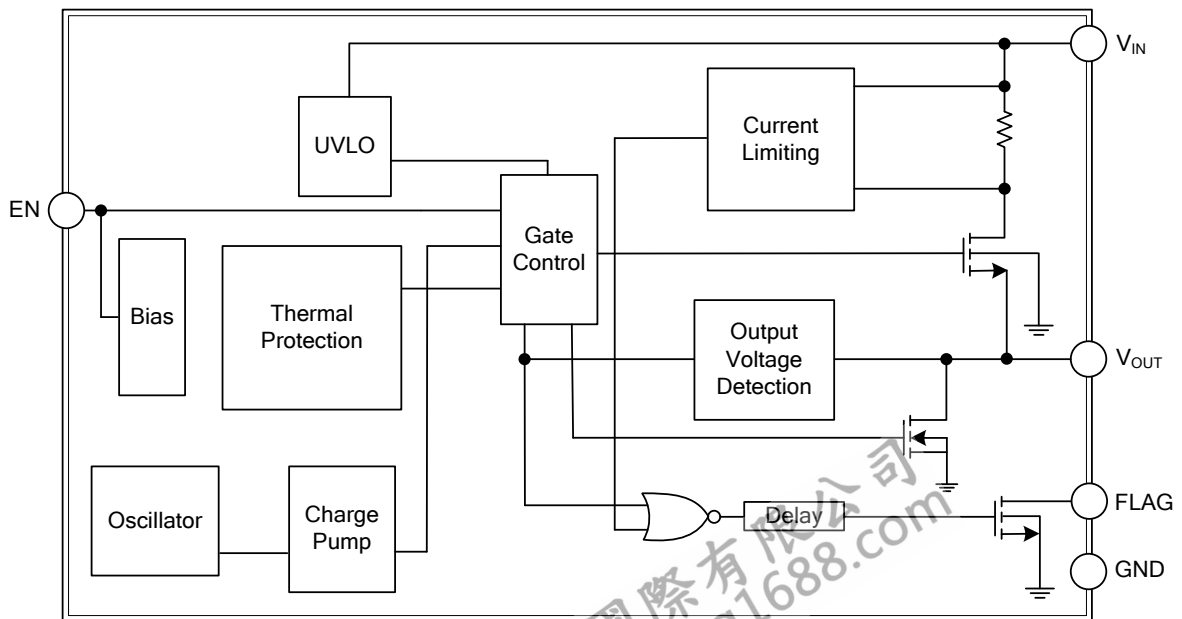

■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Power Supply Voltage	V_{IN}	6.0	V
Operating Junction Temperature Range	T_J	150	°C
Storage Temperature Range	T_{STG}	-65~+150	°C
Lead Temperature (Soldering, 10sec)	T_{LEAD}	260	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Supply Voltage	V_{IN}			5.5	V
Operating Ambient Temperature Range	T_A	-40		85	°C

■ THERMAL DATA


PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	300	°C/W

■ ELECTRICAL CHARACTERISTICS

($V_{IN}=5.0V$, $C_{IN}=2.2\mu F$, $C_{OUT}=1.0\mu F$, Typical $T_A=25^\circ C$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{IN}				5.5	V
Switch On Resistance	$R_{DS(ON)}$	$V_{IN}=5.0V$, $I_{OUT}=0.5A$		85	110	m Ω
Supply Current	I_{SUPPLY}	$V_{IN}=5.0V$, No Load		68	95	μA
Current Limit	I_{LIMIT}	US222AL/AH (2.0A), $V_{OUT}=4.0V$	2.1	2.7	3.6	A
		US222BL/BH (1.5A), $V_{OUT}=4.0V$	1.6	2.0	2.8	A
		US222CL/CH (1.0A), $V_{OUT}=4.0V$	1.1	1.5	2.1	A
		US222DL/DH (0.5A), $V_{OUT}=4.0V$	0.6	1.0	1.4	A
Fold-back Short Current	I_{SHORT}	US222A/B/C/D, $V_{OUT}=0V$		1.0		A
Shutdown Supply Current	$I_{SHUTDOWN}$	Chip Disable, Shutdown Mode		0.1	5.0	μA
Enable High Input Threshold	V_{ENH}		2.0			V
Enable Low Input Threshold	V_{ENL}				0.8	V
Enable Pin Input Current	I_{EN}	Force 0V to 5.0V at EN Pin	-1.0		1.0	μA
Under Voltage Lockout Threshold Voltage	V_{UVLO}	V_{IN} Increasing from 0V		2.5		V
Under Voltage Hysteresis	V_{UVLOHY}			0.2		V
Output Pull Low Resistance after Shutdown	$R_{DISCHARGE}$			100		Ω
Output Turn-on Time	t_{ON}	From Enable Active to 90% of Output		400		μs
FLAG Pin Delay Time	t_{DFLG}	From Over Current Fault Condition to Flag Active		12		ms
FLAG Pin Low Voltage	V_{FLG}	$I_{SINK}=1.0mA$		35		mV
FLAG Pin Leakage Current	$I_{LEAKAGE}$	FLAG Disable, Force 5.0V			1.0	μA
Thermal Shutdown Temperature	T_{OTS}			150		°C
Thermal Shutdown Hysteresis	T_{HYOTS}			30		°C

■ TYPICAL APPLICATION CIRCUIT

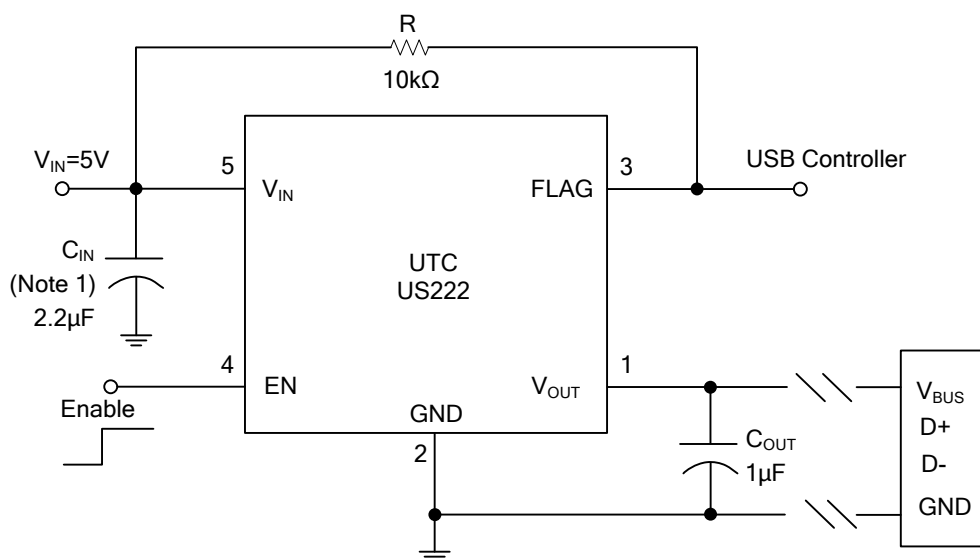

Note: 2.2µF input capacitor is enough in most application cases.

If the V_{OUT} is short to ground frequently during usage, large size input capacitor is necessary, recommend 22µF.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.