



**UTG25N120**

Preliminary

*Insulated Gate Bipolar Transistor*

**1200V NPT TRENCH IGBT**

■ DESCRIPTION



The UTC **UTG25N120** is an NPT ignition Insulated Gate Bipolar Transistor. it uses UTC's advanced technology to provide customers with high switching speed, high avalanche ruggedness, low saturation voltage and low switching loss, etc.

The UTC **UTG25N120** is suitable for the resonant or soft switching applications.

■ FEATURES

- \* High switching speed
- \* High avalanche ruggedness
- \* Low saturation voltage:  $V_{CE(sat), typ} = 2.0V @ I_C=25A$  and  $T_C=25^\circ C$
- \* Low switching loss:  $E_{off, typ} = 0.96mJ @ I_C=25A$  and  $T_C=25^\circ C$

■ SYMBOL

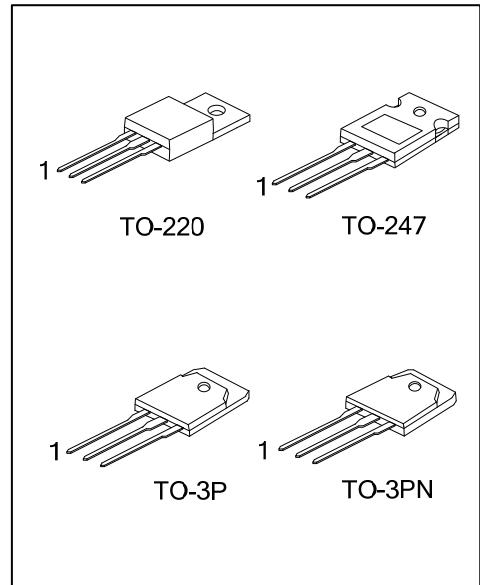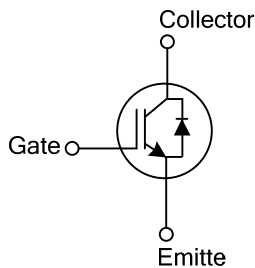


■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UTG25N120L-TA3-T	UTG25N120G-TA3-T	TO-220	G	C	E	Tube
UTG25N120L-T3P-T	UTG25N120G-T3P-T	TO-3P	G	C	E	Tube
UTG25N120L-T3N-T	UTG25N120G-T3N-T	TO-3PN	G	C	E	Tube
UTG25N120L-T47-T	UTG25N120G-T47-T	TO-247	G	C	E	Tube

Note: Pin Assignment: G: Gate C: Collector E: Emitte

<p>UTG25N120G-TA3-T</p> <p>(1)Packing Type (2)Package Type (3)Green Package</p>	<p>(1) T: Tube (2) TA3: TO-220, T3P: TO-3P, T3N: TO-3PN, T47: TO-247 (3) G: Halogen Free and Lead Free, L: Lead Free</p>
---	--

■ MARKING

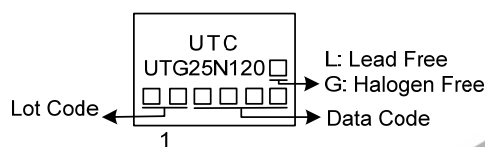

### ■ ABSOLUTE MAXIMUM RATINGS

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Emitter Voltage		$V_{CES}$	1200	V
Gate-Emitter Voltage		$V_{GES}$	$\pm 20$	V
Continuous Collector Current	$T_C=25^\circ\text{C}$	$I_C$	50	A
	$T_C=100^\circ\text{C}$		25	A
Collector Current Pulsed (Note 1)		$I_{CM}$	75	A
Diode Continuous Forward Current ( $T_C=100^\circ\text{C}$ )		$I_F$	25	A
Diode Maximum Forward Current		$I_{FM}$	150	A
Power Dissipation	$T_C=25^\circ\text{C}$	TO-220	89	W
		TO-247	200	W
		TO-3P/TO-3PN	312	W
Operating Junction Temperature		$T_J$	-55~+150	$^\circ\text{C}$
Storage Temperature Range		$T_{STG}$	-55~+150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

Absolute maximum ratings are those values beyond which the device could be permanently damaged.

2. Pulse width limited by maximum junction temperature.

### ■ THERMAL CHARACTERISTICS

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-220	$\theta_{JA}$	62.5	$^\circ\text{C/W}$
	TO-247		40	$^\circ\text{C/W}$
	TO-3P/TO-3PN		35	$^\circ\text{C/W}$
Junction to Case	TO-220	$\theta_{JC}$	1.4	$^\circ\text{C/W}$
	TO-247		0.62	$^\circ\text{C/W}$
	TO-3P/TO-3PN		0.4	$^\circ\text{C/W}$

■ ELECTRICAL CHARACTERISTICS (T<sub>C</sub>=25°C, unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT		
<b>Off Characteristics</b>								
Collector Cut-Off Current	I <sub>CES</sub>	V <sub>CE</sub> =V <sub>CES</sub> , V <sub>GE</sub> =0V			3	mA		
G-E Leakage Current	I <sub>GES</sub>	V <sub>GE</sub> =V <sub>GES</sub> , V <sub>CE</sub> =0V			±250	mA		
<b>On Characteristics</b>								
Gate to Emitter Threshold Voltage	V <sub>GE(TH)</sub>	I <sub>C</sub> =25mA, V <sub>CE</sub> =V <sub>GE</sub>	3.5	5.5	7.5	V		
Collector to Emitter Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>C</sub> =25A, V <sub>GE</sub> =15V		2.0	2.5	V		
		I <sub>C</sub> =25A, V <sub>GE</sub> =15V, T <sub>C</sub> =125°C		2.15		V		
		I <sub>C</sub> =50A, V <sub>GE</sub> =15V		2.65		V		
<b>Dynamic Characteristics</b>								
Input Capacitance	C <sub>IES</sub>	V <sub>CE</sub> =30V, V <sub>GE</sub> =0V, f=1MHz		3700		pF		
Output Capacitance	C <sub>OES</sub>			130		pF		
Reverse Transfer Capacitance	C <sub>RES</sub>			80		pF		
<b>Switching Characteristics</b>								
Turn-On Delay Time	t <sub>DON</sub>	V <sub>CC</sub> =600V, I <sub>C</sub> =25A, R <sub>G</sub> =10Ω, V <sub>GE</sub> =15V, Inductive Load, T <sub>C</sub> =25°C		50		ns		
Rise Time	t <sub>R</sub>			40		ns		
Turn-Off Delay Time	t <sub>DOFF</sub>			190		ns		
Fall Time	t <sub>F</sub>			180		ns		
Turn-On Switching Loss	E <sub>ON</sub>			4.1	6.2	mJ		
Turn-Off Switching Loss	E <sub>OFF</sub>			0.96	1.5	mJ		
Total Switching Loss	E <sub>TS</sub>			5.06	7.7	mJ		
Turn-On Delay Time	t <sub>DON</sub>		V <sub>CC</sub> =600V, I <sub>C</sub> =25A, R <sub>G</sub> =10Ω, V <sub>GE</sub> =15V, Inductive Load, T <sub>C</sub> =125°C		50		ns	
Rise Time	t <sub>R</sub>				60		ns	
Turn-Off Delay Time	t <sub>DOFF</sub>				200		ns	
Fall Time	t <sub>F</sub>				154		ns	
Turn-On Switching Loss	E <sub>ON</sub>				4.3	6.9	mJ	
Turn-Off Switching Loss	E <sub>OFF</sub>				1.5	2.4	mJ	
Total Switching Loss	E <sub>TS</sub>				5.8	9.3	mJ	
Total Gate Charge	Q <sub>G</sub>	V <sub>CE</sub> =600V, I <sub>C</sub> =25A, V <sub>GE</sub> =15V			200	300	nC	
Gate-Emitter Charge	Q <sub>GE</sub>				15	23	nC	
Gate-Collector Charge	Q <sub>GC</sub>				100	150	nC	
<b>SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS</b>								
Forward Voltage Drop	V <sub>FM</sub>	I <sub>F</sub> =25A		T <sub>C</sub> =25°C		2.0	3.0	V
				T <sub>C</sub> =125°C		2.1		V
Reverse Recovery Time	t <sub>rr</sub>	I <sub>F</sub> =25A,		T <sub>C</sub> =25°C		235	350	ns
			T <sub>C</sub> =125°C		300		ns	
Peak Reverse Recovery Current	I <sub>rr</sub>	dI/dt=200A/μS	T <sub>C</sub> =25°C		27	40	A	
			T <sub>C</sub> =125°C		31		A	
Reverse Recovery Charge	Q <sub>rr</sub>		T <sub>C</sub> =25°C		3130	4700	nC	
			T <sub>C</sub> =125°C		4650		nC	

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.