



## UTT220N03

Power MOSFET

### 220A, 30V N-CHANNEL ENHANCEMENT MODE POWER MOSFET

#### DESCRIPTION


The UTC **UTT220N03** is a N-channel MOSFET, using UTC's advanced technology to provide customers with a minimum on-state resistance and superior switching performance.

The UTC **UTT220N03** is generally applied in DC to DC convertor or synchronous rectification

#### FEATURES

- \*  $R_{DS(ON)} < 2.4m\Omega @ V_{GS}=10V, I_D=80A$
- \* Low Gate Charge (Typical 84nC)
- \* Fast Switching
- \* 100% Avalanche Tested
- \* High Power and Current Handling Capability
- \* RoHS Compliant

#### SYMBOL

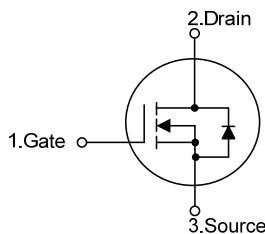


#### ORDERING INFORMATION


Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UTT220N03L-TA3-T	UTT220N03G-TA3-T	TO-220	G	D	S	Tube
UTT220N03L-TQ2-T	UTT220N03G-TQ2-T	TO-263	G	D	S	Tube
UTT220N03L-TQ2-R	UTT220N03G-TQ2-R	TO-263	G	D	S	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

UTT220N03G-TA3-T	(1)Packing Type	(1) T: Tube, R: Tape Reel
	(2)Package Type	(2) TA3: TO-220, TQ2: TO-263
	(3)Green Package	(3) G: Halogen Free and Lead Free, L: Lead Free

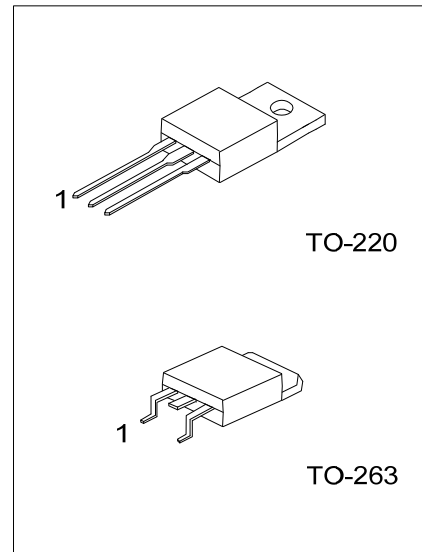

■ MARKING

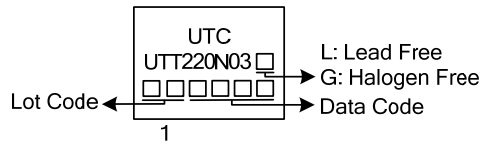

FLYING 汎翔國際有限公司  
www.flying1688.com

■ ABSOLUTE MAXIMUM RATINGS (Note 6) ( $T_C=25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Drain-Source Voltage	$V_{DS}$	30	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Drain Current	Continuous ( $T_C=25^\circ\text{C}$ )	$I_D$	220
	$T_C=100^\circ\text{C}$		170
	Pulsed (Note 1)	$I_{DM}$	876
Single Pulsed Avalanche Energy (Note 2)	$E_{AS}$	864	mJ
Peak Diode Recovery $dv/dt$ (Note 3)	$dv/dt$	6.0	V/ns
Power Dissipation	$T_C=25^\circ\text{C}$	$P_D$	214
	$T_C=100^\circ\text{C}$		100
	Derate above $25^\circ\text{C}$		1.43
Junction Temperature	$T_J$	$-55 \sim +175$	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	$-55 \sim +175$	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.  
 Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	$\theta_{JA}$	62.5	$^\circ\text{C/W}$
Junction to Case	$\theta_{JC}$	0.7	$^\circ\text{C/W}$

■ ELECTRICAL CHARACTERISTICS (T<sub>C</sub>=25°C, unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>OFF CHARACTERISTICS</b>						
Drain-Source Breakdown Voltage	BV <sub>DSS</sub>	I <sub>D</sub> =250μA, V <sub>GS</sub> =0V, T <sub>C</sub> =25°C	30			V
Breakdown Voltage Temperature Coefficient	ΔBV <sub>DSS</sub> /ΔT <sub>J</sub>	Reference to 25°C, I <sub>D</sub> =250μA		30		mV/°C
Drain-Source Leakage Current	I <sub>DSS</sub>	V <sub>DS</sub> =32V, V <sub>GS</sub> =0V			10	μA
Gate- Source Leakage Current	Forward	V <sub>GS</sub> =+20V, V <sub>DS</sub> =0V			+100	nA
	Reverse	V <sub>GS</sub> =-20V, V <sub>DS</sub> =0V			-100	nA
<b>ON CHARACTERISTICS</b>						
Gate Threshold Voltage	V <sub>GS(TH)</sub>	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250μA	1.0		3.0	V
Static Drain-Source On-State Resistance	R <sub>DS(ON)</sub>	V <sub>GS</sub> =10V, I <sub>D</sub> =80A		2.0	2.4	mΩ
<b>DYNAMIC PARAMETERS</b>						
Input Capacitance	C <sub>ISS</sub>	V <sub>GS</sub> =0V, V <sub>DS</sub> =25V, f=1.0MHz		5490	7300	pF
Output Capacitance	C <sub>OSS</sub>			1220	1620	pF
Reverse Transfer Capacitance	C <sub>RSS</sub>			155	233	pF
<b>SWITCHING PARAMETERS</b>						
Total Gate Charge	Q <sub>G</sub>	V <sub>GS</sub> =10V, V <sub>DS</sub> =30V, I <sub>D</sub> =1.3A (Note 4, 5)		200	220	nC
Gate to Source Charge	Q <sub>GS</sub>			19		nC
	Q <sub>GS2</sub>			9.5		nC
Gate to Drain Charge	Q <sub>GD</sub>			12		nC
Turn-ON Delay Time	t <sub>D(ON)</sub>	V <sub>DD</sub> =30V, I <sub>D</sub> =0.5A, R <sub>GEN</sub> =4.7Ω, V <sub>GS</sub> =10V (Note 4, 5)		58	70	ns
Rise Time	t <sub>R</sub>			260	310	ns
Turn-OFF Delay Time	t <sub>D(OFF)</sub>			1810	1860	ns
Fall-Time	t <sub>F</sub>			987	1160	ns
Equivalent Series Resistance (G-S)	ESR			1.1		Ω
<b>SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS</b>						
Maximum Body-Diode Continuous Current	I <sub>S</sub>				219	A
Maximum Body-Diode Pulsed Current	I <sub>SM</sub>				876	A
Drain-Source Diode Forward Voltage	V <sub>SD</sub>	I <sub>S</sub> =80A, V <sub>GS</sub> =0V			1.3	V
Body Diode Reverse Recovery Time	t <sub>rr</sub>	I <sub>S</sub> =80A, V <sub>GS</sub> =0V,		54		ns
Body Diode Reverse Recovery Charge	Q <sub>rr</sub>	di <sub>F</sub> /dt=100A/μs (Note 4)		49		nC

Notes: 1. Repetitive Rating: Pulse width limited by maximum junction temperature

2. L = 3mH, I<sub>AS</sub> = 24A, V<sub>DD</sub> = 30V, R<sub>G</sub> = 25Ω, Starting T<sub>J</sub> = 25°C





3. I<sub>SD</sub> ≤ 80A, di/dt ≤ 200A/μs, V<sub>DD</sub> ≤ BV<sub>DSS</sub>, Starting T<sub>J</sub> = 25°C

4. Pulse Test: Pulse width ≤ 300μs, Duty cycle ≤ 2%

5. Essentially independent of operating temperature.


## TEST CIRCUITS AND WAVEFORMS

Peak Diode Recovery dv/dt Test Circuit & Waveforms

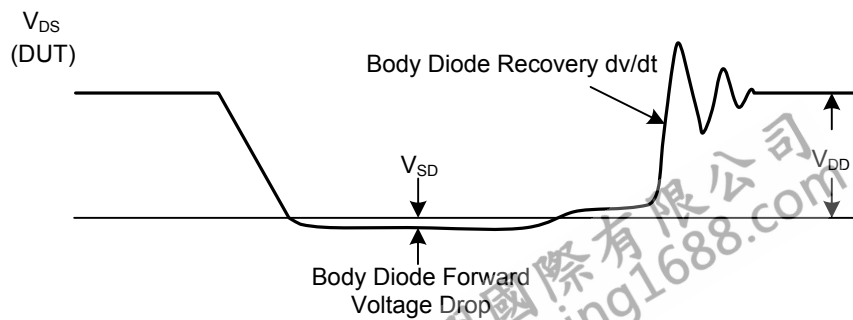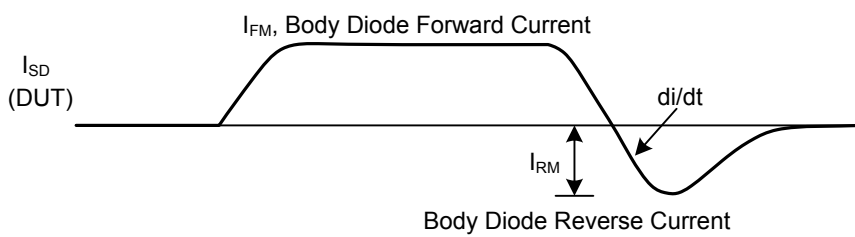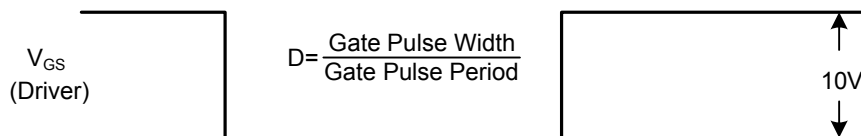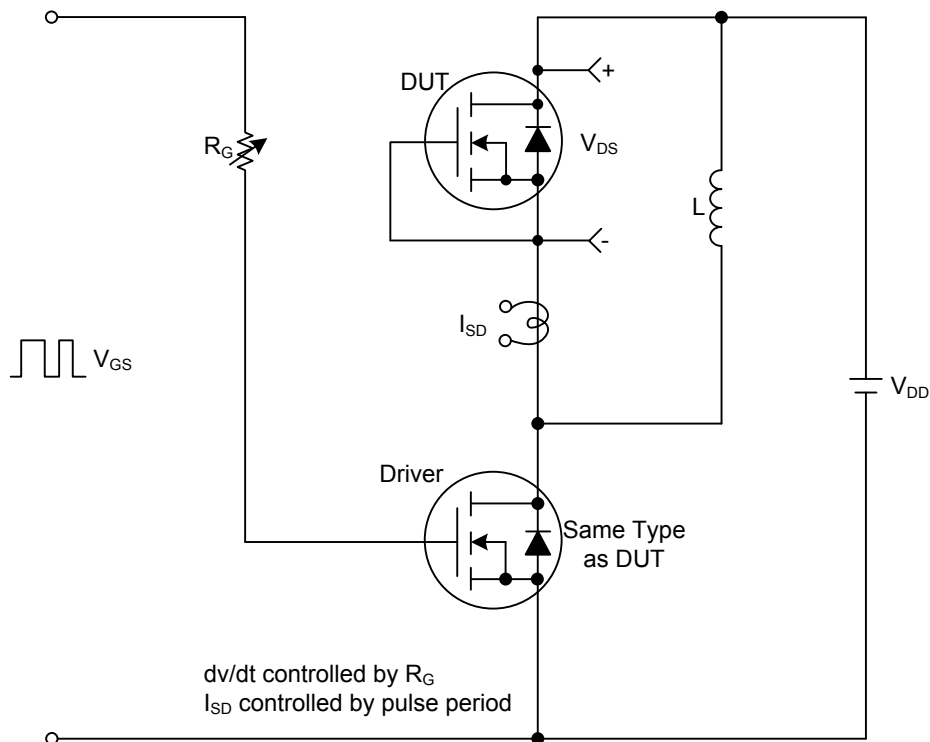


## TEST CIRCUITS AND WAVEFORMS(Cont.)


Gate Charge Test Circuit

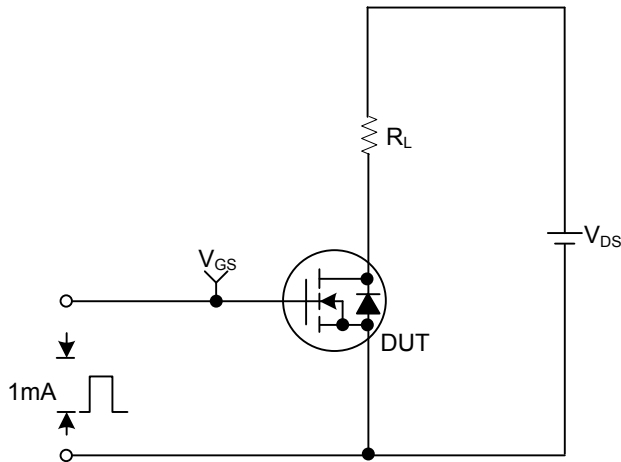


Gate Charge Waveforms

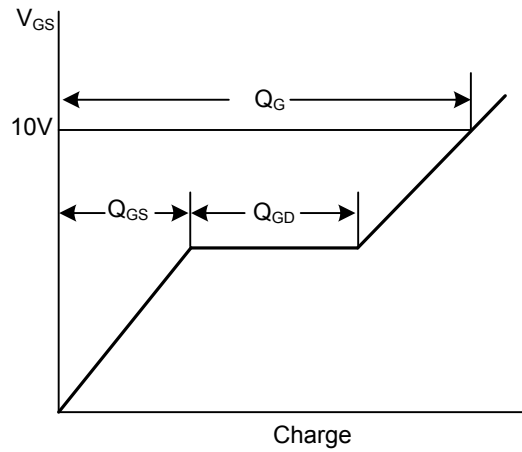


Resistive Switching Test Circuit

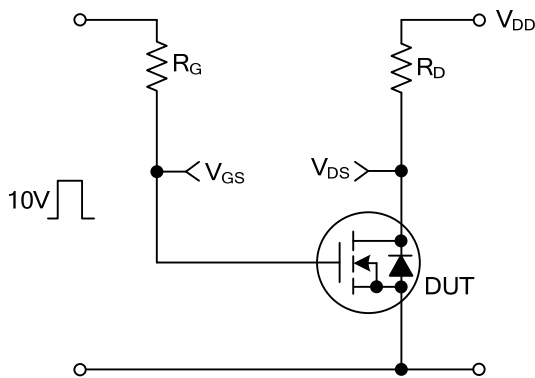


Resistive Switching Waveforms

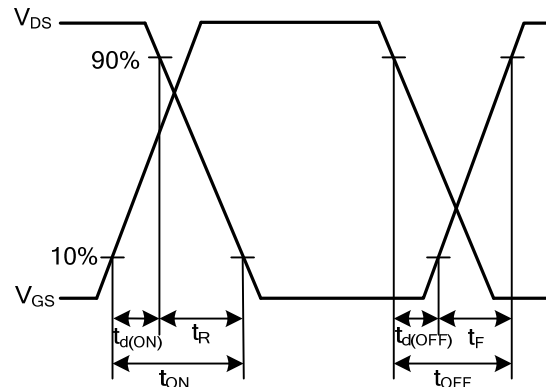





Unclamped Inductive Switching Test Circuit

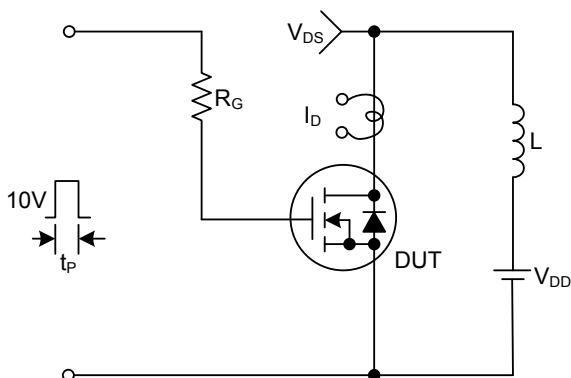

Unclamped Inductive Switching Waveforms

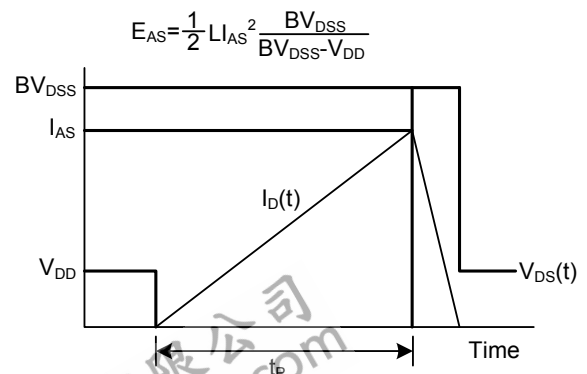

### TYPICAL CHARACTERISTICS

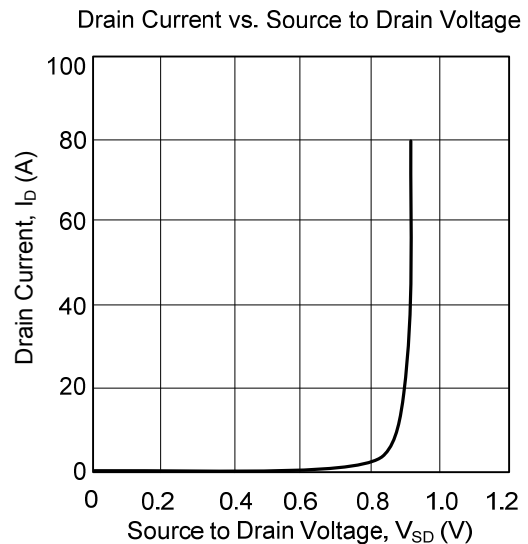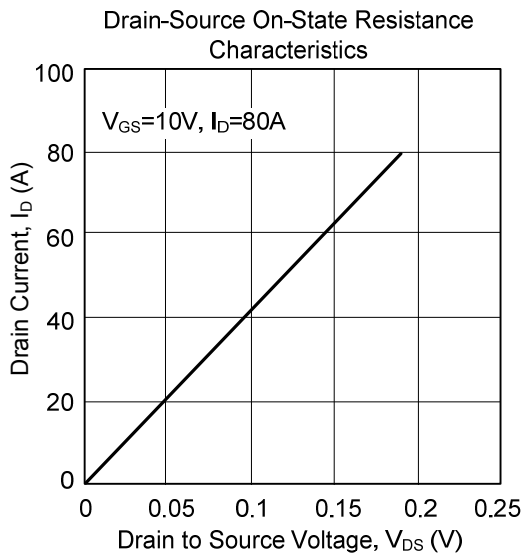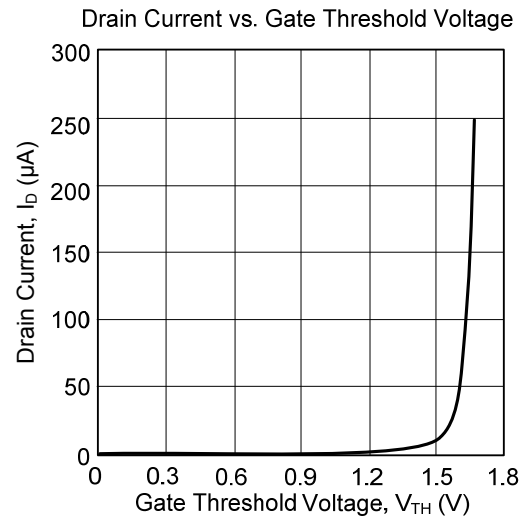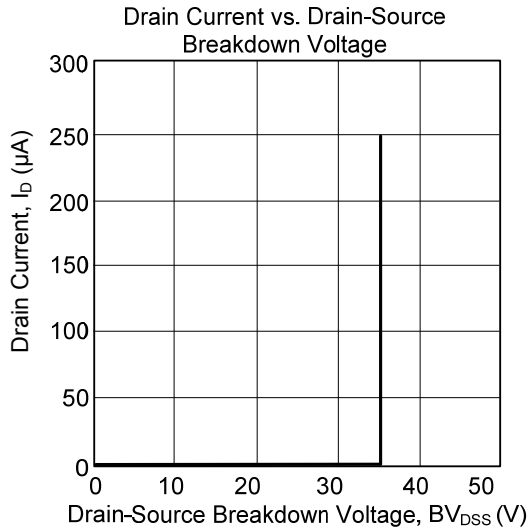

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.