



## U74LVC157

CMOS IC

### QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS

#### DESCRIPTION

The **U74LVC157** is designed for 1.65V to 3.6V  $V_{CC}$  operation.

The device features a common strobe ( $\overline{G}$ ) input. When ( $\overline{G}$ ) is high, all outputs are low. When  $\overline{G}$  is low, a 4-bit word is selected from one of two sources and is routed to the four outputs.

#### FEATURES



- \* Operate From 1.65V to 3.6V
- \* Inputs Accept Voltages to 5.5V
- \* Max  $t_{pd}$  of 5.0ns at 3.3V
- \* Typical  $V_{OLP}$  (Output Ground Bounce) < 0.8V at  $V_{CC}$ =3.3V,  $T_A$ =25°C
- \* Typical  $V_{OHV}$  (Output  $V_{OH}$  Undershoot) > 2V at  $V_{CC}$ =3.3V,  $T_A$ =25°C

#### ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74LVC157L-S16-R	U74LVC157G-S16-R	SOP-16	Tape Reel
U74LVC157L-P16-R	U74LVC157G-P16-R	TSSOP-16	Tape Reel

U74LVC157G-S16-R	(1) Packing Type (2) Package Type (3) Green Package	(1) R: Tape Reel (2) S16: SOP-16, P16: TSSOP-16 (3) G: Halogen Free and Lead Free, L: Lead Free
------------------	---	---

#### MARKING

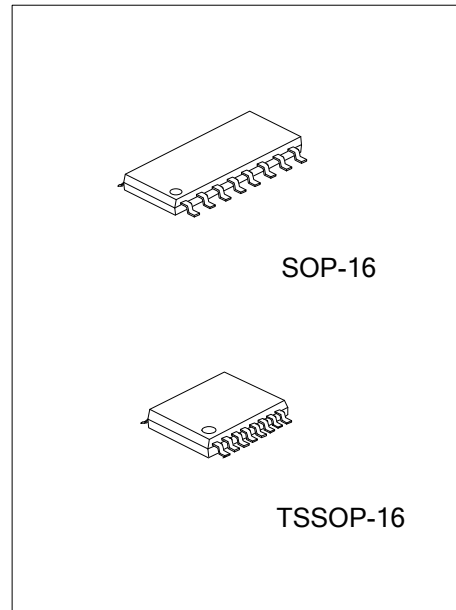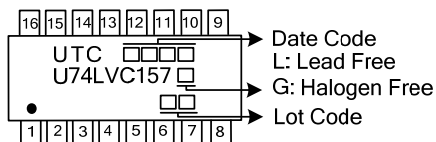

PIN CONFIGURATION

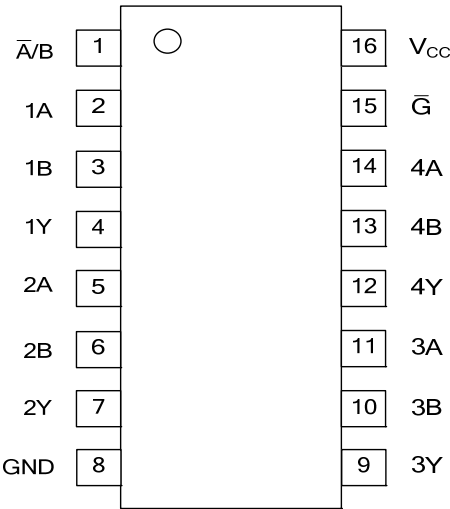


FUNCTION TABLE

INPUTS				OUTPUT Y
G	A / B	A	B	
H	X	X	X	L
L	L	L	X	L
L	L	H	X	H
L	H	X	L	L
L	H	X	H	H

Note: H: HIGH voltage level; L: LOW voltage level; X: Don't care.

## ■ LOGIC DIAGRAM (positive logic)

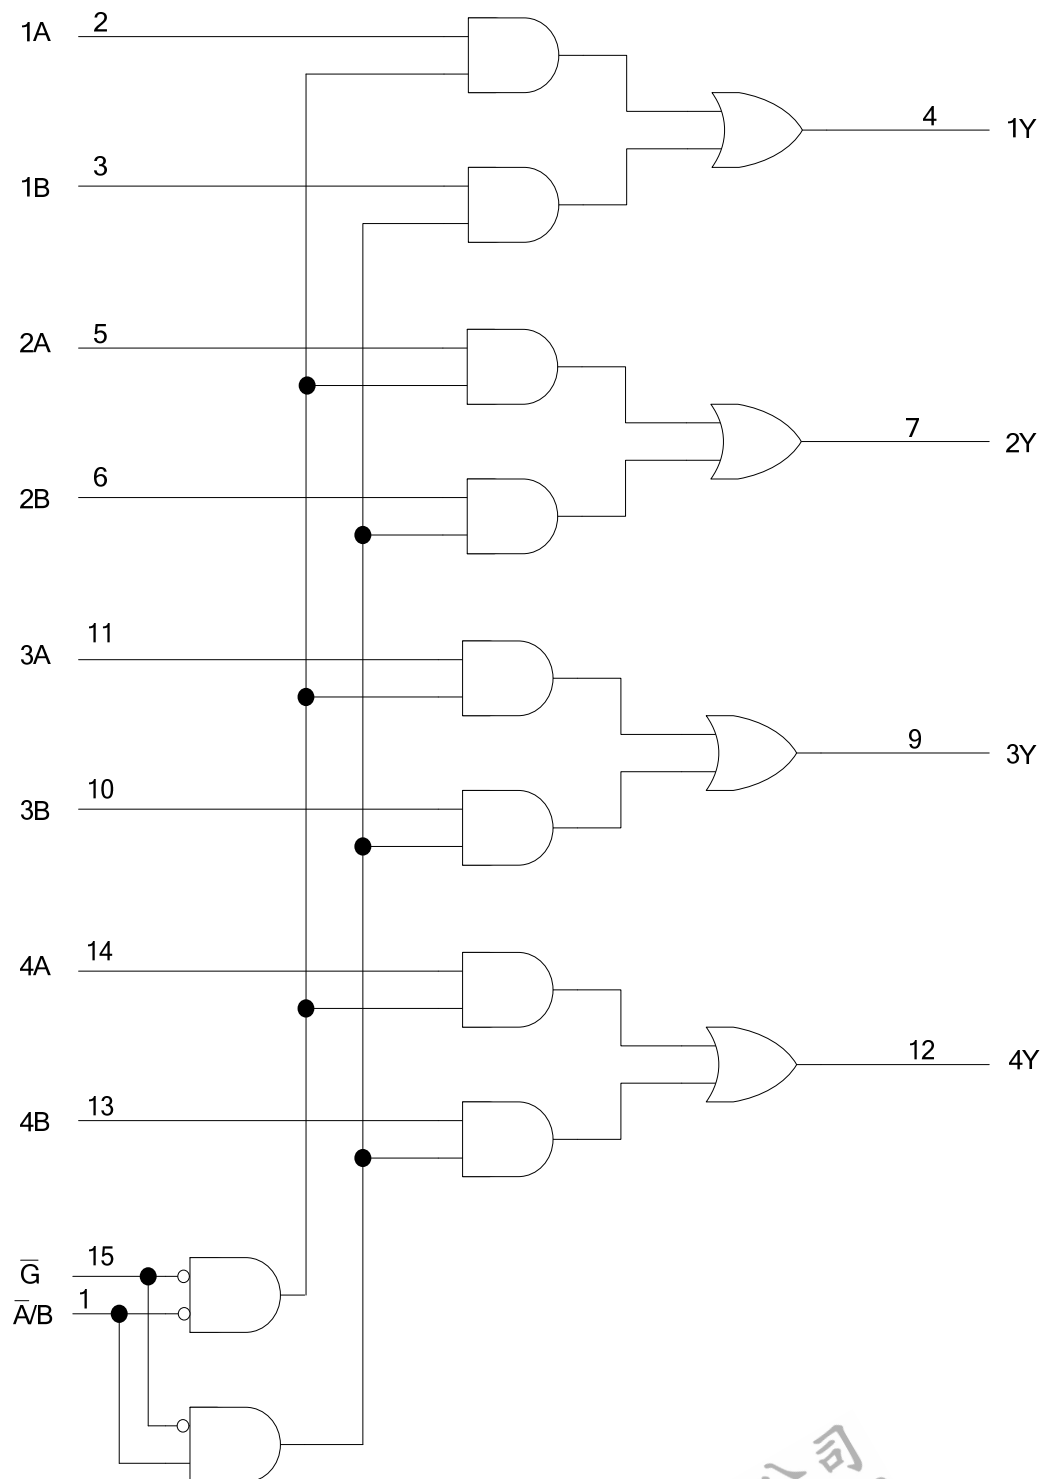

## ■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	CONDITIONS	RATINGS	UNIT
Supply Voltage	$V_{CC}$		-0.5 ~ +6.5	V
Input Voltage	$V_{IN}$		-0.5 ~ +6.5	V
Output Voltage	$V_{OUT}$	Output in the high or low state	-0.5 ~ $V_{CC} + 0.5$	V
		Output in the power-off state	-0.5 ~ +6.5	V
Continuous $V_{CC}$ or GND Current	$I_{CC}$		±100	mA
Continuous Output Current	$I_{OUT}$	$V_{OUT}=0V \sim V_{CC}$	±50	mA
Input Clamp Current	$I_{IK}$	$V_{IN}<0V$	-50	mA
Output Clamp Current	$I_{OK}$	$V_{OUT}>V_{CC}$ or $V_{OUT}<0V$	-50	mA
Storage Temperature Range	$T_{STG}$		-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS ( $T_A = 25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	$V_{CC}$	Operating	1.65		3.6	V
Input Voltage	$V_{IN}$		0		5.5	V
Output Voltage	$V_{OUT}$		0		$V_{CC}$	V
High-level input voltage	$V_{IH}$	$V_{CC}=1.65V \sim 1.95V$	$0.65 \times V_{CC}$			V
		$V_{CC}=2.3V \sim 2.7V$	1.7			
		$V_{CC}=2.7V \sim 3.6V$	2			
Low-level input voltage	$V_{IL}$	$V_{CC}=1.65V \sim 1.95V$			$0.35 \times V_{CC}$	V
		$V_{CC}=2.3V \sim 2.7V$			0.7	
		$V_{CC}=2.7V \sim 3.6V$			0.8	
Input Transition Rise or Fall Rate	$\Delta t/\Delta v$				10	ns/V
Operating Temperature	$T_A$		-40		85	°C

Note: All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation.

■ ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-Level Output Voltage	$V_{OH}$	$V_{CC}=1.65 \sim 3.6V$ , $I_{OH}=-100\mu A$	$V_{CC}-0.2$			V
		$V_{CC}=1.65V$ , $I_{OH}=-4mA$	1.29			
		$V_{CC}=2.3V$ , $I_{OH}=-8mA$	1.9			
		$V_{CC}=2.7V$ , $I_{OH}=-12mA$	2.2			
		$V_{CC}=3.0V$ , $I_{OH}=-12mA$	2.4			
		$V_{CC}=3V$ , $I_{OH}=-24mA$	2.3			
Low-Level Output Voltage	$V_{OL}$	$V_{CC}=1.6 \sim 3.6V$ , $I_{OL}=100\mu A$			0.1	V
		$V_{CC}=1.65V$ , $I_{OL}=4mA$			0.24	
		$V_{CC}=2.3V$ , $I_{OL}=8mA$			0.30	
		$V_{CC}=2.7V$ , $I_{OL}=12mA$			0.40	
		$V_{CC}=3V$ , $I_{OL}=24mA$			0.55	

## ■ ELECTRICAL CHARACTERISTICS (Cont.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Leakage Current	$I_{I(LEAK)}$	$V_{CC}=3.6V$ , $V_{IN}=5.5V$ or GND			$\pm 1$	$\mu A$
Power OFF Leakage Current	$I_{OFF}$	$V_{CC}=0V$ , $V_{IN}$ or $V_{OUT}=5.5V$			$\pm 10$	$\mu A$
Quiescent Supply Current	$I_{CC}$	$V_{IN}=V_{CC}$ or GND, $I_{OUT}=0$ $V_{CC}=3.6V$			1	$\mu A$
Additional Quiescent Supply Current Per Input Pin	$\Delta I_{CC}$	$V_{CC}=2.7V \sim 3.6V$ , One input at $V_{CC}-0.6V$ , Other inputs at $V_{CC}$ or GND			500	$\mu A$
Input Capacitance	$C_I$	$V_{CC}=3.3V$ , $V_{IN}=V_{CC}$ or GND		5		pF


■ SWITCHING CHARACTERISTICS ( $T_A = 25^\circ C$ , unless otherwise specified)(see Figure 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation delay from input (A or B) to output(Y)	$t_{PLH}/t_{PHL}$	$V_{CC}=1.8V \pm 0.15V$ , $C_L=30pF$	1	5.5	13.5	ns
		$V_{CC}=2.5V \pm 0.2V$ , $C_L=30pF$	1	3.2	7.4	ns
		$V_{CC}=2.7V$ , $C_L=50pF$	1	3.6	5.7	ns
		$V_{CC}=3.3V \pm 0.3V$ , $C_L=50pF$	1	3	5	ns
Propagation delay from input ( $\bar{A}$ / $\bar{B}$ ) to output(Y)	$t_{PLH}/t_{PHL}$	$V_{CC}=1.8V \pm 0.15V$ , $C_L=30pF$	1	6	15.5	ns
		$V_{CC}=2.5V \pm 0.2V$ , $C_L=30pF$	1	3.7	9.6	ns
		$V_{CC}=2.7V$ , $C_L=50pF$	1	4.1	7.9	ns
		$V_{CC}=3.3V \pm 0.3V$ , $C_L=50pF$	1	3.4	6.6	ns
Propagation delay from input ( $\bar{G}$ ) to output(Y)	$t_{PLH}/t_{PHL}$	$V_{CC}=1.8V \pm 0.15V$ , $C_L=30pF$	1	5.9	13.5	ns
		$V_{CC}=2.5V \pm 0.2V$ , $C_L=30pF$	1	3.5	9.3	ns
		$V_{CC}=2.7V$ , $C_L=50pF$	1	3.9	7.6	ns
		$V_{CC}=3.3V \pm 0.3V$ , $C_L=50pF$	1	3.3	6.3	ns

■ OPERATING CHARACTERISTICS ( $f=10MHz$ ,  $T_A = 25^\circ C$ , unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	$C_{PD}$	$V_{CC}=1.8V$		14		pF
		$V_{CC}=2.5V$		15		pF
		$V_{CC}=3.3V$		16		pF

## ■ TEST CIRCUIT AND WAVEFORMS

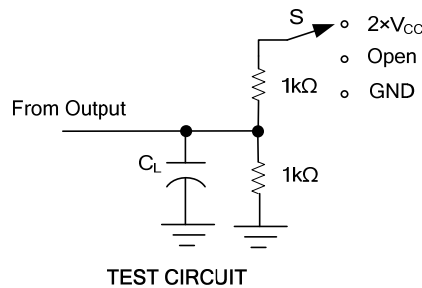

TEST	S
$t_{PLH}/t_{PHL}$	Open
$t_{PHZ}/t_{PZH}$	GND
$t_{PLZ}/t_{PZL}$	$2 \times V_{CC}$

$V_{CC}$	INPUTS		$V_M$	$V_{LOAD}$	$C_L$	$R_L$	$V_{\Delta}$
	$V_{IN}$	$t_R/t_F$					
$1.8V \pm 0.15V$	$V_{CC}$	$\leq 2ns$	$V_{CC}/2$	$2 \times V_{CC}$	30pF	1KΩ	0.15V
$2.5V \pm 0.2V$	$V_{CC}$	$\leq 2ns$	$V_{CC}/2$	$2 \times V_{CC}$	30pF	500Ω	0.15V
2.7V	2.7V	$\leq 2.5ns$	1.5V	6V	50pF	500Ω	0.3V
$3.3V \pm 0.3V$	2.7V	$\leq 2.5ns$	1.5V	6V	50pF	500Ω	0.3V

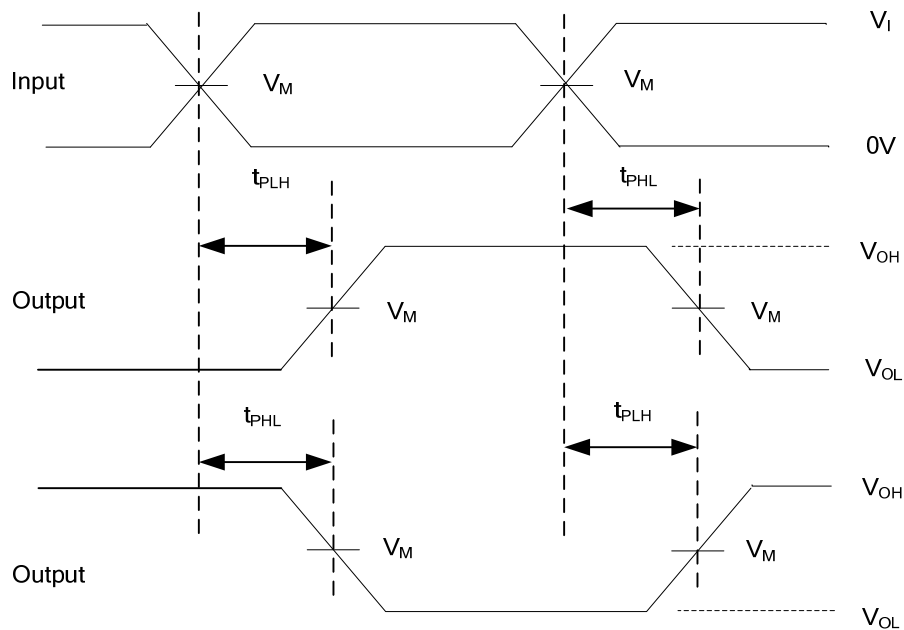

Note: 1.  $C_L$  includes probe and jig capacitance.

2. All input pulses are supplied by generators having the following characteristics: PRR  $\leq 10MHz$ ,  $Z_o = 50\Omega$ .

**Figure 1. Test Circuit and Voltage Waveforms**

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.