
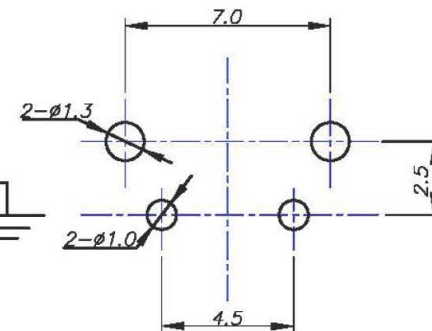


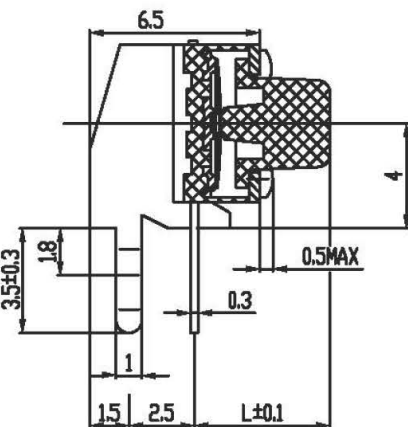


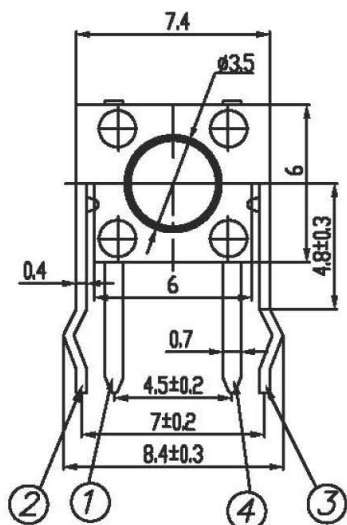


CIRCUIT

P.C.B Layout

FLY -1102V(L)-(OF)-(B)-K

TYPE	1	2	3
Operating Force	100±30gf	160±30gf	250±50gf
Return force	20gf	40gf	60gf

STEM Color:	
B:	Black
R:	Red

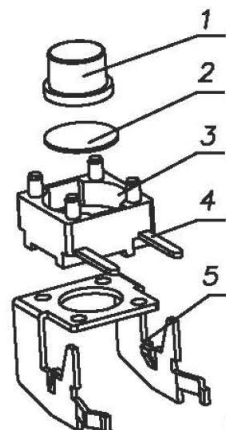

- 1.Rating: DC12V 50mA
- 2.Contact Resistance : 50mΩ max(initial)
- 3.Insulation Resistance: 100MΩ min
- 4.Electrically Life:100gf 100,000 cycles
160gf 80,000 cycles
250gf 60,000 cycles
- 5.Travel:0.25±0.1mm

未标注公差尺寸	
METRIC	TOLERANCE
.0	±0.15
.00	±0.10
.000	±0.05

Model.No.		AC	AD	A	AL	AA	AB	B	E	N	NL	C	Y	R	D
L(mm)	3.15	3.35	3.65	3.85	4.35	4.85	5.35	5.85	6.15	6.35	6.55	6.85	7.35	7.85	8.35
X	U	I	M	K	F	G	O	W	L	Q	QS	J	H	HX	HZ
8.85	9.35	9.85	10.35	10.85	11.35	11.85	12.35	12.85	13.35	13.85	14.35	14.85	15.85	16.85	17.85
Z	ZL														
18.85	19.85														

No.	NAME	MATERIAL	NATIONALITY	QTY	FINISHING
1	Stem	PA66	China	1	L≤15.85mm
		PC	Japan	1	L>15.85mm
2	Contact	Phosphor bronze	Korea	1	Contact side sliver plating
3	Case	PA66	China	1	Black
4	Terminal	Brass	China	1	Silver plating
5	Bracket	SPCC-SD	China	1	CuSn plating

www.switch.com.tw

單位	比例	日期	核准	審核	設計繪圖	料號	FLY -1102V(L)-(OF)-(B)-K	頁數	1/1
mm	FREE	2019-05-24	WILLIAM	AMY	EWS	品名	Tact Switch	版本	C
圖號						FLY -1102V(L)-(OF)-(B)-K			

FLYING
INTERNATIONAL