

A

B

C


D

E

Specifications

Current Rating	:3A AC, DC
Voltage rating	:250V AC, DC
Temperature range	: -25°C~+85°C
Contact resistance	:10mΩ Max
Insulation resistance	:1000MΩ Min
Withstanding voltage	:1000 V AC/minute
Pin Material	:Brass
Finished	:Tin-plated
Housing Material	:Nylon-66, UL94 V-0
Color	:Ivory-white

P. C. B. Hole Layout



1




1

2

2

3

3

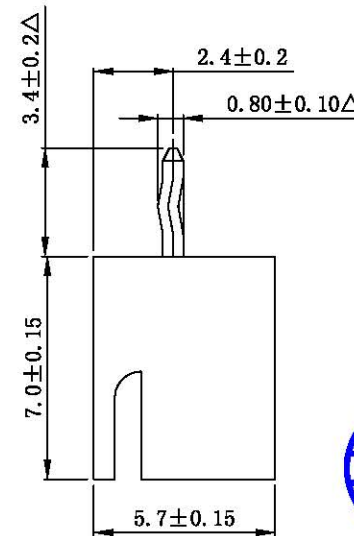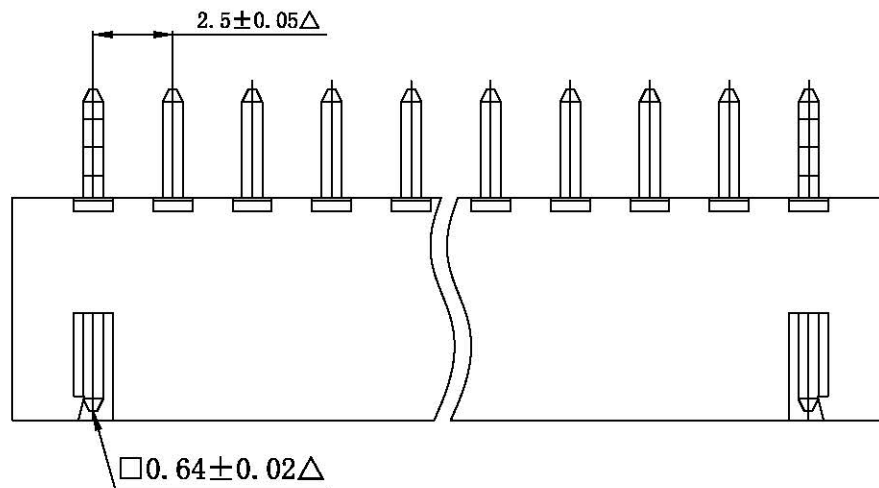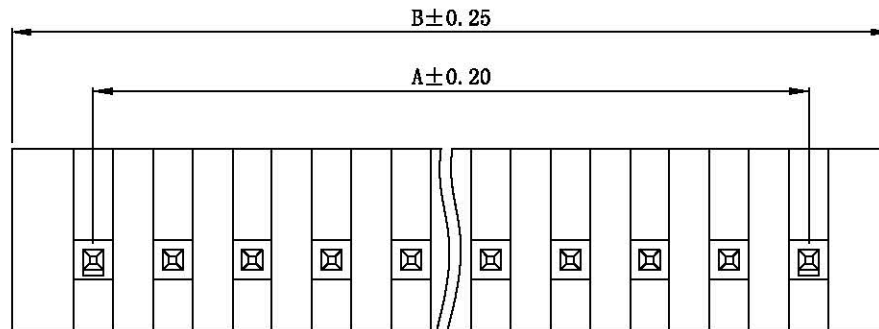

Circuits	Part NO.	Dimension mm	
		A	B
02	CX-W2501-02	2.50	7.60
03	CX-W2501-03	5.00	10.10
04	CX-W2501-04	7.50	12.60
05	CX-W2501-05	10.00	15.10
06	CX-W2501-06	12.50	17.60
07	CX-W2501-07	15.00	20.10
08	CX-W2501-08	17.50	22.60
09	CX-W2501-09	20.00	25.10
10	CX-W2501-10	22.50	27.60
11	CX-W2501-11	25.00	30.10
12	CX-W2501-12	27.50	32.60
13	CX-W2501-13	30.00	35.10
14	CX-W2501-14	32.50	37.60
15	CX-W2501-15	35.00	40.10
16	CX-W2501-16	37.50	42.60
17	CX-W2501-17	40.00	45.10
18	CX-W2501-18	42.50	47.60
19	CX-W2501-19	45.00	50.10
20	CX-W2501-20	47.50	52.60

FLYING
INTERNATIONAL

DESCRIPTION(内容):

2.5mm Wafer 180°打K □ =0.64
(RoHS)

PART NO:
(料 號) CX-W2501-XX

DWG NO(圖號):

DRAWN(製圖):

柴士藏

CHECKED(確認):

柴士藏

APPROVAL(核准):

邓文广

GENERAL TOLERANCE:

(公差)

.0 ±0.20
.00 ±0.15

SCALE(比例):

1:XX



REV:

A/4

UNIT:

mm

SIZE:

A4

SHEET:

1/2

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸 2005.08.13

更新電器特性 2007.04.24

(1D)增加產品顏色標注 2007.07.04

增加PIN針中心到塑膠邊的尺寸 2010.01.21

A



B

C

D



E

FILE NO: CWJ-4E-09

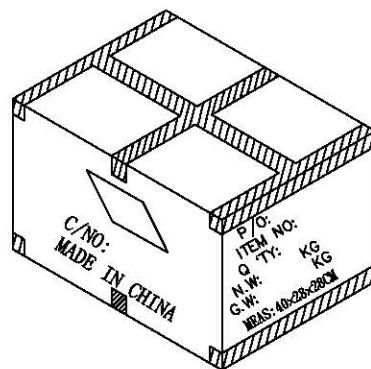

Part No:		料號
Description:		品名規格
Quantity:		數量
Date:		日期

內標籤

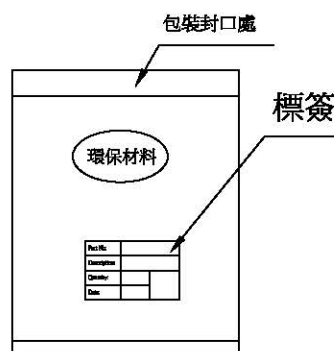

- 紙箱規格：400*280*280mm (單重:620g).
- 封箱方式(看上圖所示)：外箱四周使用透明的封箱膠帶封住,並封成王字型.
- 紙箱上面一定要寫數量、毛重和淨重.

PIN數	包材規格	每袋數量	單重/g	干燥劑數量/pcs
1*02	18X20	1000/PCS	0.19150	
1*03	18X20	1000/PCS	0.28725	
1*04	18X28	1000/PCS	0.38300	
1*05	20X28	1000/PCS	0.47875	1
1*06	20X28	1000/PCS	0.57450	1
1*07	20X28	1000/PCS	0.67025	1
1*08	25X30	1000/PCS	0.76600	1
1*09	25X30	1000/PCS	0.86175	1
1*10	25X30	1000/PCS	0.95750	2
1*11	20X28	500/PCS	1.05325	2
1*12	20X28	500/PCS	1.14900	2
1*13	20X28	500/PCS	1.24475	2
1*14	25X30	500/PCS	1.34050	2
1*15	25X30	500/PCS	1.43625	2
1*16	25X35	500/PCS	1.53200	2
1*17	25X35	500/PCS	1.62775	2
1*18	25X35	500/PCS	1.72350	2
1*19	25X35	500/PCS	1.81925	2
1*20	25X40	500/PCS	1.91500	2

FLYING
INTERNATIONAL

DESCRIPTION(內容)
2.5mm Wafer 180°打K□=0.64
(RoHS)

PART NO:
(料號) CX-W2501-XX(包裝圖)

DWG NO(圖號):

DRAWN(製圖):
李建安

CHECKED(確認):
鄧文廣

APPROVAL(核准):
鄧文廣

GENERAL TOLERANCE:
(公差)

X
XX
XXX

SCALE(比例):
1:XX

REV:
A/3

UNIT:
mm

SIZE:
A4

SHEET:
2/2

REV

1

2

3

DESCRIPTION

圖面有修改

更改包裝規格

4

DATE

2007.10.22

2008.05.26

2011.09.08