


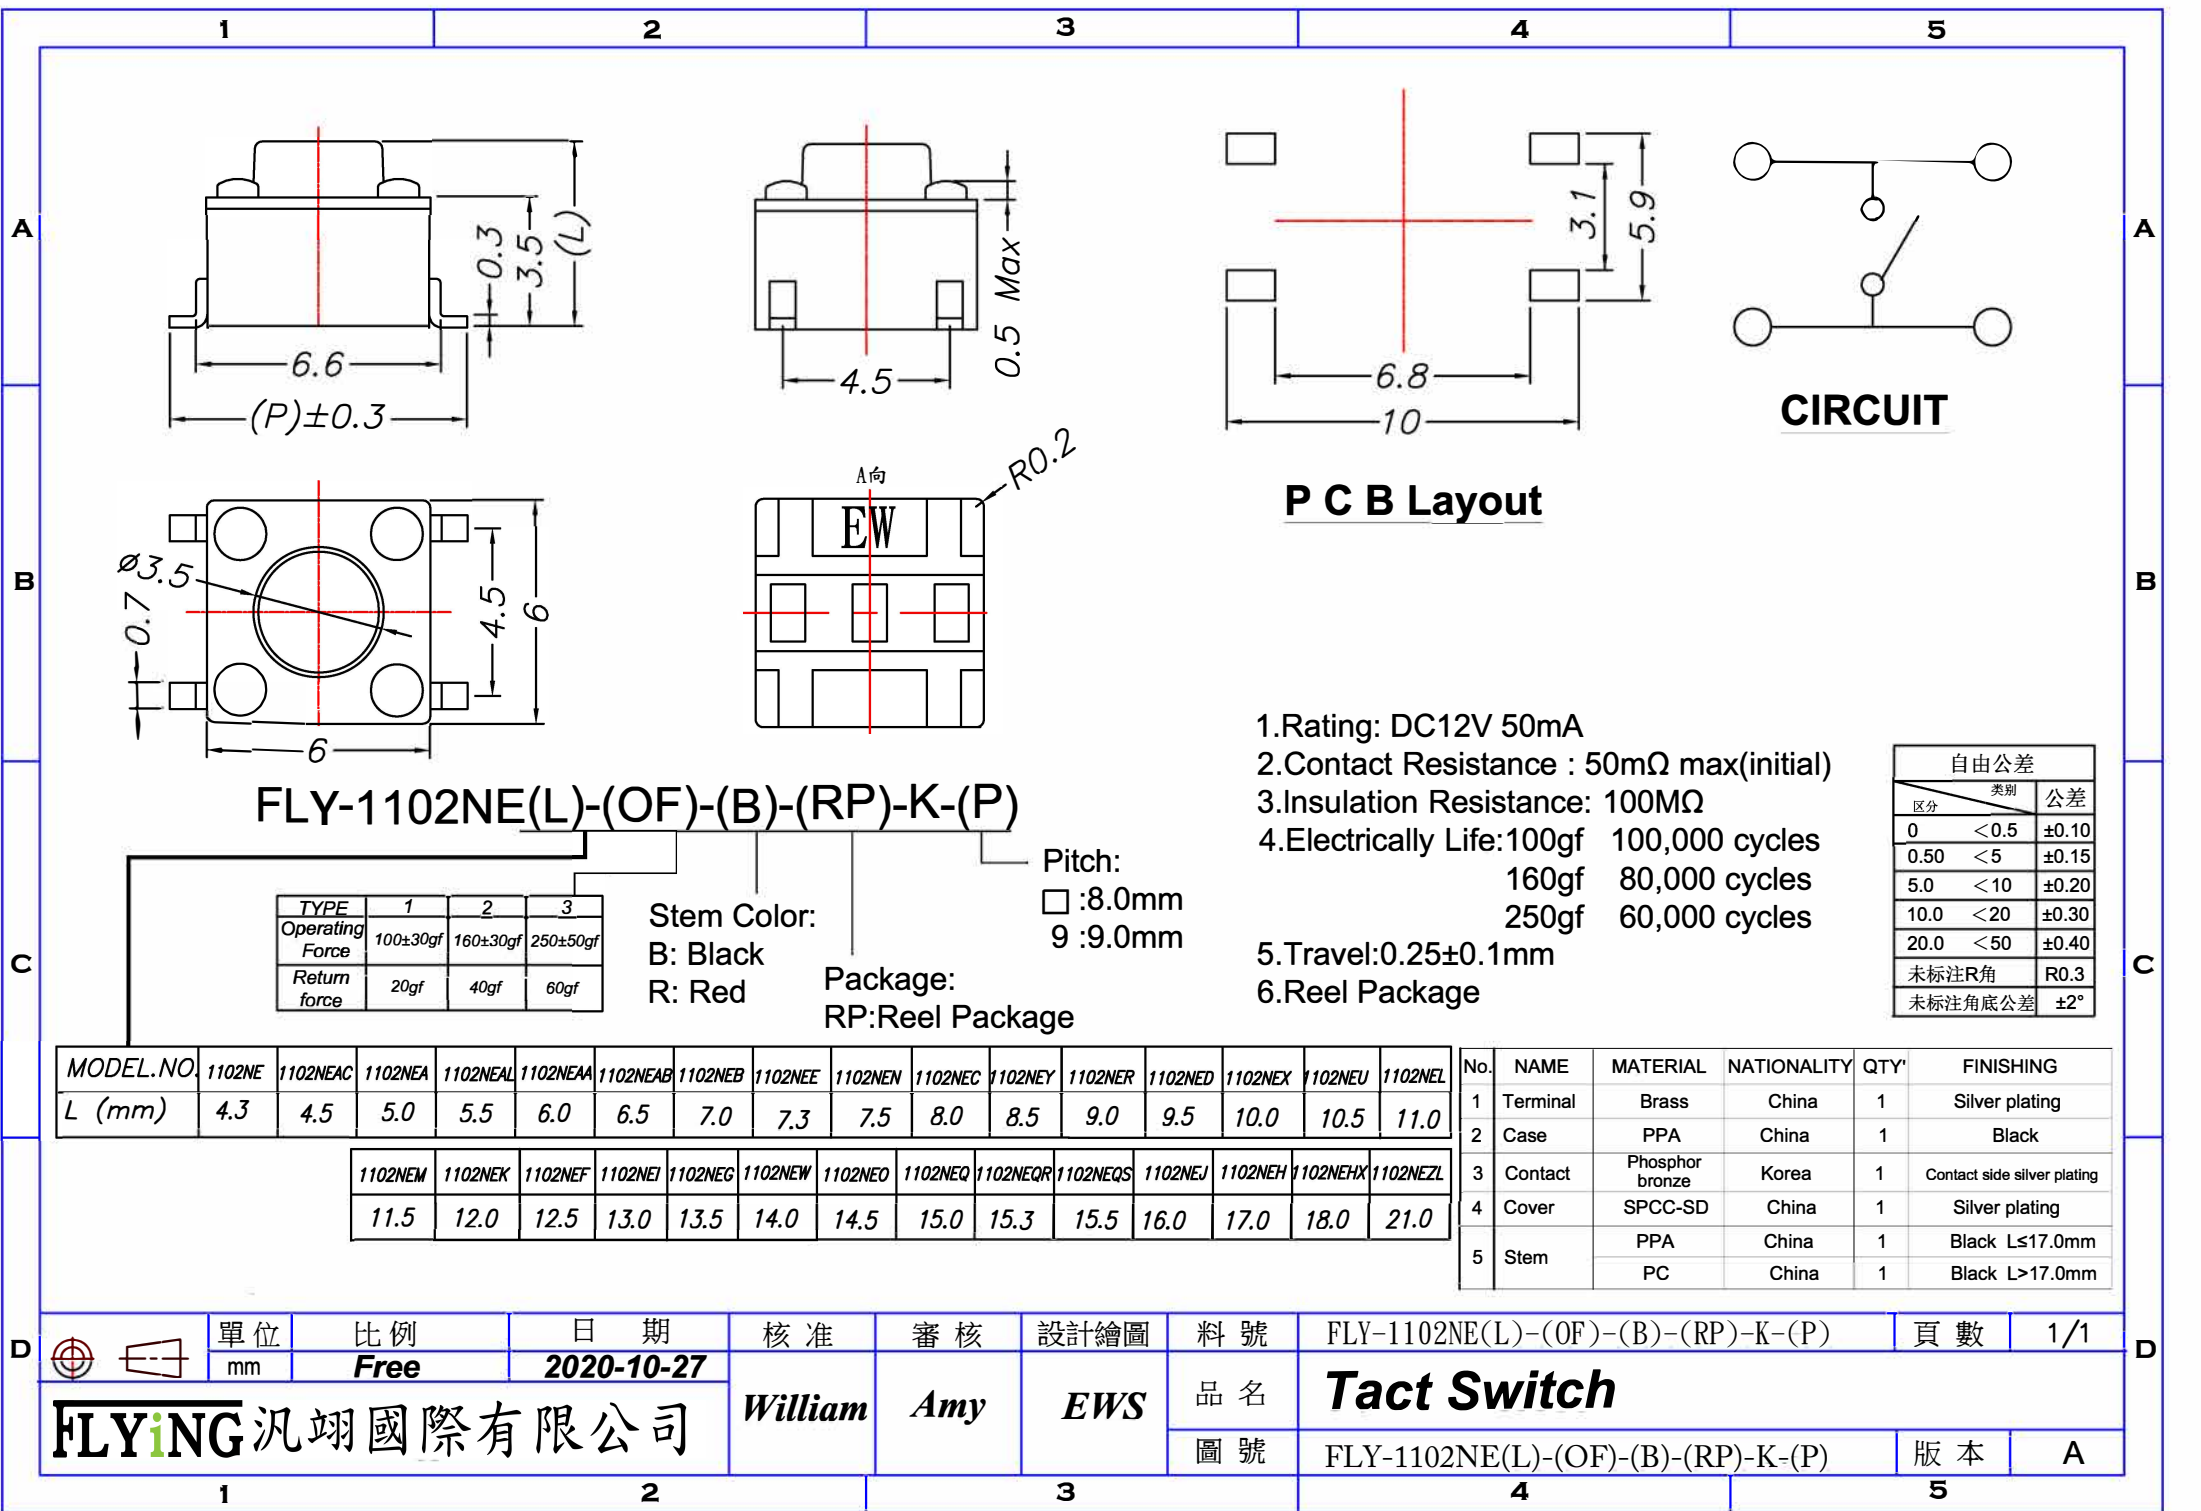

FLY-1102NE(L)-(OF)-(B)-(RP)-K-(P)

TYPE	1	2	3
Operating Force	100±30gf	160±30gf	250±50gf
Return force	20gf	40gf	60gf

Stem Color:
B: Black
R: Red

Package:
RP:Reel Package

Pitch:
□ :8.0mm
9 :9.0mm

- 1.Rating: DC12V 50mA
- 2.Contact Resistance : 50mΩ max(initial)
- 3.Insulation Resistance: 100MΩ
- 4.Electrically Life:100gf 100,000 cycles
160gf 80,000 cycles
250gf 60,000 cycles
- 5.Travel:0.25±0.1mm
- 6.Reel Package

自由公差		
区分	类别	公差
0	<0.5	±0.10
0.50	<5	±0.15
5.0	<10	±0.20
10.0	<20	±0.30
20.0	<50	±0.40
未标注R角		R0.3
未标注角底公差		±2°

MODEL.NO.	1102NE	1102NEAC	1102NEA	1102NEAL	1102NEAA	1102NEAB	1102NEB	1102NEE	1102NEN	1102NEC	1102NEY	1102NER	1102NED	1102NEX	1102NEU	1102NEL
L (mm)	4.3	4.5	5.0	5.5	6.0	6.5	7.0	7.3	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0

1102NEM	1102NEK	1102NEF	1102NEJ	1102NEG	1102NEW	1102NEO	1102NEQ	1102NEQR	1102NEQS	1102NEJ	1102NEH	1102NEHX	1102NEZL
11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.3	15.5	16.0	17.0	18.0	21.0

No.	NAME	MATERIAL	NATIONALITY	QTY'	FINISHING
1	Terminal	Brass	China	1	Silver plating
2	Case	PPA	China	1	Black
3	Contact	Phosphor bronze	Korea	1	Contact side silver plating
4	Cover	SPCC-SD	China	1	Silver plating
5	Stem	PPA	China	1	Black L≤17.0mm
		PC	China	1	Black L>17.0mm

D		單位	比例	日期	核准	審核	設計繪圖	料號	FLY-1102NE(L)-(OF)-(B)-(RP)-K-(P)		頁數	1/1	D
		mm	Free	2020-10-27	William	Amy	EWS	品名	Tact Switch				
		FLYiNG 汎翊國際有限公司						圖號	FLY-1102NE(L)-(OF)-(B)-(RP)-K-(P)		版本	A	
		1			2		3		4		5		