

 FUZETEC TECHNOLOGY CO., LTD.	NO.	PQ15-101E		
Product Specification and Approval Sheet	Version	A0	Page	1/3

Radial Leaded PTC Resettable Fuse: FRT Series

1. Summary

- (a) **RoHS Compliant (Lead Free) Product**
- (b) Applications: IEEE 1394 FireWire, Computers & Consumer electronics
- (c) Product Features: Fast trip time, Lower Trip-to-hold Ratio, Radial-leaded product ideal for up to 36VDC
- (d) Operation Current: 0.50A~2.50A
- (e) Maximum Voltage: 36VDC
- (f) Temperature Range : -40°C to 85°C

2. Agency Recognition

UL: File No. E211981
C-UL: File No. E211981
TÜV: File No. R50004084


3. Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max.Time To Trip	Max. Current	Rated Voltage	Typ. Power	Resistance	
	I _H , A	I _T , A	at 5xI _H ,s	I _{MAX} , A	V _{MAX} , VDC	P _d , W	R _{MIN}	R _{1MAX}
	I _H , A	I _T , A	at 5xI _H ,s	I _{MAX} , A	V _{MAX} , VDC	P _d , W	Ohms	Ohms
FRT050-33F	0.50	1.10	5.0	40	36	0.67	0.140	0.448
FRT075-33F	0.75	1.50	4.0	40	36	0.71	0.115	0.368
FRT090-33F	0.90	1.80	3.5	40	36	0.74	0.090	0.288
FRT120-33F	1.20	2.30	3.5	40	36	0.78	0.074	0.180
FRT135-33F	1.35	2.50	4.5	40	36	0.84	0.059	0.143
FRT160-33F	1.60	2.75	4.5	40	36	0.86	0.041	0.131
FRT190-33F	1.90	3.00	3.5	40	36	0.90	0.045	0.092
FRT220-33F	2.20	3.50	6.5	40	36	0.95	0.025	0.080
FRT250-33F	2.50	4.00	8.0	40	36	0.99	0.020	0.064

I_H=Hold current-maximum current at which the device will not trip at 23°C still air.
I_T=Trip current-minimum current at which the device will always trip at 23°C still air.
V_{MAX}=Maximum voltage device can withstand without damage at its rated current.
I_{MAX}= Maximum fault current device can withstand without damage at rated voltage (V_{MAX}).
P_d=Typical power dissipated from device when in tripped state in 23°C still air environment.
R_{MIN}=Minimum device resistance at 23°C.
R_{1MAX}=Maximum device resistance at 23°C, 1 hour after tripping .
Physical specifications:
Lead material: Tin plated copper, 24 AWG.
Soldering characteristics:MIL-STD-202, Method 208E.
Insulating coating:Flame retardant epoxy, meets UL-94V-0 requirement.

 FUZETEC TECHNOLOGY CO., LTD.	NO.	PQ15-101E		
Product Specification and Approval Sheet	Version	A0	Page	2/3


4. Production Dimensions (millimeter)



Lead Size :24AWG
 Φ 0.51 mm Diameter

Part Number	A	B	C	D	E	F
	Maximum	Maximum	Typical	Minimum	Maximum	Typical
FRT050-33F	7.4	12.2	5.1	7.6	3.0	1.1
FRT075-33F	7.4	12.2	5.1	7.6	3.0	1.1
FRT090-33F	7.4	12.2	5.1	7.6	3.0	1.1
FRT120-33F	7.4	12.2	5.1	7.6	3.0	1.1
FRT135-33F	7.4	14.2	5.1	7.6	3.0	1.1
FRT160-33F	7.4	14.0	5.1	7.6	3.0	1.1
FRT190-33F	9.0	13.5	5.1	7.6	3.0	1.1
FRT220-33F	10.0	17.0	5.1	7.6	3.0	1.1
FRT250-33F	10.0	19.5	5.1	7.6	3.0	1.1

5. Thermal Derating Curve

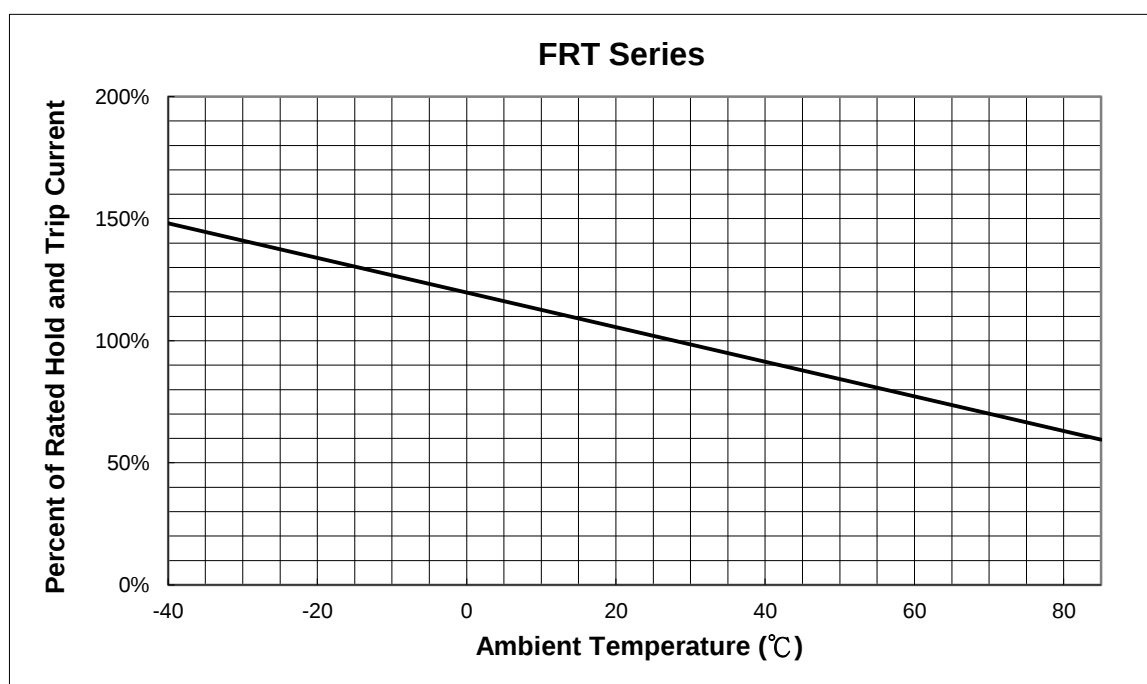


NOTE : Specification subject to change without notice.



6. Typical Time-To-Trip at 23°C

A= FRT050-33F
B= FRT075-33F
C= FRT090-33F
D= FRT120-33F
E= FRT135-33F
F= FRT160-33F
G= FRT190-33F
H= FRT220-33F
I = FRT250-33F

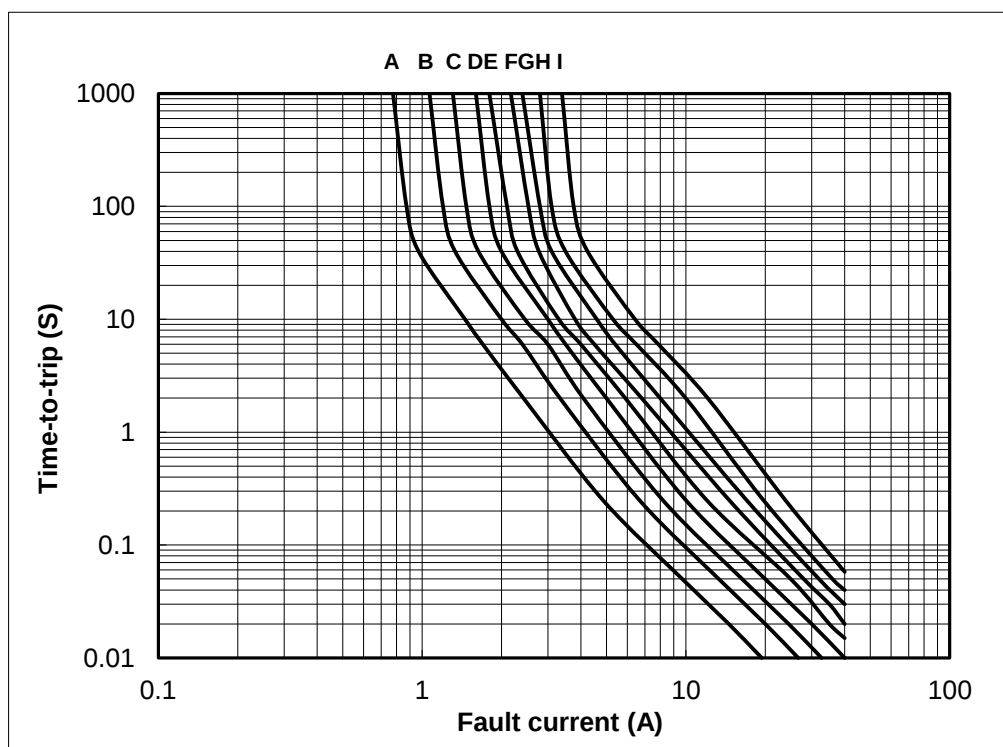

7. Material Specification

Lead material : Tin plated copper, 24 AWG.



Soldering characteristics: MIL-STD-202, Method 208E.

Insulating coating: Flame retardant epoxy, meets UL-94V-0 requirement.

8. Part Numbering and Marking System


Part Numbering System

FRT □ □ □ — □ □ F

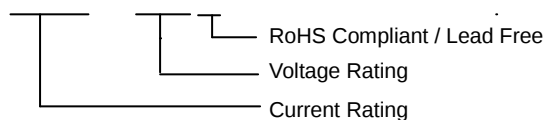

Example

Part Marking System

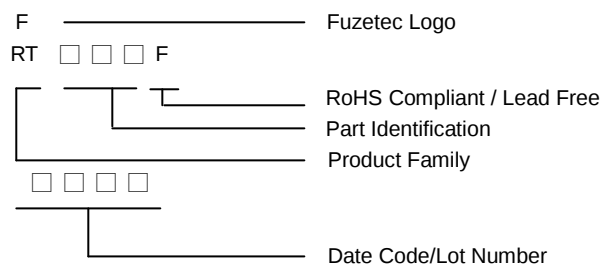

Note: Font on Marking may look slightly different due to fine turnings of each Marking printer.

Warning: -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.

-Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.



NOTE : Specification subject to change without notice.