

7		8	
REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

- a.HOUSING:PPA
b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING: Au1u")

SEE ORDERING INFORMATION

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -25° C~ +85° C

ORDERING INFORMATION

F-08-B***016

電池盒系列

F-08系列

SMT 180° TYPE






— PLATING:
A—Au1U"
J—Ni100U"~120U"
K—Sn100U"~120U"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程 部

2017-06-28

ZW DANG

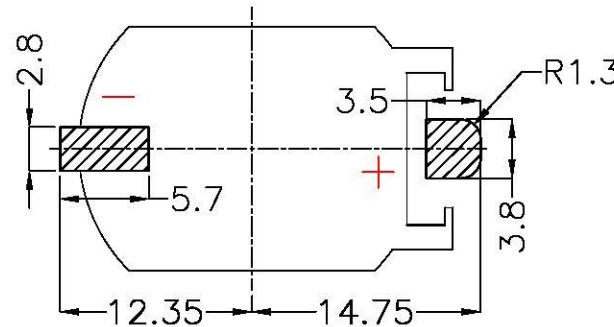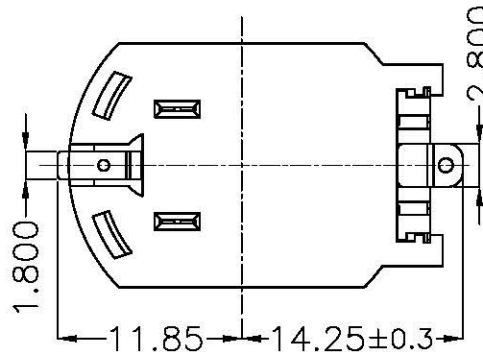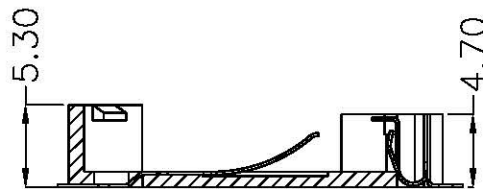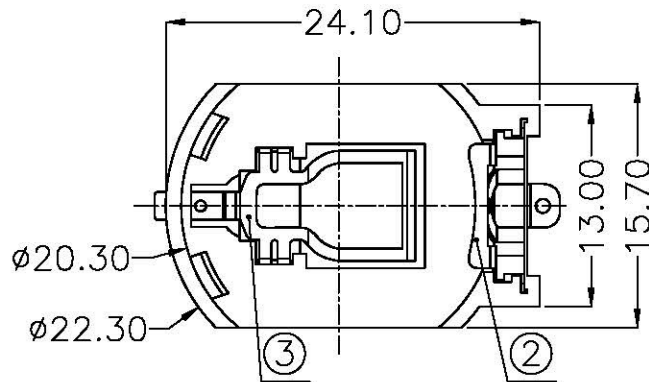

PCB Layout Diagram

Top View

3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPA	BROWN
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		FLYiNG INTERNATIONAL				汎翊國際有限公司			
DECIMALS: X ±0.30 X.X ±0.25 X.XX ±0.20 X.XXX ±0.10		ANGLES: X ±1° X.X ±0.5°		DSND	YangFeng	DATE	2017-06-28	TITLE:	
WEIGHT: 0.86g		CHKD		ZhouRuicai	DATE	2017-06-28	F-2032-8KC 0.7 SMT		
		APVD		XueShunyang	DATE	2017-06-28	PART NO.:		
		SCALE: 2:1		SIZE: A4	VIEW:			F-08-B2AA016	
SHEET 1 OF 1		UNIT: mm		REV.: A/0	OBJECT: MY	DRAW NO.:MY-CP-0076			