

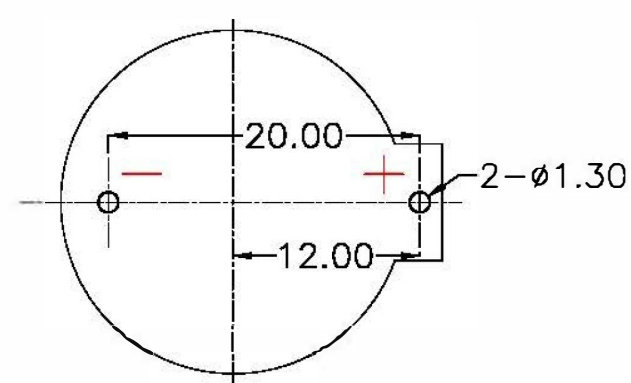
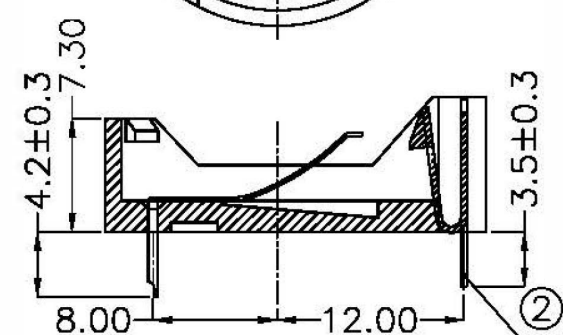


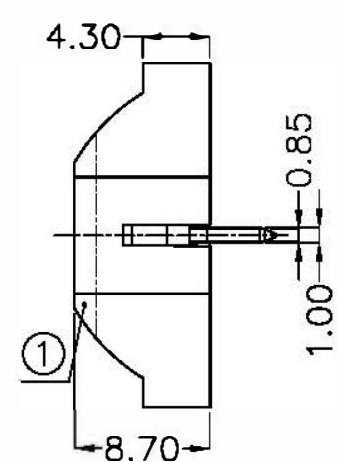

REV.	ECN NO.	REVISED	DATE

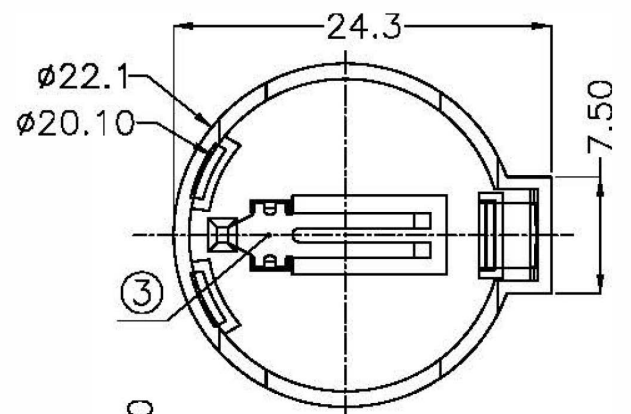

PCB Layout Diagram
Top View

NOTE:

- 1.MATERIAL:
a.HOUSING:PBT
b.CONTACT:BRASS
(SURFACE PLATING:Sn=100u"-120u")
SEE ORDERING INFORMATION
- 2.ELECTRIC:
a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -25°C~ +85°C

ORDERING INFORMATION

F-02-A***001

電池盒系列

F-02系列

DIP 90° TYPE

PLATING:
A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK



NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR
3	TERMINAL(-)	1	BRASS, T=0.20mm	Sn Plating
2	TERMINAL(+)	1	BRASS, T=0.40mm	Sn Plating
1	HOUSING	1	PBT	BLACK

UN LESS OTHERWISE SPECIFIED TOLERANCES		FLYING 汎翊國際有限公司 INTERNATIONAL			
DECIMALS:	ANGLES:	DSND	YangFeng	DATE	2017-12-14
X ±0.30	X ±1°	CHKD	ZhouRuicai	DATE	2017-12-14
.X ±0.25	X ±0.5°	APVD	XueShunyang	DATE	2017-12-14
X.XX ±0.20		SCALE: 2:1	SIZE: A4	VIEW: ④ ⑤	
X.XXX ±0.10		UNIT: mm	REV.: A/0	OBJECT: MY	
WEIGHT: 1.65g		SHEET 1 OF 1			
		TITLE:		F-2032-2-1 Sn DIP	
		PART NO.:		F-02-A1AK001	
		DRAW NO.:		WD-CP-0009	