

7		8	
REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

a.HOUSING:PPA

b.CONTACT:PHOSPHOR BRONZE

(SURFACE PLATING: Au1U")

SEE ORDERING INFORMATION

2.ELECTRIC:

a.CONTACT RESISTANCE: 30 MILLIOHMS MAX

b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL

d.OPERATING TEMPERATURE: -25°C~ +85°C

ORDERING INFORMATION

F-08-B***008

電池盒系列

F-08系列

SMT 180° TYPE






- A-Au1U"
- J-Ni100U"~120U"
- K-Sn100U"~120U"
- L-Ni50U"- Sn80U"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程 部

2017-06-30

ZW DANG

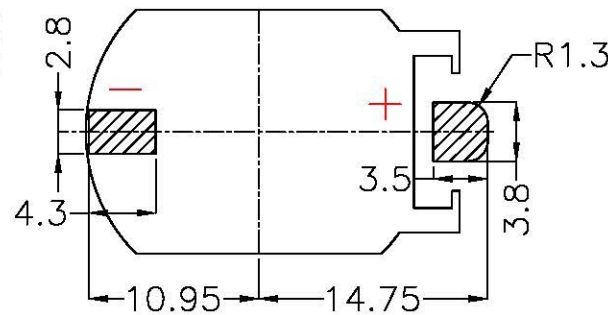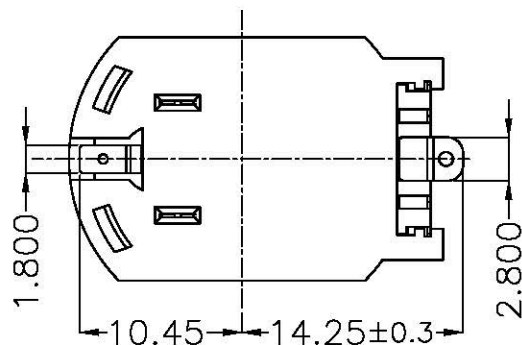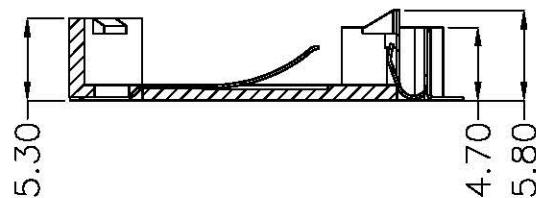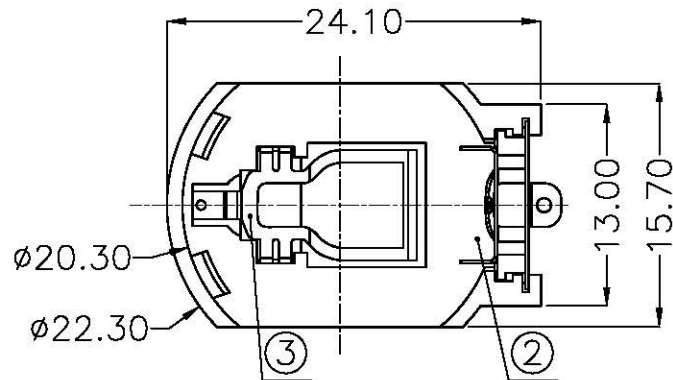

PCB Layout Diagram

Top View

3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.25mm	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPA	BROWN
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		FLYING 汎翊國際有限公司 INTERNATIONAL				
DECIMALS: X ±0.30 X ±1° X.X ±0.25 X.X ±0.5° X.XX ±0.20 X.XXX ±0.10		DSND	YangFeng	DATE	2017-06-30	TITLE:
		CHKD	ZhouRuicai	DATE	2017-06-30	F-2032-8KG SMT
		APVD	XueShunyang	DATE	2017-06-30	PART NO.:
WEIGHT: 0.92g		SCALE: 2:1	SIZE: A4	VIEW: 	F-08-B2AA008	
SHEET 1 OF 1		UNIT: mm	REV.: A/0	OBJECT: MY	DRAW NO.:MY-CP-0077	