

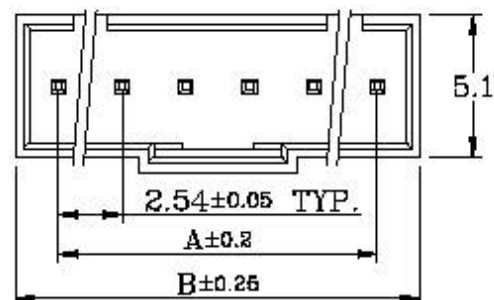

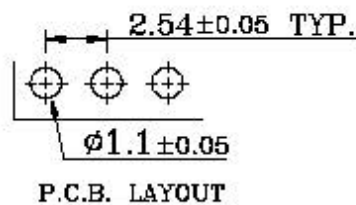


2 Circuit

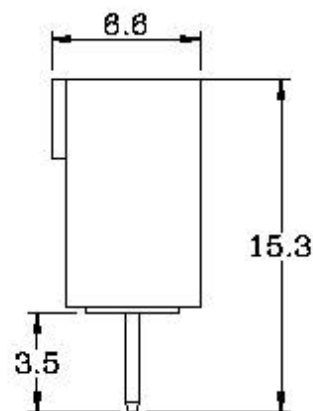

3 Circuit

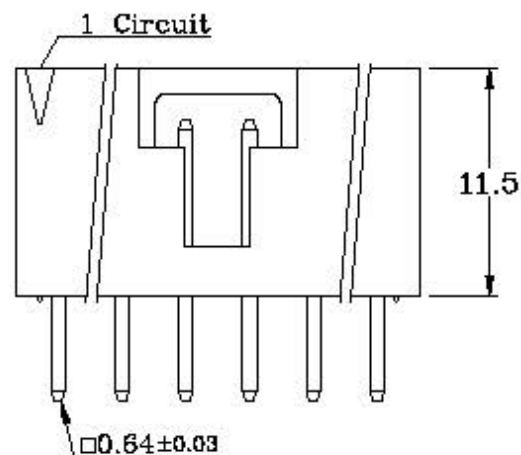

所有材料為
"環保材料"
2006.11.14
RoHS

Specifications:

- Material:
Base: Polyester 94V-0, PBT+30% glass-filled
Contact: Brass, Gold-Plated
- Voltage Rating: 250V
- Current Rating: 3A
- Withstand Voltage: 1000V AC/Minute
- Insulation Resistance: 1000MΩ min.
- Temperature Range: -25°C~+85°C
- Contact Resistance: Initial value/10mΩ max.
After environmental testing/20mΩ max.

Dimensional & Ordering Information:

Circuits	Part No	Dimensions mm	
		A	B
2	CPU-02S	2.54	7.62
3	CPU-03S	5.08	10.16
4	CPU-04S	7.62	12.70
5	CPU-05S	10.16	15.24
6	CPU-06S	12.70	17.78
7	CPU-07S	15.24	20.32
8	CPU-08S	17.78	22.86
9	CPU-09S	20.32	25.40
10	CPU-10S	22.86	27.94
11	CPU-11S	25.40	30.48
12	CPU-12S	27.94	33.02

FLYiNG

DESCRIPTION(內容):
2.54mm (.100") Pitch
Wire-to-Board Header

PART NO:
(料號) CPU-XXS
DWG NO(圖號): 2545-ST

DRAWN(製圖):
jamie
CHECKED(確認):
MANDY
APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差)
.000 : ±0.08
.00 : ±0.13
.0 : ±0.25

SCALE(比例):
FREE

REV:
R2
UNIT:
mm
SIZE:
A4
SHEET:
1/1

REV
R0
R1
R2
R3

DESCRIPTION

環保料

2007年圖面版本更新



變更電鍍成份

DATE


2007.08.11

2007.10.09

2008.05.08

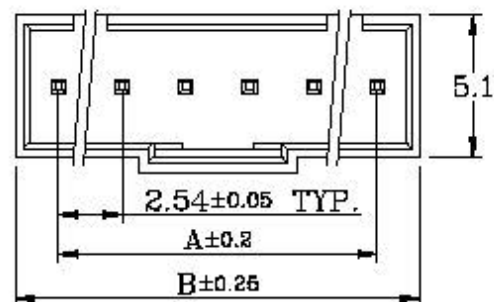

2 Circuit



3 Circuit

Specifications:

•Material:

Base: Polyester 94V-0, PBT+30% glass-filled

Contact: Brass, Gold-Plated

•Voltage Rating: 250V




•Current Rating: 3A

•Withstand Voltage: 1000V AC/Minute

•Insulation Resistance: 1000MΩ min.

•Temperature Range: -25°C~+85°C

•Contact Resistance: Initial value/10mΩ max.
After environmental testing/20mΩ max.

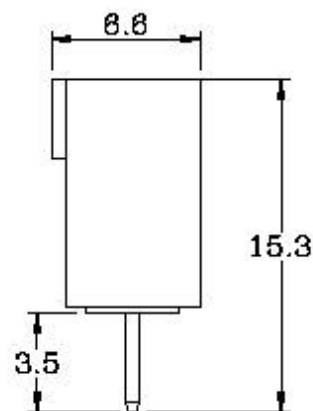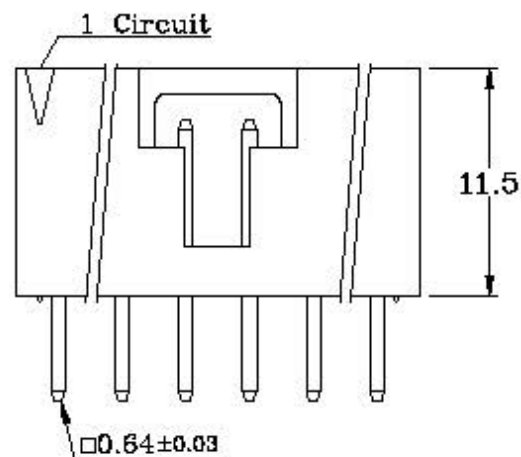

P.C.B. LAYOUT

所有材料為
“環保材料”

2006.11.14

RoHS

Dimensional & Ordering Information:

Circuits	Part No	Dimensions mm	
		A	B
13	CPU-13S	30.48	35.56
14	CPU-14S	33.02	38.10
15	CPU-15S	35.56	40.64
16	CPU-16S	38.10	43.18
17	CPU-17S	40.64	45.72
18	CPU-18S	43.18	48.26

NOTE: MOQ 200KPIN

FLYiNG

DESCRIPTION(內容):
2.54mm (.100") Pitch
Wire-to-Board Header

PART NO:
(料號) CPU-XXS
DWG NO(圖號): 2545-ST

DRAWN(製圖):
JAMIE

CHECKED(確認):
MANDY

APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差)

.000 : ±0.08

.00 : ±0.13

.0 : ±0.25

SCALE(比例):

FREE



REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

DATE

2007.10.09

變更電鍍成份

2008.05.08