

## 2N70K-MT

Power MOSFET

2A, 700V N-CHANNEL  
POWER MOSFET


## ■ DESCRIPTION

The UTC **2N70K-MT** is a high voltage MOSFET designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and high rugged avalanche characteristics. This power MOSFET is usually used at high speed switching applications in power supplies, PWM motor controls, high efficient DC to DC converters and bridge circuits.

## ■ FEATURES

- \*  $R_{DS(ON)} < 5.5\Omega$  @  $V_{GS} = 10V$ ,  $I_D = 1.0 A$
- \* Fast switching capability
- \* Avalanche energy specified
- \* Improved dv/dt capability, high ruggedness

## ■ SYMBOL




## ■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
2N70KL-TF3-T	2N70KG-TF3-T	TO-220F	G	D	S	Tube
2N70KL-TF1-T	2N70KG-TF1-T	TO-220F1	G	D	S	Tube
2N70KL-TF2-T	2N70KG-TF2-T	TO-220F2	G	D	S	Tube
2N70KL-TF3T-T	2N70KG-TF3T-T	TO-220F3	G	D	S	Tube
2N70KL-TM3-T	2N70KG-TM3-T	TO-251	G	D	S	Tube
2N70KL-TMS-T	2N70KG-TMS-T	TO-251S	G	D	S	Tube
2N70KL-TN3-R	2N70KG-TN3-R	TO-252	G	D	S	Tape Reel
2N70KL-TND-R	2N70KG-TND-R	TO-252D	G	D	S	Tape Reel

Note: Pin Assignment: G: Gate   D: Drain   S: Source

2N70KL-TF3-T  	(1) Packing Type	(1) T: Tube, R: Tape Reel
	(2) Package Type	(2) TF3: TO-220F, TF1: TO-220F1, TF1: TO-220F2 TF3T: TO-220F3, TM3: TO-251, TMS: TO-251S TN3: TO-252, TND: TO-252D
	(3) Green Package	(3) L: Lead Free, G: Halogen Free and Lead Free

## ■ MARKING

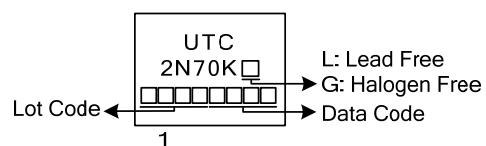

■ ABSOLUTE MAXIMUM RATINGS ( $T_c = 25^\circ\text{C}$ , unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		$V_{DSS}$	700	V
Gate-Source Voltage		$V_{GSS}$	$\pm 30$	V
Drain Current	Continuous	$I_D$	2.0	A
	Pulsed (Note 2)	$I_{DM}$	8.0	A
Avalanche Energy	Single Pulsed (Note 3)	$E_{AS}$	100	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	4.5	V/ns
Power Dissipation	TO-220F/TO-220F1	$P_D$	28	W
	TO-220F3		29	W
	TO-220F2		30	W
	TO-251/TO-251S			
	TO-252/TO-252D			
Junction Temperature		$T_J$	+150	$^\circ\text{C}$
Operating Temperature		$T_{OPR}$	-55 ~ +150	$^\circ\text{C}$
Storage Temperature		$T_{STG}$	-55 ~ +150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating : Pulse width limited by  $T_J$ .

3.  $L=50\text{mH}$ ,  $I_{AS}=2.0\text{A}$ ,  $V_{DD}=50\text{V}$ ,  $R_G=25\ \Omega$ , Starting  $T_J = 25^\circ\text{C}$

4.  $I_{SD} \leq 2.0\text{A}$ ,  $di/dt \leq 200\text{A}/\mu\text{s}$ ,  $V_{DD} \leq BV_{DSS}$ , Starting  $T_J = 25^\circ\text{C}$

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-220F/TO-220F1/ TO-220F2/TO-220F3	$\theta_{JA}$	62.5	$^\circ\text{C/W}$
	TO-251/TO-251S TO-252/TO-252D		110	$^\circ\text{C/W}$
Junction to Case	TO-220F/TO-220F1 TO-220F3	$\theta_{JC}$	4.46	$^\circ\text{C/W}$
	TO-220F2		4.35	$^\circ\text{C/W}$
	TO-251/TO-251S TO-252/TO-252D		4.24	$^\circ\text{C/W}$

■ ELECTRICAL CHARACTERISTICS ( $T_J=25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>OFF CHARACTERISTICS</b>						
Drain-Source Breakdown Voltage	$\text{BV}_{\text{DSS}}$	$V_{\text{GS}} = 0\text{V}, I_{\text{D}} = 250\mu\text{A}$	700			V
Drain-Source Leakage Current	$I_{\text{DSS}}$	$V_{\text{DS}} = 700\text{V}, V_{\text{GS}} = 0\text{V}$		10		$\mu\text{A}$
Gate-Source Leakage Current	Forward $I_{\text{GSS}}$	$V_{\text{GS}} = 30\text{V}, V_{\text{DS}} = 0\text{V}$		100		nA
	Reverse	$V_{\text{GS}} = -30\text{V}, V_{\text{DS}} = 0\text{V}$		-100		nA
Breakdown Voltage Temperature Coefficient	$\triangle \text{BV}_{\text{DSS}}/\triangle T_J$	$I_{\text{D}} = 250 \mu\text{A}$ , Referenced to $25^\circ\text{C}$		0.4		$\text{V}/^\circ\text{C}$
<b>ON CHARACTERISTICS</b>						
Gate Threshold Voltage	$V_{\text{GS(TH)}}$	$V_{\text{DS}} = V_{\text{GS}}, I_{\text{D}} = 250\mu\text{A}$	2.0		4.0	V
Static Drain-Source On-State Resistance	$R_{\text{DS(ON)}}$	$V_{\text{GS}} = 10\text{V}, I_{\text{D}} = 1.0\text{A}$			5.5	$\Omega$
<b>DYNAMIC CHARACTERISTICS</b>						
Input Capacitance	$C_{\text{ISS}}$	$V_{\text{DS}} = 25\text{V}, V_{\text{GS}} = 0\text{V}, f = 1\text{MHz}$		258		pF
Output Capacitance	$C_{\text{OSS}}$			31		pF
Reverse Transfer Capacitance	$C_{\text{RSS}}$			4.6		pF
<b>SWITCHING CHARACTERISTICS</b>						
Turn-On Delay Time	$t_{\text{D (ON)}}$	$V_{\text{DD}} = 30\text{V}, I_{\text{D}} = 0.5\text{A}, R_{\text{G}} = 25\Omega$ (Note 1, 2)		39.5		ns
Turn-On Rise Time	$t_{\text{R}}$			38.5		ns
Turn-Off Delay Time	$t_{\text{D(OFF)}}$			50		ns
Turn-Off Fall Time	$t_{\text{F}}$			21		ns
Total Gate Charge	$Q_{\text{G}}$	$V_{\text{DS}} = 50\text{V}, I_{\text{D}} = 1.3\text{A}, V_{\text{GS}} = 10\text{V}$ (Note 1, 2)		10.4		nC
Gate-Source Charge	$Q_{\text{GS}}$			5.3		nC
Gate-Drain Charge	$Q_{\text{GD}}$			2.0		nC
<b>DRAIN-SOURCE DIODE CHARACTERISTICS</b>						
Drain-Source Diode Forward Voltage	$V_{\text{SD}}$	$V_{\text{GS}} = 0\text{V}, I_{\text{SD}} = 2.0\text{ A}$			1.4	V
Continuous Drain-Source Current	$I_{\text{SD}}$				2.0	A
Pulsed Drain-Source Current	$I_{\text{SM}}$				8.0	A

Notes: 1. Pulse Test: Pulse width  $\leq 300\mu\text{s}$ , Duty cycle  $\leq 2\%$ 

2. Essentially independent of operating temperature

■ TEST CIRCUITS AND WAVEFORMS

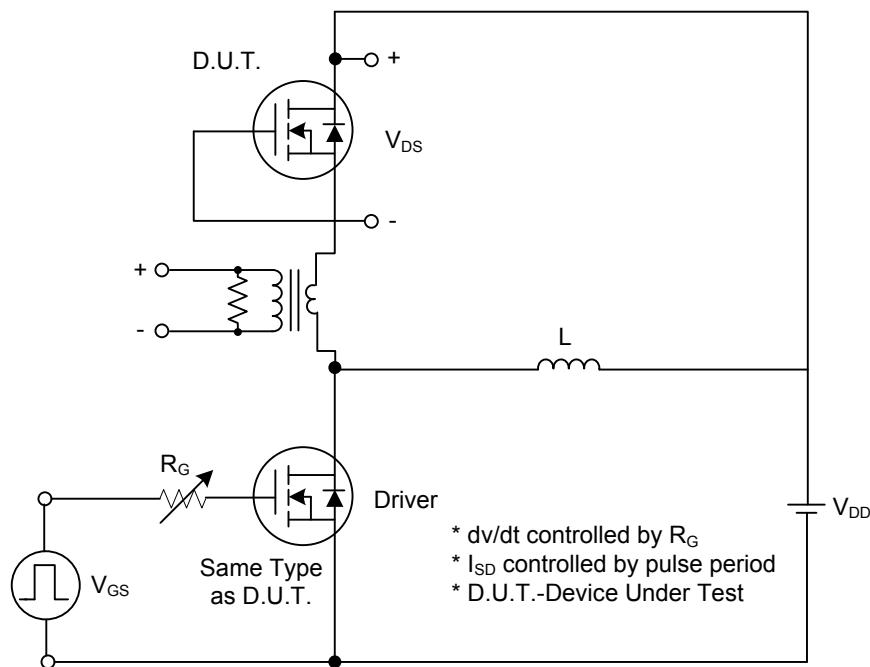


Fig. 1A Peak Diode Recovery dv/dt Test Circuit

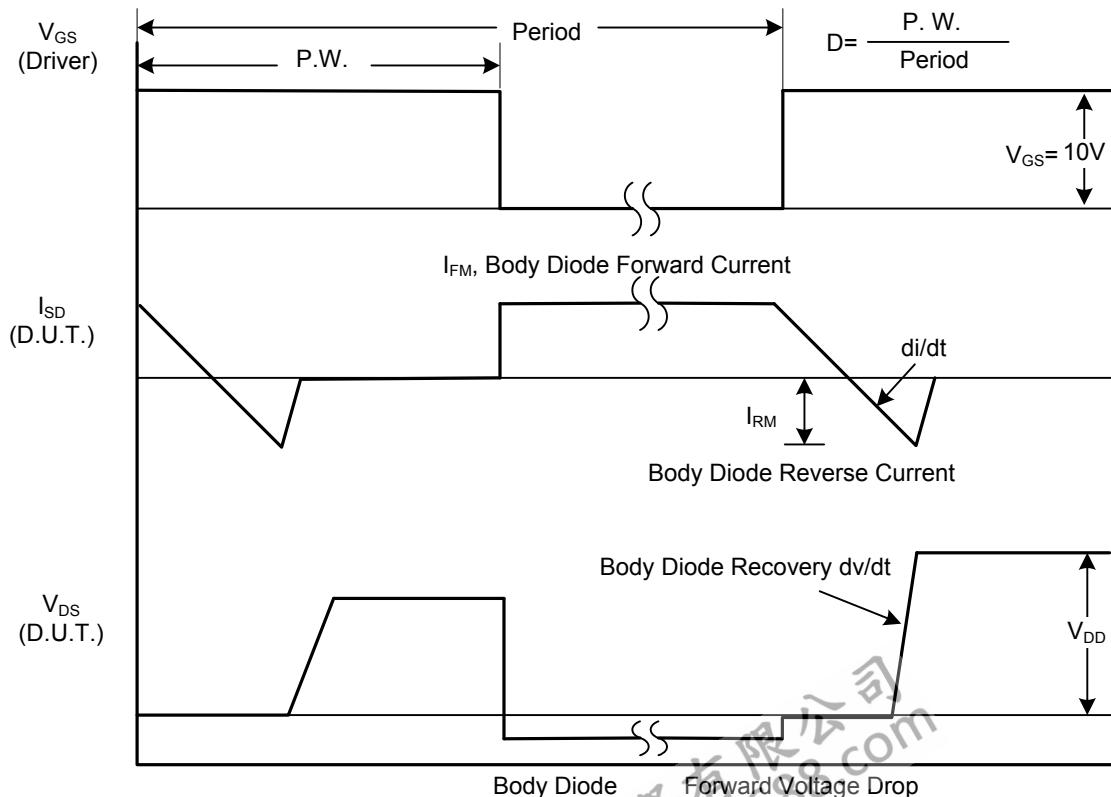


Fig. 1B Peak Diode Recovery dv/dt Waveforms

### ■ TEST CIRCUITS AND WAVEFORMS (Cont.)

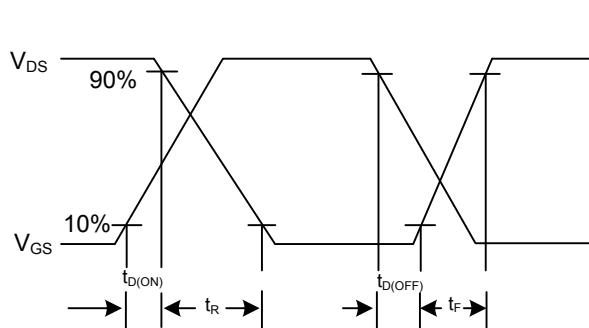
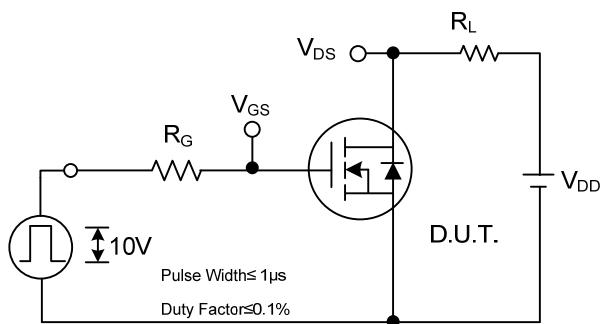


Fig. 2A Switching Test Circuit

Fig. 2B Switching Waveforms

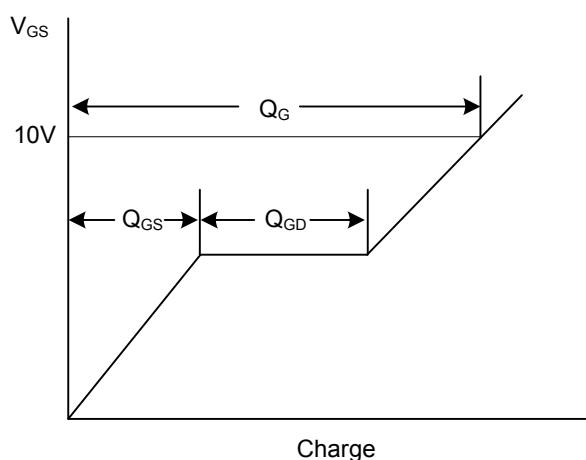
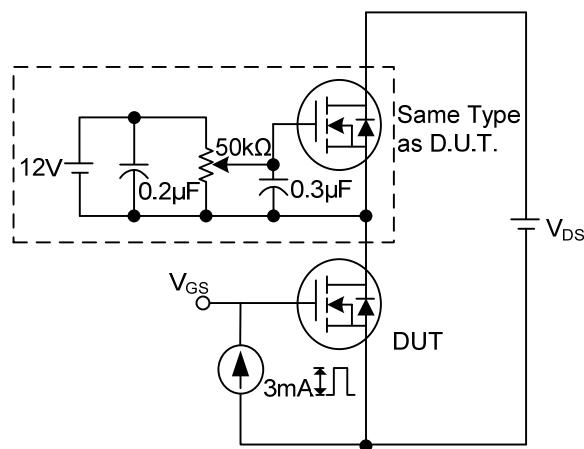


Fig. 3A Gate Charge Test Circuit

Fig. 3B Gate Charge Waveform






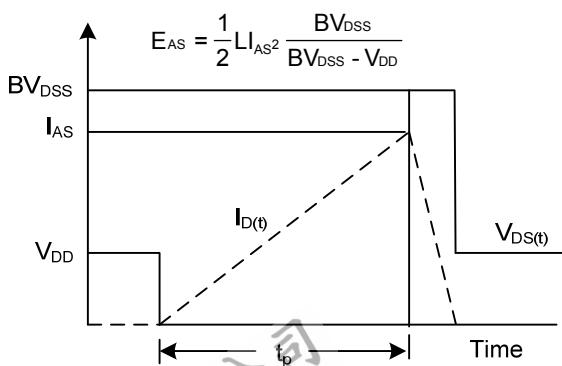


Fig. 4A Unclamped Inductive Switching Test Circuit

Fig. 4B Unclamped Inductive Switching Waveforms

■ TYPICAL CHARACTERISTICS

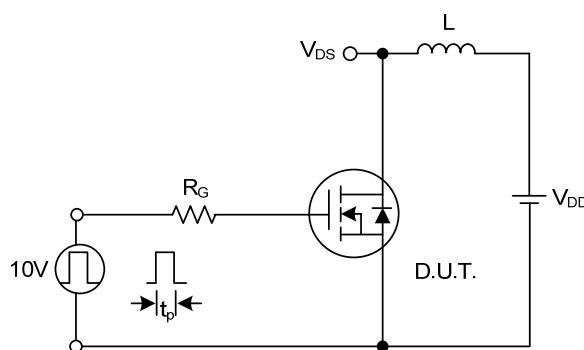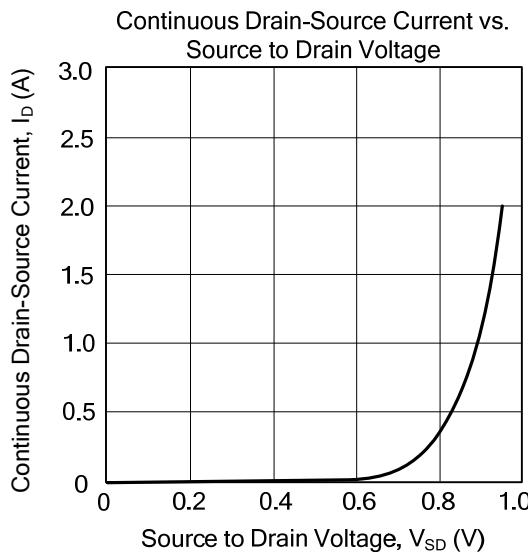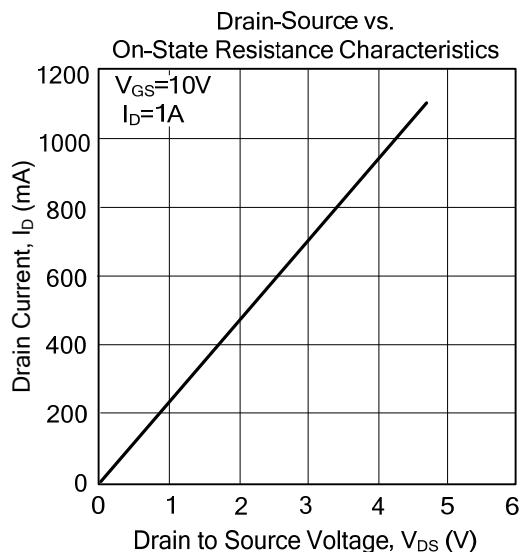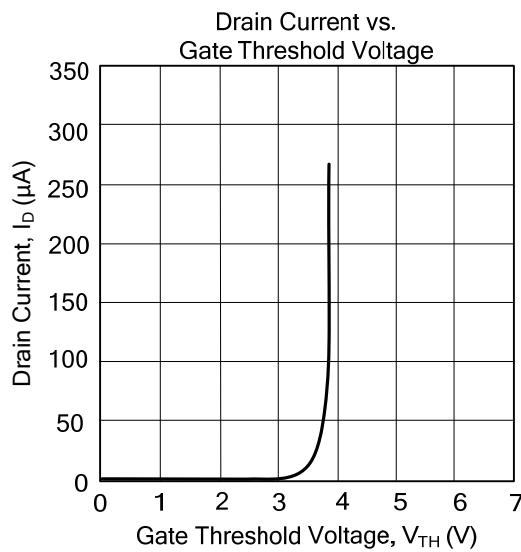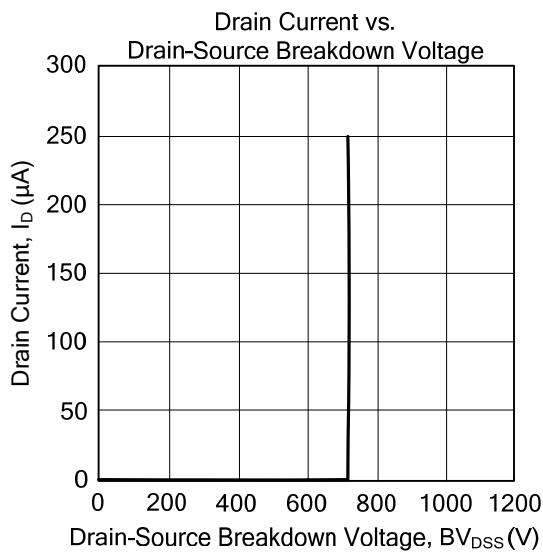

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.