



## 2SC4226

Preliminary


**NPN SILICON TRANSISTOR**

### NPN SILICON EPITAXIAL TRANSISTOR

#### DESCRIPTION

The UTC **2SC4226** is a low supply voltage transistor designed for VHF, UHF low noise amplifier.

It is suitable for a high density surface mount assembly since the transistor has applied small mini mold package.

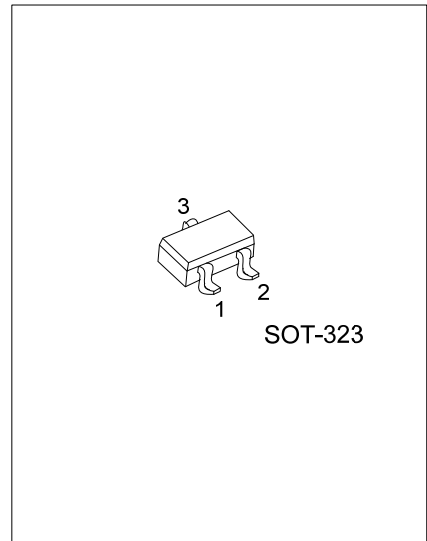


#### ORDERING INFORMATION

Order Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
2SC4226L-xxx-AL3-R	2SC4226G-xxx-AL3-R	SOT-323	B	E	C	Tape Reel

Note: Pin Assignment: B: Base E: Emitter C: Collector

<p>2SC4226G-xxx-AL3-R</p>	<p>(1) R: Tape Reel</p> <p>(2) AL3: SOT-323</p> <p>(3) xxx: refer to Classification of <math>h_{FE}</math></p> <p>(4) G: Halogen Free and Lead Free, L: Lead Free</p>
---------------------------	---

#### MARKING

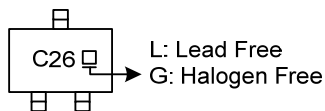

FLYING 汎翔國際有限公司  
www.flying1688.com

■ ABSOLUTE MAXIMUM RATING ( $T_A=25^{\circ}\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Collector-Base Voltage	$BV_{CBO}$	20	V
Collector-emitter voltage	$BV_{CEO}$	12	V
Emitter-Base Voltage	$BV_{EBO}$	3	V
Collector Current	$I_C$	100	mA
Collector Dissipation	$P_C$	150	mW
Junction Temperature	$T_J$	+150	$^{\circ}\text{C}$
Storage Temperature	$T_{STG}$	-65 ~ +150	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS ( $T_J=25^{\circ}\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CE}=1\text{V}, I_E=0$			1	$\mu\text{A}$
Emitter Cutoff Current	$I_{EBO}$	$V_{CE}=1\text{V}, I_C=0$			1	$\mu\text{A}$
DC Current Gain	$h_{FE}$	$V_{CE}=3\text{V}, I_C=7\text{mA}$	40		250	
Transition Frequency	$f_T$	$V_{CE}=3\text{V}, I_C=7\text{mA}$		4.5		GHz
Feedback Capacitance	$C_{re}$	$V_{CE}=3\text{V}, I_E=0, f=1\text{MHz}$		0.7		pF

Note: Pulsed:  $P_W \leq 350\mu\text{s}$ , Duty Cycle  $\leq 2\%$ .

■ CLASSIFICATION OF  $h_{FE}$

RANK	R23	R24	R25
RANGE	40 ~ 80	70 ~ 140	125 ~ 250

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.