

5N65-HC

Power MOSFET

5A, 650V N-CHANNEL
POWER MOSFET


■ DESCRIPTION

The UTC **5N65-HC** is a high voltage power MOSFET designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and high rugged avalanche characteristics. This power MOSFET is usually used in high speed switching applications of switching power supplies and adaptors.

■ FEATURES

- * $R_{DS(ON)} < 2.3 \Omega$ @ $V_{GS} = 10$ V, $I_D = 2.5$ A
- * Fast switching capability
- * Avalanche energy tested
- * Improved dv/dt capability, high ruggedness

■ SYMBOL

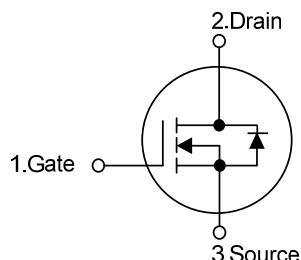

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
5N65L-TF1-T	5N65G-TF1-T	TO-220F1	G	D	S	Tube
5N65L-TF3-T	5N65G-TF3-T	TO-220F	G	D	S	Tube
5N65L-TM3-T	5N65G-TM3-T	TO-251	G	D	S	Tube
5N65L-TN3-R	5N65G-TN3-R	TO-252	G	D	S	Tape Reel
5N65L-TMN2-T	5N65G-TMN2-T	TO-251NS2	G	D	S	Tube

Note: Pin Assignment: G: Gate D: Drain S: Source

5N65G-TF1-T



(1)Packing Type



(2)Package Type

(3)Green Package


(1) T: Tube, R: Tape Reel

(2) TF1: TO-220F1, TF3: TO-220F, TM3: TO-251

TN3: TO-252, TMS2: TO-251NS2

(3) G: Halogen Free and Lead Free, L: Lead Free

■ MARKING

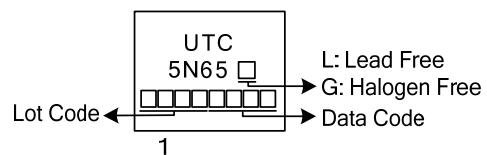

■ ABSOLUTE MAXIMUM RATINGS ($T_c = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	650	V
Gate-Source Voltage		V_{GSS}	± 30	V
Continuous Drain Current		I_D	5	A
Pulsed Drain Current (Note 2)		I_{DM}	20	A
Avalanche Energy	Single Pulsed (Note 3)	E_{AS}	43	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	3	V/ns
Power Dissipation	TO-220F/TO-220F1	P_D	36	W
	TO-251/TO-252		54	W
	TO-251NS2			
Junction Temperature		T_J	+150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature.

3. $L = 16.8\text{mH}$, $I_{AS} = 2.26\text{A}$, $V_{DD} = 50\text{V}$, $R_G = 25 \Omega$, Starting $T_J = 25^\circ\text{C}$

4. $I_{SD} \leq 5.0\text{A}$, $di/dt \leq 200\text{A}/\mu\text{s}$, $V_{DD} \leq BV_{DSS}$, Starting $T_J = 25^\circ\text{C}$

■ THERMAL DATA

PARAMETER		SYMBOL	RATING	UNIT
Junction to Ambient	TO-220F/TO-220F1	θ_{JA}	62.5	$^\circ\text{C/W}$
	TO-251/TO-252		110	$^\circ\text{C/W}$
	TO-251NS2			
Junction to Case	TO-220F/TO-220F1	θ_{JC}	3.47	$^\circ\text{C/W}$
	TO-251/TO-252		2.3	$^\circ\text{C/W}$
	TO-251NS2			


■ ELECTRICAL CHARACTERISTICS ($T_J=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}} = 0\text{V}, I_{\text{D}} = 250\mu\text{A}$	650			V
Drain-Source Leakage Current	I_{DSS}	$V_{\text{DS}} = 650\text{V}, V_{\text{GS}} = 0\text{V}$		10		μA
Gate- Source Leakage Current	Forward	$V_{\text{GS}} = 30\text{V}, V_{\text{DS}} = 0\text{V}$		100		nA
	Reverse	$V_{\text{GS}} = -30\text{V}, V_{\text{DS}} = 0\text{V}$		-100		nA
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{\text{GS}(\text{TH})}$	$V_{\text{DS}} = V_{\text{GS}}, I_{\text{D}} = 250\mu\text{A}$	2.0		4.0	V
Static Drain-Source On-State Resistance	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}} = 10\text{V}, I_{\text{D}} = 2.5\text{A}$			2.3	Ω
DYNAMIC CHARACTERISTICS						
Input Capacitance	C_{ISS}	$V_{\text{DS}}=25\text{V}, V_{\text{GS}}=0\text{V}, f=1.0 \text{ MHz}$		611		pF
Output Capacitance	C_{OSS}			79		pF
Reverse Transfer Capacitance	C_{RSS}			7.5		pF
SWITCHING CHARACTERISTICS						
Total Gate Charge (Note 1)	Q_G	$V_{\text{DS}}=100\text{V}, V_{\text{GS}}=10\text{V}, I_{\text{D}}=5.0\text{A}, I_{\text{D}}=100\mu\text{A}$ (Note 1, 2)		17		nC
Gate-Source Charge	Q_{GS}			6.3		nC
Gate-Drain Charge	Q_{GD}			4.7		nC
Turn-On Delay Time (Note 1)	$t_{\text{D}(\text{ON})}$	$V_{\text{DD}}=30\text{V}, V_{\text{GS}}=10\text{V}, I_{\text{D}} = 5.0\text{A}, R_{\text{G}}=25\Omega$ (Note 1, 2)		11		ns
Turn-On Rise Time	t_R			12		ns
Turn-Off Delay Time	$t_{\text{D}(\text{OFF})}$			50		ns
Turn-Off Fall Time	t_F			26		ns
DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS						
Maximum Continuous Drain-Source Diode Forward Current	I_S				5	A
Maximum Pulsed Drain-Source Diode Forward Current	I_{SM}				20	A
Drain-Source Diode Forward Voltage	V_{SD}	$I_S=5.0\text{A}, V_{\text{GS}}=0\text{V}$			1.4	V
Body Diode Reverse Recovery Time	t_{rr}	$I_S=5.0\text{A}, V_{\text{GS}}=0\text{V} \text{ di/dt}=100\text{A}/\mu\text{s}$		301		ns
Body Diode Reverse Recovery Charge	Q_{rr}			1.96		μC


Notes: 1. Pulse Test: Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$.

2. Essentially independent of operating temperature.


■ TEST CIRCUITS AND WAVEFORMS

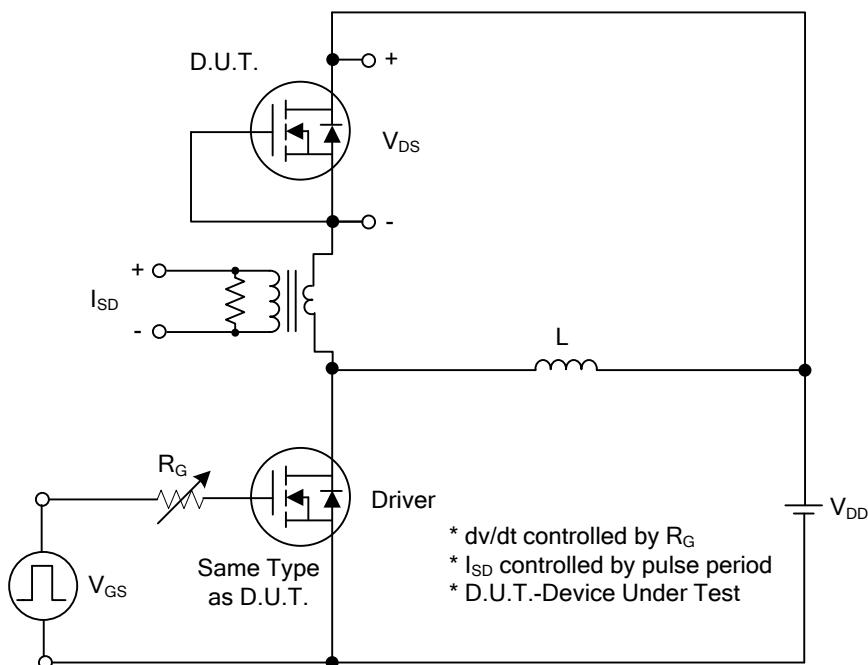


Peak Diode Recovery dv/dt Test Circuit

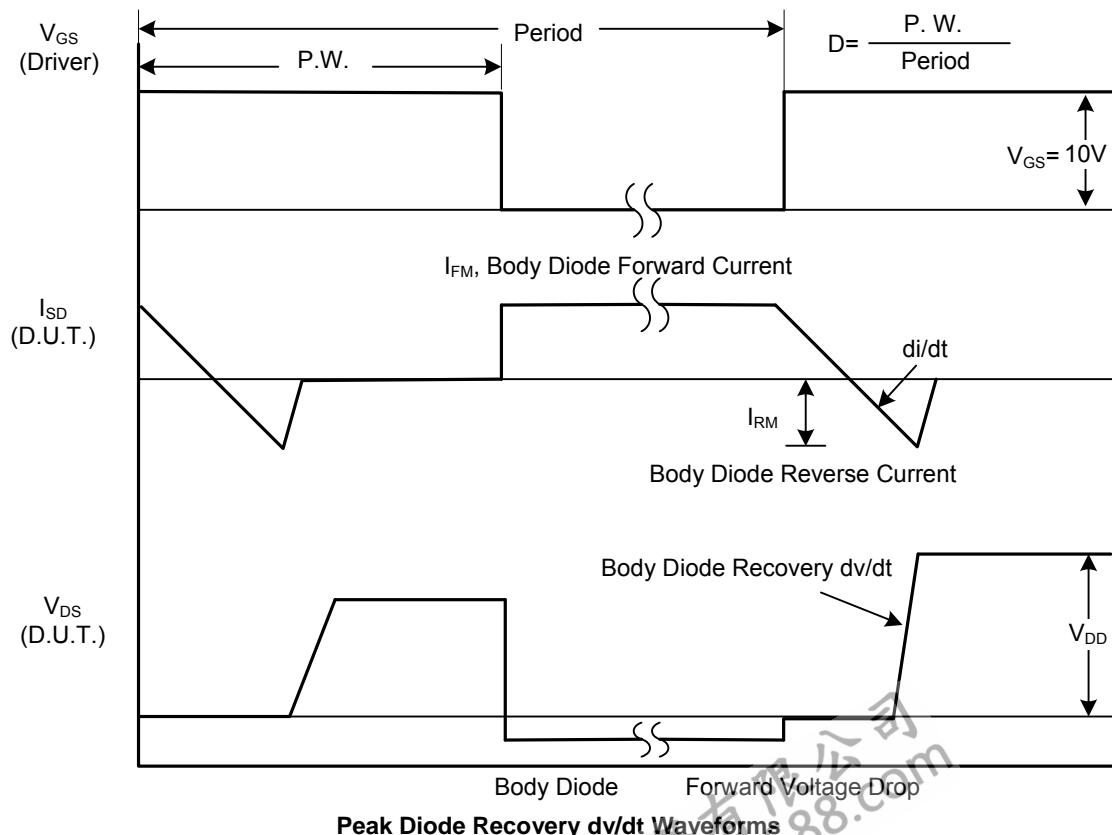


■ TEST CIRCUITS AND WAVEFORMS (Cont.)

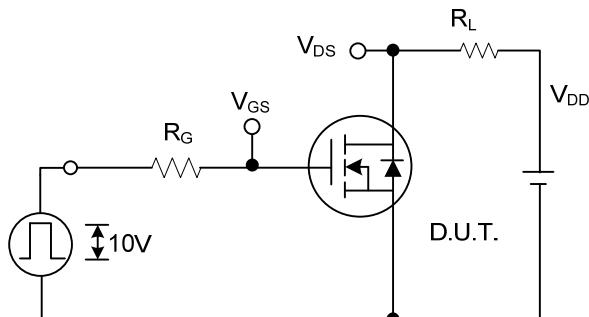


Switching Test Circuit

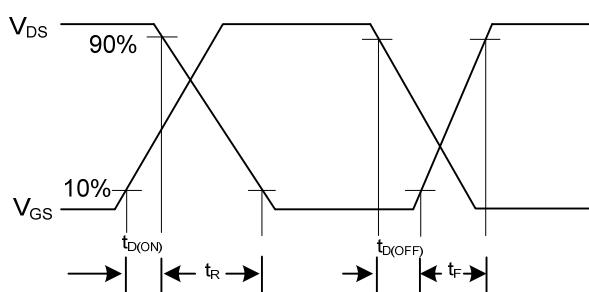


Switching Waveforms

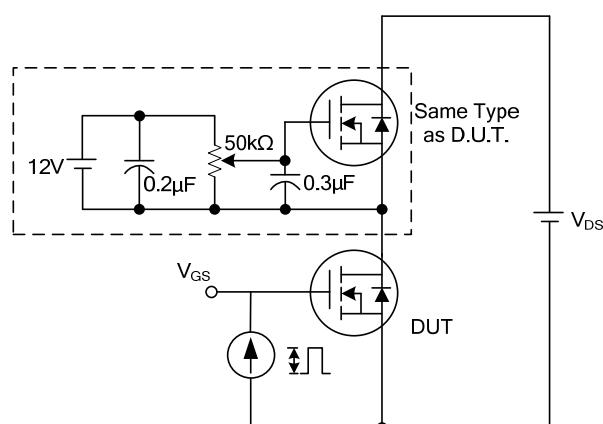


Gate Charge Test Circuit

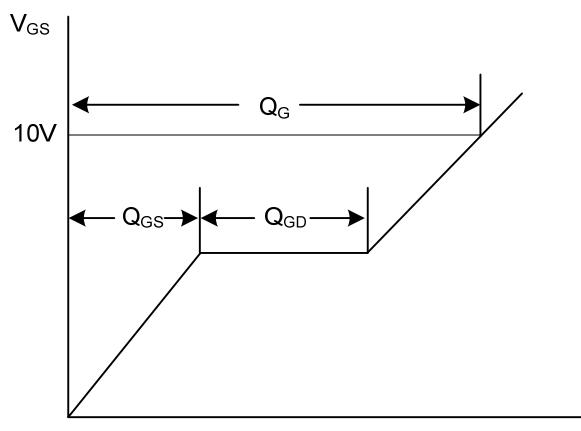

Gate Charge Waveform


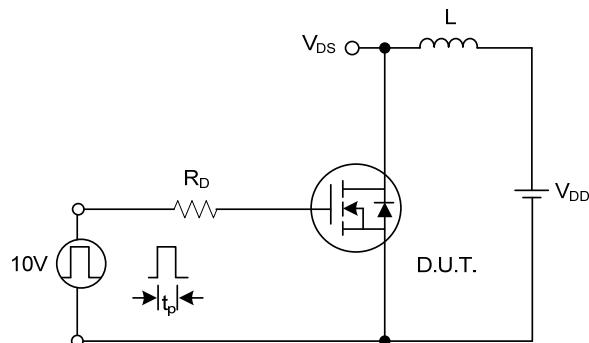


Unclamped Inductive Switching Test Circuit

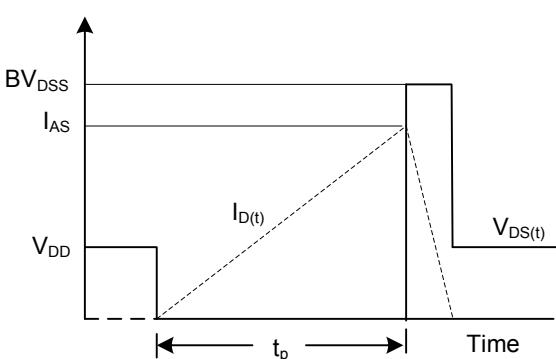

Unclamped Inductive Switching Waveforms

- TYPICAL CHARACTERISTICS

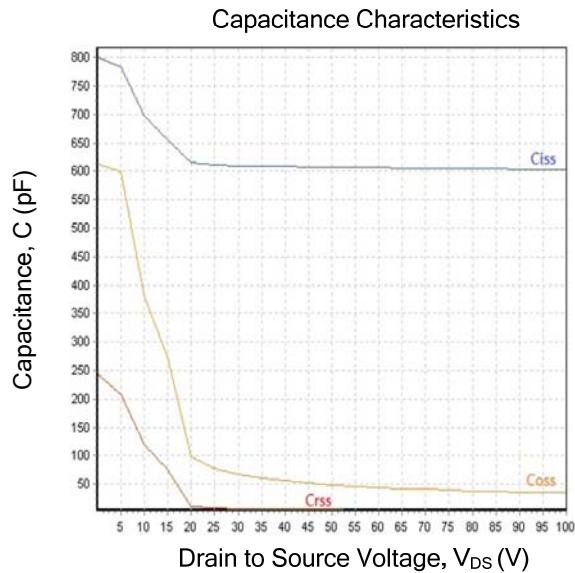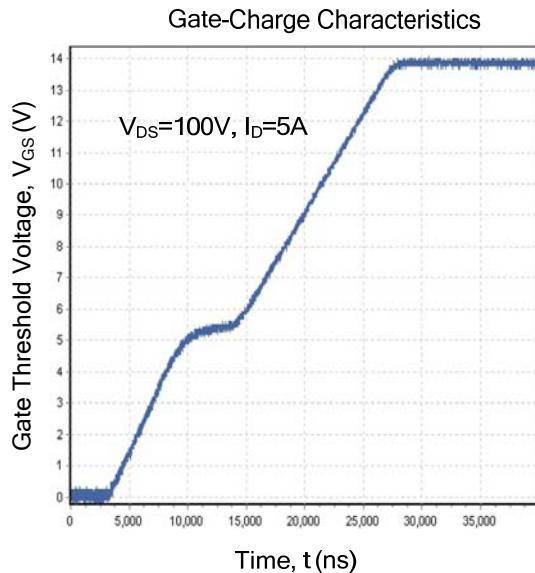

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.